Tutorial 3: Generating *in-silico* microscopy image with different I0 and fs

Subhamoy Mahajan

28 Dec, 2020

1. Generate PSF.

In this tutorial, we will create images for two different fs and three different I0 for each fs. Since we created the PSF for fs = 800 in Tutorial 1, we can reuse these files. Additionally, we will craete images with fs = 600. To create PSF with this fs, we just change the value of fs in run_genpsf.py provided in Tutorial 1, and run it.

term\$ python run_genpsf.py

2. Generate in-silico monochrome image data files

This step, is similar to Tutorial 1. Instead of "parameter.dat", we have two parameter files "param_800.dat" and "param_600.dat". The file "param_800.dat" is identical to "parameter.dat". The only difference between "param_600.dat" and "param_800.dat" is the value of "f". It is 600 in the former and 800 in the later.

The monochrome image data files is created using the commands,

```
term$ ../../gen_mono -p param_800.dat -f dp100.gro -o img100 term$ ../../gen_mono -p param_600.dat -f dp100.gro -o img100
```

3. Generate colored *in-silico* microscopy images

To generate the images with different maximum intensity I_0 we use the script gen_I0_fs.sh,

```
term$ bash gen_IO_fs.sh
```


In the script, value of fs is changed using the replace function of sed,

```
sed 's/fs=.*/fs=600/g' png_param.dat > foo.dat
sed 's/fs=.*/fs=800/g' png_param.dat > foo.dat
```

Similarly value of I0 (both lam1 and lam2) is channel using replace function of sed over a for loop,

This creates PNG files: $img100_fs600_T1_I_0.1_0.1.png$, $img100_fs600_T1_I_0.2_0.2.png$, $img100_fs600_T1_I_0.3_0.3.png$, $img100_fs800_T1_I_0.1.png$, $img100_fs800_T1_I_0.2_0.2.png$, and , $img100_fs800_T1_I_0.3_0.3.png$.

Images for fs = 600: I0 = 0.1 (left), 0.2 (middle), and 0.3 (right)

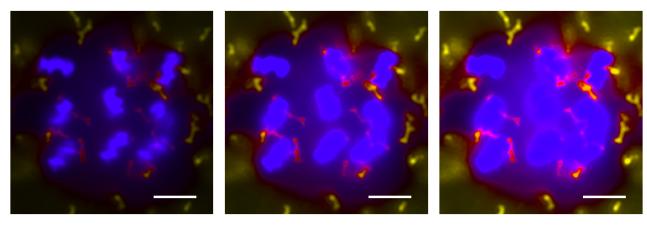

Images for fs = 800: I0 = 0.1 (left), 0.2 (middle), and 0.3 (right)

