

Hello World RESTful Web Service

```
package com.cognizant.spring_learn.controller;

import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import org.springframework.web.bind.annotation.GetMapping;
import org.springframework.web.bind.annotation.RestController;

@RestController
class HelloController {


    private static final Logger LOGGER =
        LoggerFactory.getLogger(HelloController.class);

    @GetMapping("/hello")
    public String sayHello() {

        LOGGER.info("START");

        LOGGER.info("END");

        return "Hello Cognizant!!";
    }
}
```

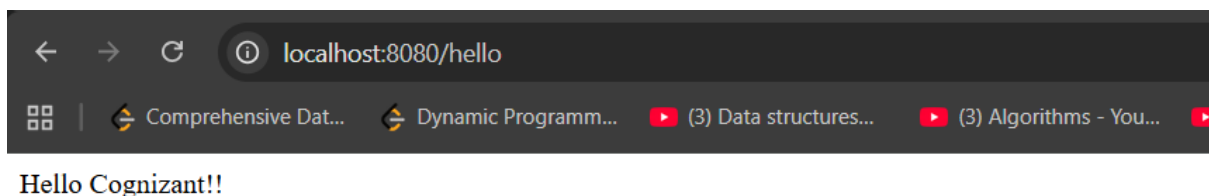

```

@RestController
public class CountryController {

    private static final Logger LOGGER = 2 usages
        LoggerFactory.getLogger( clazz: CountryController.class);

    @RequestMapping("/country")
    public Country getCountryIndia() {

        LOGGER.info("START");

        ApplicationContext context =
            new ClassPathXmlApplicationContext( configLocation: "country.xml");

        Country country = context.getBean( name: "country", requiredType: Country.class);

        LOGGER.info("END");

        return country;
    }
}

```

```

{
    "code": "IN",
    "name": "India"
}


```

REST - Get all countries

```

@GetMapping("/countries")
@SuppressWarnings("unchecked")
public List<Country> getAllCountries() {
    LOGGER.info("START");
    ApplicationContext context =
        new ClassPathXmlApplicationContext("country.xml");
    List<Country> countries =
        (List<Country>) context.getBean("countryList");
    LOGGER.info("END");
    return countries;
}


```

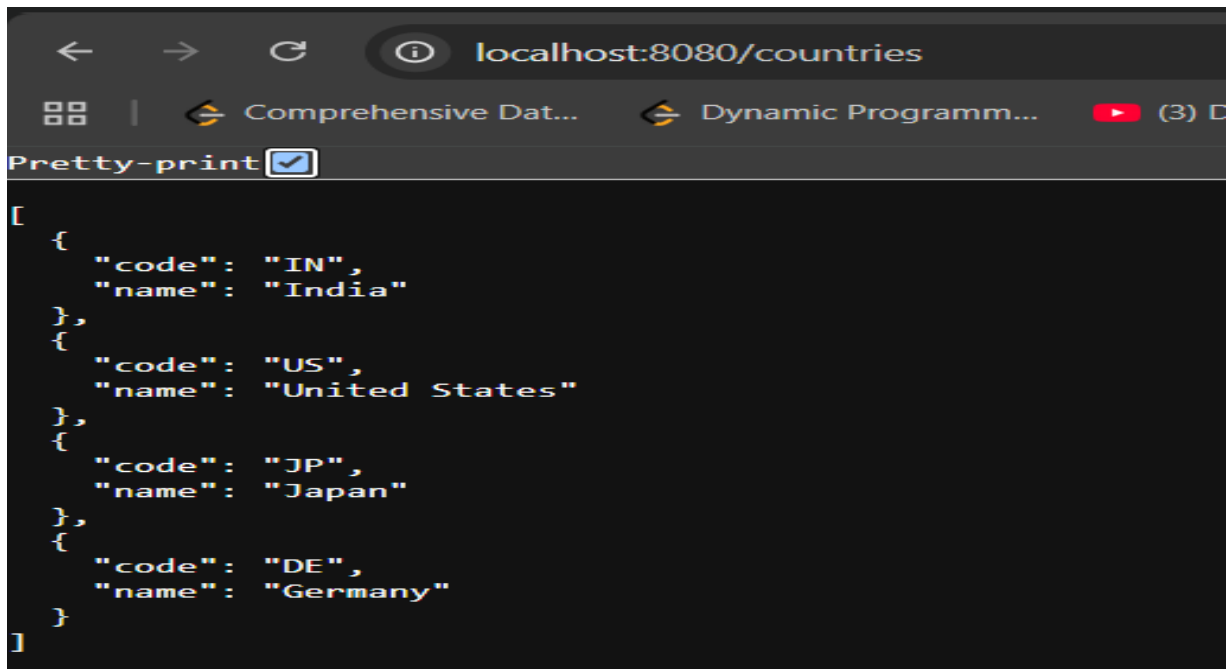

```
[
  {
    "code": "IN",
    "name": "India"
  },
  {
    "code": "US",
    "name": "United States"
  },
  {
    "code": "JP",
    "name": "Japan"
  },
  {
    "code": "DE",
    "name": "Germany"
  }
]
```

REST - Get country based on country code

```
@GetMapping("/countries/{code}")
public Country getCountry(@PathVariable String code) {
    LOGGER.info("START");
    Country country = countryService.getCountry(code);
    LOGGER.info("END");
    return country;
}
```

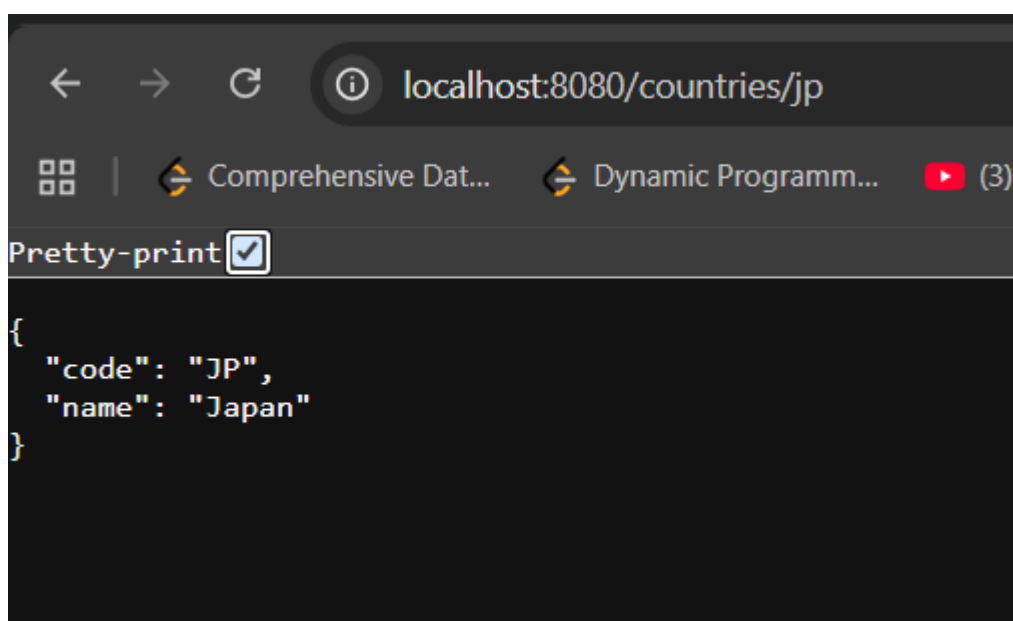

```
{
  "code": "JP",
  "name": "Japan"
}
```

Created a service Class for this

```
.java  Country.java  helloController.java  CountryController.java  country.xml  CountryService.java x
10  @Service
11  public class CountryService {
12
13      @SuppressWarnings("unchecked") no usages
14      public Country getCountry(String code) {
15
16          ApplicationContext context =
17              new ClassPathXmlApplicationContext("country.xml");
18
19          List<Country> countries =
20              (List<Country>) context.getBean("countryList");
21
22          for (Country country : countries) {
23              if (country.getCode().equalsIgnoreCase("code")) {
24                  return country;
25              }
26          }
27
28          return null;
29      }
30  }
```

Country country

spring-learn