

1. Student – Default Constructor

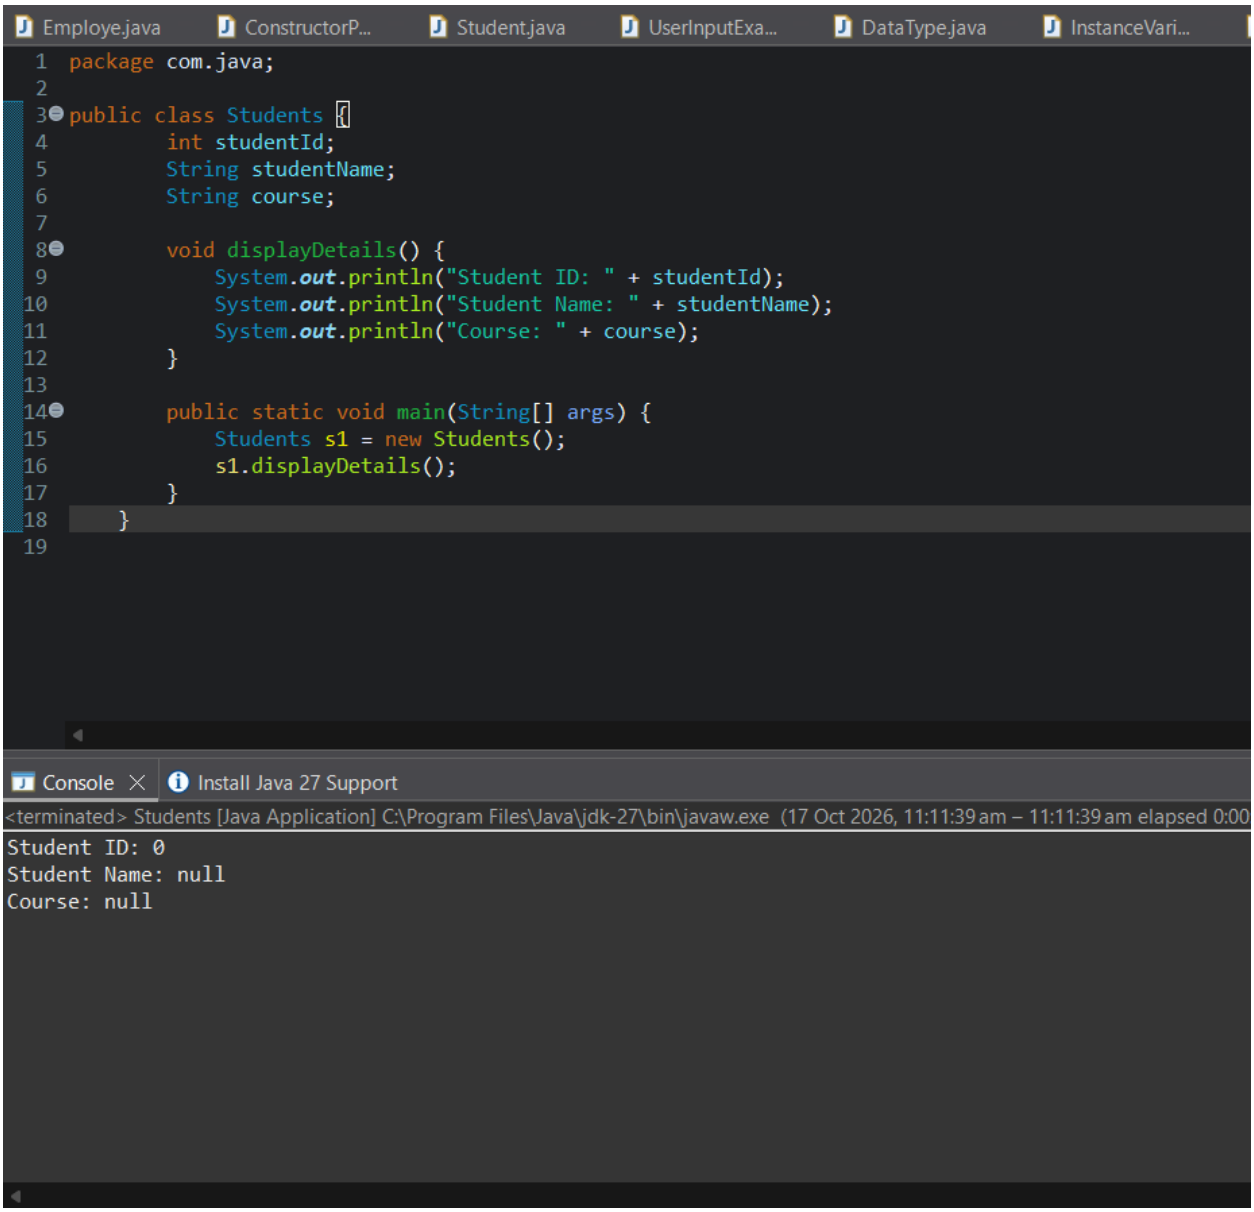

2. Bank Account – No-Argument Constructor

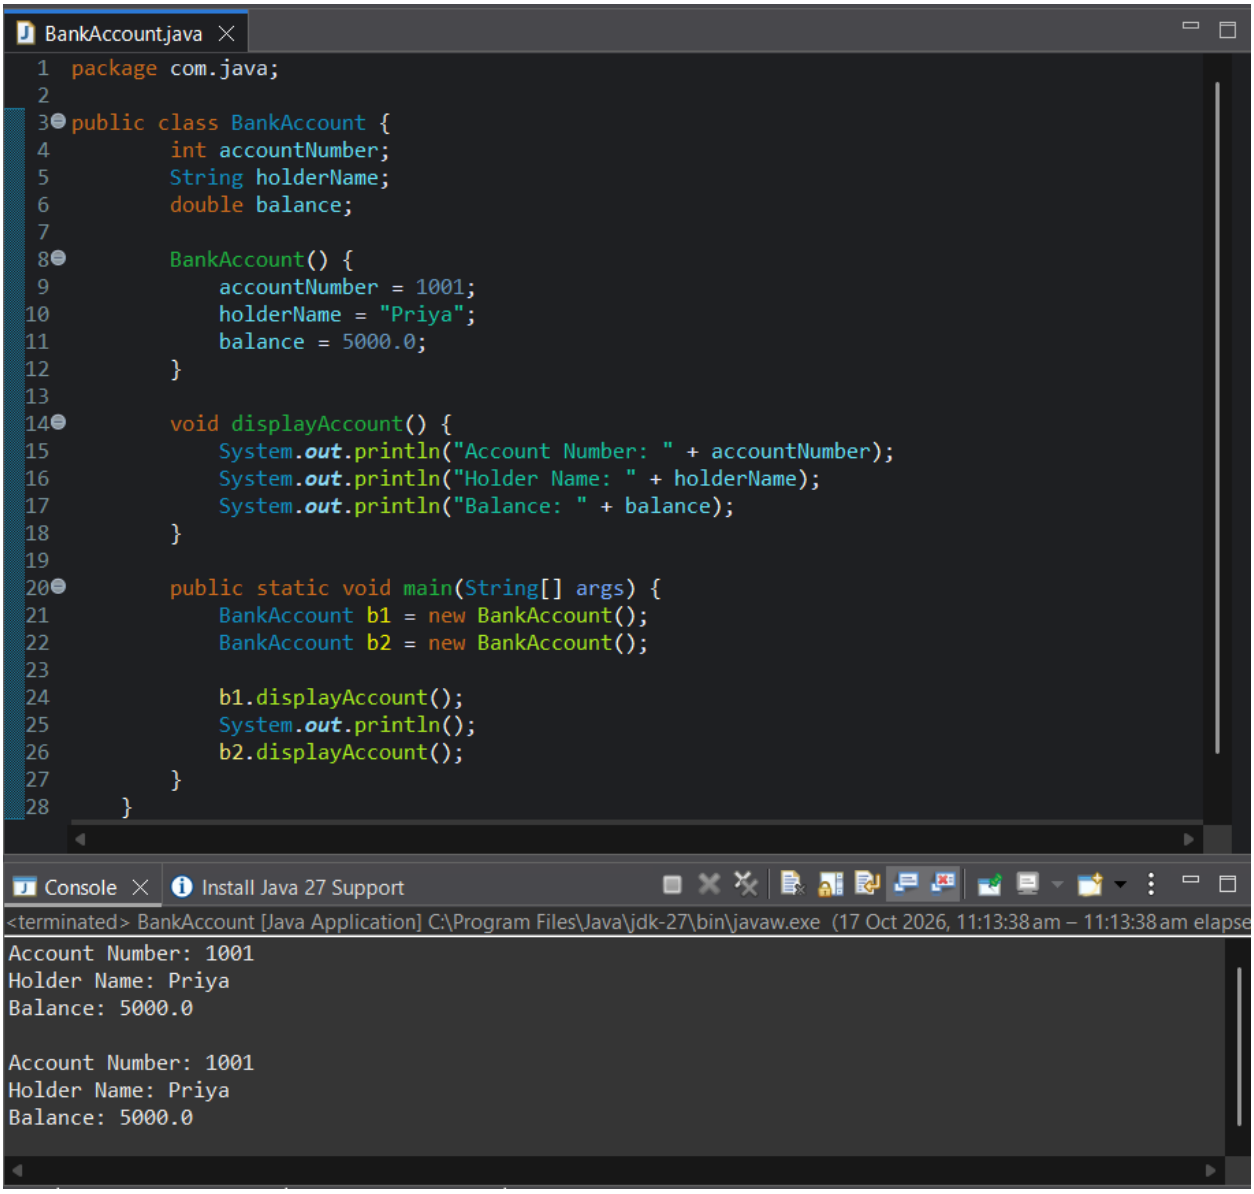

3. Employee – Parameterized Constructor

Employee.java

```java
package com.java;

public class Employee {
        int employeeId;
        String employeeName;
        double salary;


        Employee(int employeeId, String employeeName, double salary) {
            this.employeeId = employeeId;
            this.employeeName = employeeName;
            this.salary = salary;
        }

        double calculateAnnualSalary() {
            return salary * 12;
        }

        void displayDetails() {
            System.out.println("Employee ID: " + employeeId);
            System.out.println("Employee Name: " + employeeName);
            System.out.println("Monthly Salary: " + salary);
            System.out.println("Annual Salary: " + calculateAnnualSalary());
            System.out.println();
        }

        public static void main(String[] args) {
            Employee e1 = new Employee(101, "Arun", 25000);
            Employee e2 = new Employee(102, "Divya", 35000);
            Employee e3 = new Employee(103, "Kumar", 40000);

            e1.displayDetails();
            e2.displayDetails();
            e3.displayDetails();
        }
    }
```

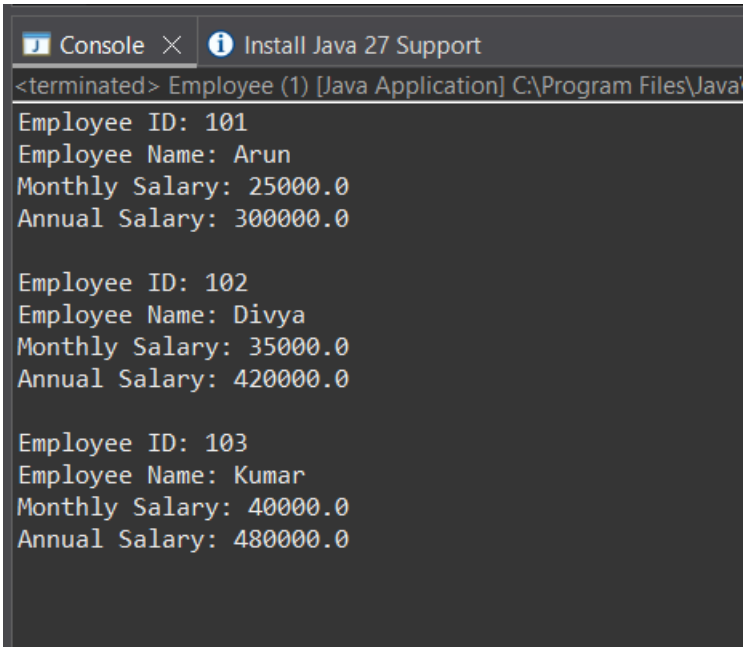
Console
Install Java 27 Support
<terminated> Employee (1) [Java Application] C:\Program Files\Java
Employee ID: 101
Employee Name: Arun
Monthly Salary: 25000.0
Annual Salary: 300000.0
Employee ID: 102
Employee Name: Divya
Monthly Salary: 35000.0
Annual Salary: 420000.0
Employee ID: 103
Employee Name: Kumar
Monthly Salary: 40000.0
Annual Salary: 480000.0

4. Product – Constructor Overloading

Employee.java | Product.java

```java
package com.java;

public class Product {
        int productId;
        String productName;
        double price;

        Product() {
            productId = 0;
            productName = "Unknown";
            price = 0.0;
        }

        Product(int productId, String productName) {
            this.productId = productId;
            this.productName = productName;
            price = 100.0;
        }

        Product(int productId, String productName, double price) {
            this.productId = productId;
            this.productName = productName;
            this.price = price;
        }

        void displayDetails() {
            System.out.println("Product ID: " + productId);
            System.out.println("Product Name: " + productName);
            System.out.println("Price: " + price);
            System.out.println();
        }

        public static void main(String[] args) {
            Product p1 = new Product();
            Product p2 = new Product(101, "Laptop");
            Product p3 = new Product(102, "Mobile", 25000.0);
```

```
25
26          void displayDetails() {
27              System.out.println("Product ID: " + productId);
28              System.out.println("Product Name: " + productName);
29              System.out.println("Price: " + price);
30              System.out.println();
31          }
32
33          public static void main(String[] args) {
34              Product p1 = new Product();
35              Product p2 = new Product(101, "Laptop");
36              Product p3 = new Product(102, "Mobile", 25000.0);
37
38              p1.displayDetails();
39              p2.displayDetails();
40              p3.displayDetails();
41          }
42      }
43
44
```

Console

<terminated> Product [Java Application] C:\Program File

```
Product ID: 0
Product Name: Unknown
Price: 0.0

Product ID: 101
Product Name: Laptop
Price: 100.0

Product ID: 102
Product Name: Mobile
Price: 25000.0
```

5. Student Record – Copy Constructor

Employee.java | Product.java | StudentRecord.java


```java
package com.java;

public class StudentRecord {
        int rollNumber;
        String studentName;
        int marks;

        StudentRecord(int rollNumber, String studentName, int marks) {
            this.rollNumber = rollNumber;
            this.studentName = studentName;
            this.marks = marks;
        }

        StudentRecord(StudentRecord s) {
            this.rollNumber = s.rollNumber;
            this.studentName = s.studentName;
            this.marks = s.marks;
        }

        void displayDetails() {
            System.out.println("Roll Number: " + rollNumber);
            System.out.println("Student Name: " + studentName);
            System.out.println("Marks: " + marks);
            System.out.println();
        }
```

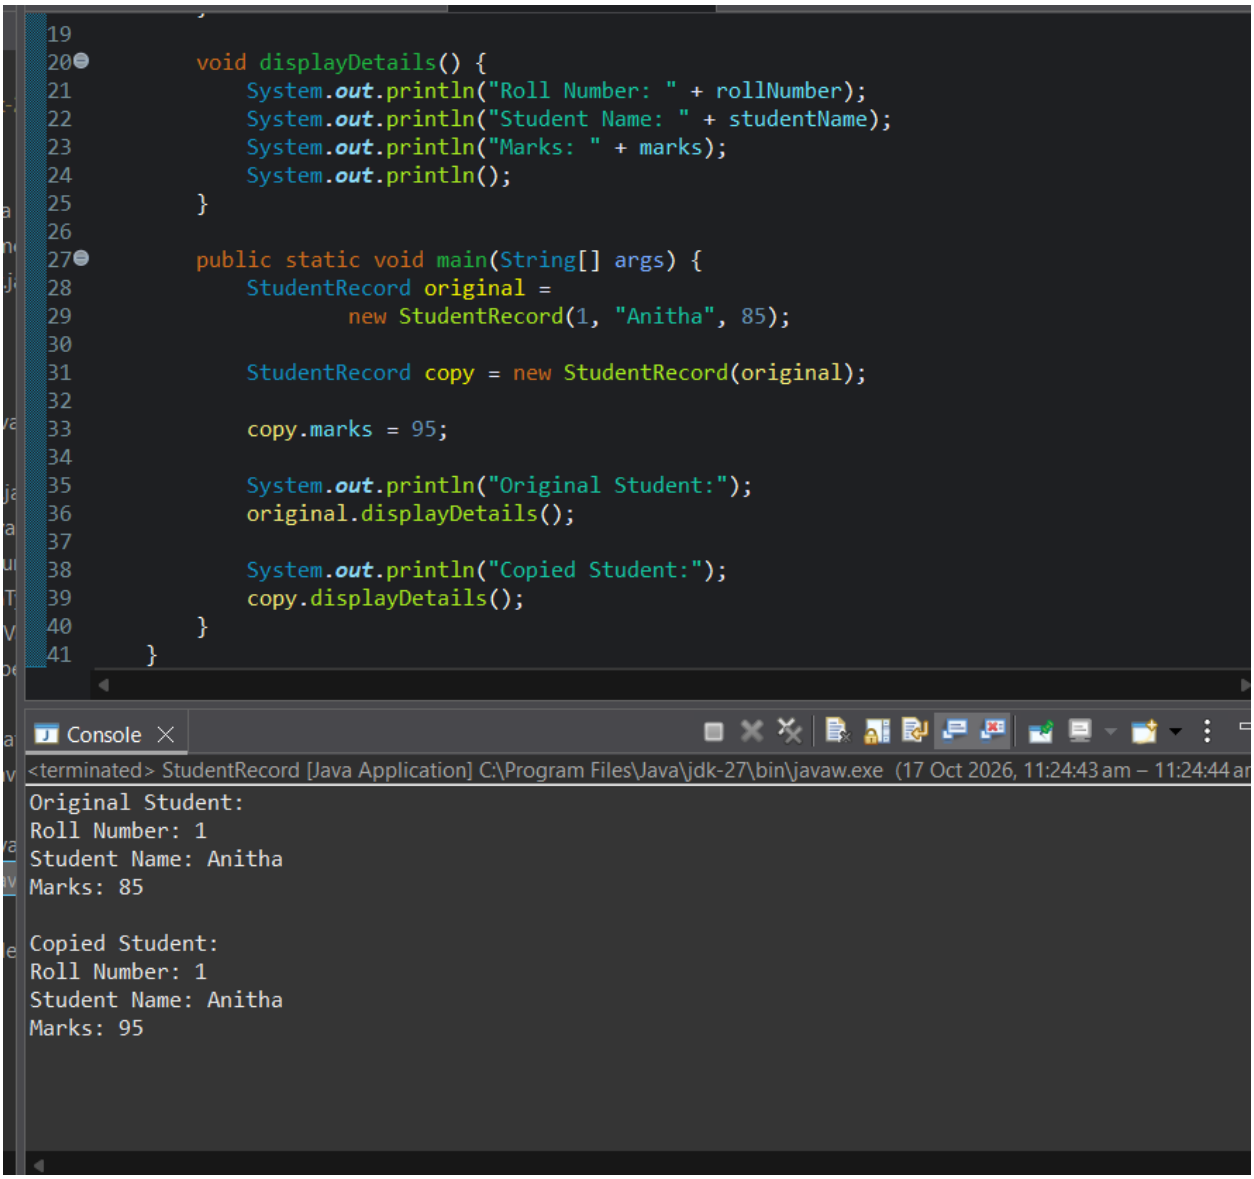

```
19
20      void displayDetails() {
21          System.out.println("Roll Number: " + rollNumber);
22          System.out.println("Student Name: " + studentName);
23          System.out.println("Marks: " + marks);
24          System.out.println();
25      }
26
27      public static void main(String[] args) {
28          StudentRecord original =
29                  new StudentRecord(1, "Anitha", 85);
30
31          StudentRecord copy = new StudentRecord(original);
32
33          copy.marks = 95;
34
35          System.out.println("Original Student:");
36          original.displayDetails();
37
38          System.out.println("Copied Student:");
39          copy.displayDetails();
40      }
41  }
```

Console

<terminated> StudentRecord [Java Application] C:\Program Files\Java\jdk-27\bin\javaw.exe (17 Oct 2026, 11:24:43 am – 11:24:44 ar

```
Original Student:
Roll Number: 1
Student Name: Anitha
Marks: 85

Copied Student:
Roll Number: 1
Student Name: Anitha
Marks: 95
```