A Mini Project Report

On

SCIENTIFIC CALCULATOR

Submitted in partial fulfillment of requirements for the Course CSE18R272 - JAVA PROGRAMMING

Bachelor's of Technology

In

Computer Science and Engineering

Submitted By

M. MANONMANI 9918004067

S. SUBHASHINI 9918004114

Under the guidance of

Dr. R. RAMALAKSHMI

(Associate Professor)



Department of Computer Science and Engineering Kalasalingam Academy of Research and Education Anand Nagar, Krishnankoil-626126 APRIL 2020

ABSTRACT

A scientific calculator is a type of electronic calculator, usually but not always handheld, designed to calculate problem in science, engineering, and mathematics. Scientific calculators are used widely in situations that require quick access to certain mathematical functions, those that were once looked up in mathematical tables, such as trigonometric functions or algorithms. They are also used for calculations of very large or very small numbers, as in some aspects of astronomy, physics and chemistry. Calculator to help you solve trigonometry problems involving sine, cosine, tangent, their inverses, and their hyperbolic functions.

DECLARATION

I hereby declare that the work presented in this report entitled "Scientific calculator", in partial fulfilment of the requirements for the course CSE18R272- Java Programming and submitted in Department of Computer Science and Engineering, Kalasalingam Academy of Research and Education (Deemed to be University) is an authentic record of our own work carried out during the period from Jan 2020 under the guidance of Mr. Dr. R. Ramalakshmi (Associate Professor).

The work reported in this has not been submitted by me for the award of any other degree of this or any other institute.

M.MANONMANI 9918004067 S.SUBHASHINI 9918004114

ACKNOWLEDGEMENT

I express deep sense of gratitude to "Kalvivallal" Thiru. T.Kalaslingam B.com., Founder Chairman, "Ilayavallal" Dr.K.Sridharan Ph.D., Chancellor, Dr.S.ShasiAnand,Ph.D., Vice President (Academic), Mr.S.ArjunKalasalingam M.S., Vice President (Administration), Dr.R.Nagaraj Vice-Chancellor, Dr.V.Vasudevan Ph.D., Registar, Dr.P.Deepalakshmi Ph.D., Dean (School of Computing). And also a special thanks to Dr.A.FRANCIS SAVIOUR DEVARAJ. Head Department of CSE, Kalasalingam Academy of Research and Education forgranting the permisson and providing necessary facilities to carry out project work.

I would like to express my special appreciation and profound thanks to my enthusiastic Project Supervisor Dr.R.Ramalakshmi Ph.D,Associate Professor at Kalasalingam Academy of Research and Education [KARE] for her inspiring guidance, constant encouragement with my work during all stages. I am extremely glad that I had a chance to do my Project under my Guide, who truly practices and appreciates deep thinking . I will be forever indebted to my Guide for all the time he has spent with me in discussion. And during the most difficult times when writing this report, he gave me the moral support and the freedom I needed to move on.

M.MANONMANI 9918004067 S.SUBHASHINI 9918004114

TABLE OF CONTENTS

1. ABSTRACT
2. CANDIDATE'S DECLARATION i
3. ACKNOWLEDGEMENT ii
4. TABLE OF CONTENTS iv
5. LIST OF FIGURES
Chapter 1 INTRODUCTION
Chapter 2 PROJECT DESCRIPTION
Chapter 3 CONCLUSION
REFERENCES
APPENDIX

LIST OF FIGURES

2.1	Figure Example.													2
3.1	OUTPUT													22

Chapter 1

INTRODUCTION

The project Scientific Calculator is designed to automate the calculation procedure. Making less paper and automatic the process of calculation. Modern Scientific calculator generally have more feature set differs between manufacture and modules.

1.0.1 Objectives

- 1. To create a scientific calculator in JAVA.
- 2. Use the scientific calculator to evaluate expressions
- 3. To build a simple project on java.

Chapter 2

PROJECT DESCRIPTION

The project code in java AWT (Abstract Window ToolKit) is an API to develop GUI or window-based application in java. The java.awt package provides classes for AWT such as TextField, Lable etc. The javax swing API such as JButton, JTextField etc. ActionListeners are used for JButtons and handling all action events. It can be used by the implements keyword to the class definition. The component class is the root of all AWT components. Panel is a simplest container space in which an attach any other component. It inherits the Container class.




Figure 2.1: Figure Example

Chapter 3

CONCLUSION

This project augments both the normal brain and the defective brain. It display the outer view and the internal view of both the brain structures. The future enhancement may include the addition of dissection properly to the augmented object. When the user has the ability to dissect the object it would the understandability of the structure. This can also be applied for other deformities in the human anatomy.

Appendices

SOURCE CODE

```
import java.awt.*;
import javax.swing.*;
import java.awt.event.*;
import javax.swing.event.*;
public class calci extends JFrame implements

→ ActionListener

Container contentpane;
JPanel DisplayPanel, ControlPanel;
JTextField txt;
JButton one, two, three, four, five, six, seven, eight,
   \hookrightarrow nine, zero;
JButton plus, min, mul, div, cap, colon, openbrace,
   \hookrightarrow CLR, exp;
JButton eq, addSub, dot, memread, memcancel, memplus;
JButton sqrt, sin, cos, tan, onebyx;
double tempnum, tempnextnum, result, ans;
static double ValueInMem;
int num1 = 0, num2 = 0;
int MemPlusFlag = 1,
RepeatFlag = 0;
char ch;
calci()
contentpane = getContentPane();
contentpane.setLayout(new BorderLayout());
JPanel DisplayPanel = new JPanel();
txt = new JTextField(30);
txt.setHorizontalAlignment(SwingConstants.RIGHT);
txt.addKeyListener(
new KeyAdapter()
public void keyTyped(KeyEvent keyevent)
char ch = keyevent.getKeyChar();
if (ch >= '0' && ch <= '9')
```

```
{
}
else
keyevent.consume();
});
DisplayPanel.add(txt);
ControlPanel = new JPanel();
contentpane.add("Center", ControlPanel);
contentpane.add("North", DisplayPanel);
ControlPanel.setLayout (new GridLayout (7,4,5,5));
memcancel = new JButton("MC");
ControlPanel.add(memcancel);
memcancel.addActionListener(this);
one = new JButton("1");
ControlPanel.add(one);
one.addActionListener(this);
two = new JButton("2");
ControlPanel.add(two);
two.addActionListener(this);
three = new JButton("3");
ControlPanel.add(three);
three.addActionListener(this);
memread = new JButton("MR");
ControlPanel.add(memread);
memread.addActionListener(this);
four = new JButton("4");
ControlPanel.add(four);
four.addActionListener(this);
five = new JButton("5");
ControlPanel.add(five);
five.addActionListener(this);
six = new JButton("6");
ControlPanel.add(six);
six.addActionListener(this);
memplus = new JButton("M+");
ControlPanel.add(memplus);
memplus.addActionListener(this);
```

```
seven = new JButton("7");
ControlPanel.add(seven);
seven.addActionListener(this);
eight = new JButton("8");
ControlPanel.add(eight);
eight.addActionListener(this);
nine = new JButton("9");
ControlPanel.add(nine);
nine.addActionListener(this);
zero = new JButton("0");
ControlPanel.add(zero);
zero.addActionListener(this);
addSub = new JButton("+/-");
ControlPanel.add(addSub);
addSub.addActionListener(this);
dot = new JButton("."); //represents decimal point
ControlPanel.add(dot);
dot.addActionListener(this);
eq = new JButton("=");//get an answer
ControlPanel.add(eq);
eq.addActionListener(this);
plus = new JButton("+");
ControlPanel.add(plus);
plus.addActionListener(this);
\min = \text{new JButton}("-");
ControlPanel.add(min);
min.addActionListener(this);
mul = new JButton("*");
ControlPanel.add(mul);
mul.addActionListener(this);
div = new JButton("/");
div.addActionListener(this);
ControlPanel.add(div);
cap = new JButton("^");
cap.addActionListener(this);
ControlPanel.add(cap);
colon = new JButton(":");
colon.addActionListener(this);
ControlPanel.add(colon);
openbrace = new JButton("{");
```

```
openbrace.addActionListener(this);
ControlPanel.add(openbrace);
closebrace = new JButton("}");
closebrace.addActionListener(this);
ControlPanel.add(closebrace);
openbracket = new JButton("(");
openbracket.addActionListener(this);
ControlPanel.add(openbracket);
closebracket = new JButton(")");
closebracket.addActionListener(this);
ControlPanel.add(closebracket);
prec = new JButton("%");
prec.addActionListener(this);
ControlPanel.add(prec);
sqrt = new JButton("Sqrt");
ControlPanel.add(sqrt);
sqrt.addActionListener(this);
log = new JButton("LOG");
ControlPanel.add(log);
log.addActionListener(this);
sin = new JButton("SIN");
ControlPanel.add(sin);
sin.addActionListener(this);
cos = new JButton("COS");
ControlPanel.add(cos);
cos.addActionListener(this);
tan = new JButton("TAN");
ControlPanel.add(tan);
tan.addActionListener(this);
\exp = \text{new JButton}("Exp");
exp.addActionListener(this);
ControlPanel.add(exp);
onebyx = new JButton("1/x");
onebyx.addActionListener(this);
ControlPanel.add(onebyx);
CLR = new JButton("AC");
ControlPanel.add(CLR);
CLR. addActionListener(this);
setDefaultCloseOperation(JFrame.EXIT ON CLOSE);
```

```
public void actionPerformed(ActionEvent e)
String s = e.getActionCommand();
if (s.equals("1"))
if (RepeatFlag == 0)
txt.setText(txt.getText() + "1");
else
txt.setText("");
txt.setText(txt.getText() + "1");
RepeatFlag = 0;
if (s.equals("2"))
if (RepeatFlag == 0)
txt.setText(txt.getText() + "2");
else
txt.setText("");
txt.setText(txt.getText() + "2");
RepeatFlag = 0;
if (s.equals("3"))
if (RepeatFlag == 0)
txt.setText(txt.getText() + "3");
else
txt.setText("");
txt.setText(txt.getText() + "3");
RepeatFlag = 0;
```

```
if (s.equals("4"))
if (RepeatFlag == 0)
txt.setText(txt.getText() + "4");
else
txt.setText("");
txt.setText(txt.getText() + "4");
RepeatFlag = 0;
if (s.equals("5"))
if (RepeatFlag == 0)
txt.setText(txt.getText() + "5");
else
txt.setText("");
txt.setText(txt.getText() + "5");
RepeatFlag = 0;
if (s.equals("6"))
if (RepeatFlag == 0)
txt.setText(txt.getText() + "6");
else
txt.setText("");
txt.setText(txt.getText() + "6");
RepeatFlag = 0;
```

```
if (s.equals("7"))
if (RepeatFlag == 0)
txt.setText(txt.getText() + "7");
_{
m else}
txt.setText("");
txt.setText(txt.getText() + "7");
RepeatFlag = 0;
if (s.equals("8"))
if (RepeatFlag == 0)
txt.setText(txt.getText() + "8");
else
txt.setText("");
txt.setText(txt.getText() + "8");
RepeatFlag = 0;
if (s.equals("9"))
if (RepeatFlag == 0)
txt.setText(txt.getText() + "9");
else
txt.setText("");
txt.setText(txt.getText() + "9");
RepeatFlag = 0;
```

```
if (s.equals("0"))
if (RepeatFlag == 0)
txt.setText(txt.getText() + "0");
else
txt.setText("");
txt.setText(txt.getText() + "0");
RepeatFlag = 0;
if (s.equals("AC"))
txt.setText("");
num1 = 0;
num2 = 0;
RepeatFlag = 0;
if (s.equals("+/-"))
if (\text{num1} = 0)
txt.setText("-" + txt.getText());
num1 = 1;
}
_{
m else}
txt.setText(txt.getText());
if (s.equals("."))
if (num2 = 0)
txt.setText(txt.getText() + ".");
num2 = 1;
}
_{
m else}
```

```
txt.setText(txt.getText());
if(s.equals("+"))
if(txt.getText().equals(""))
txt.setText("");
tempnum = 0;
ch = '+';
else
tempnum = Double.parseDouble(txt.getText());
txt.setText("");
ch = '+';
num2 = 0;
num1 = 0;
txt.requestFocus();
if (s.equals("-"))
if (txt.getText().equals(""))
txt.setText("");
tempnum = 0;
ch = '-';
}
_{
m else}
num1 = 0;
num2 = 0;
tempnum = Double.parseDouble(txt.getText());
txt.setText("");
ch = '-';
txt.requestFocus();
```

```
if (s.equals("/"))
if (txt.getText().equals(""))
txt.setText("");
tempnum = 1;
ch = '/';
else
num1 = 0;
num2 = 0;
tempnum = Double.parseDouble(txt.getText());
\mathrm{ch} \ = \ ', ' \ ;
txt.setText("");
txt.requestFocus();
if (s.equals("*"))
if (txt.getText().equals(""))
txt.setText("");
tempnum = 1;
ch = '*';
else
num1 = 0;
num2 = 0;
tempnum = Double.parseDouble(txt.getText());
ch = '*';
txt.setText("");
txt.requestFocus();
if (s.equals("^"))
if(txt.getText().equals(""))
```

```
txt.setText("");
tempnum = 1;
ch = \dot{,} \dot{,} ;
else
num1 = 0;
num2 = 0;
tempnum = Double.parseDouble(txt.getText());
\mathrm{ch} = \dot{,} \dot{,} ;
txt.setText("");
txt.requestFocus();
if(s.equals(":"))
if(txt.getText().equals(""))
txt.setText("");
tempnum = 1;
ch = ': ';
}
_{
m else}
num1 = 0;
num2 = 0;
tempnum = Double.parseDouble(txt.getText());
ch = ': ';
txt.setText("");
txt.requestFocus();
if(s.equals("{"))
if (txt.getText().equals(""))
txt.setText("");
tempnum = 1;
ch = '\{';
```

```
else
num1 = 0;
num2 = 0;
tempnum = Double.parseDouble(txt.getText());
ch = '\{';
txt.setText("");
txt.requestFocus();
if(s.equals("}"))
if(txt.getText().equals(""))
txt.setText("");
tempnum = 1;
ch = ', ';
_{
m else}
num1 = 0;
num2 = 0;
tempnum = Double.parseDouble(txt.getText());
ch = ' \} ';
txt.setText("");
txt.requestFocus();
if(s.equals("("))
if(txt.getText().equals(""))
txt.setText("");
tempnum = 1;
ch = '(';
}
else
num1 = 0;
num2 = 0;
```

```
tempnum = Double.parseDouble(txt.getText());
ch = '(';
txt.setText("");
txt.requestFocus();
if(s.equals(")"))
if (txt.getText().equals(""))
txt.setText("");
tempnum = 1;
ch = ')';
else
num1 = 0;
num2 = 0;
tempnum = Double.parseDouble(txt.getText());
ch = ') ';
txt.setText("");
txt.requestFocus();
if(s.equals("%"))
if(txt.getText().equals(""))
txt.setText("");
tempnum = 1;
ch = \%;
else
num1 = 0;
num2 = 0;
tempnum = Double.parseDouble(txt.getText());
ch = '\%';
txt.setText("");
```

```
txt.requestFocus();
if (s.equals("MC"))
ValueInMem = 0;
txt.setText("");
if (s.equals("MR"))
txt.setText("");
txt.setText(txt.getText() + ValueInMem);
if (s.equals("M+"))
if (MemPlusFlag == 1)
ValueInMem = Double.parseDouble(txt.getText());
MemPlusFlag++;
else
ValueInMem += Double.parseDouble(txt.getText());
txt.setText("" + ValueInMem);
if (s.equals("LOG"))
if (txt.getText().equals(""))
txt.setText("");
else
ans = Math.log(Double.parseDouble(txt.getText()));
txt.setText("");
txt.setText(txt.getText() + ans);
if (s.equals("1/x"))
```

```
if (txt.getText().equals(""))
txt.setText("");
else
ans = 1 / Double.parseDouble(txt.getText());
txt.setText("");
txt.setText(txt.getText() + ans);
if (s.equals("Exp"))
if (txt.getText().equals(""))
txt.setText("");
else
ans = Math.exp(Double.parseDouble(txt.getText()));
txt.setText("");
txt.setText(txt.getText() + ans);
if (s.equals("Sqrt"))
if (txt.getText().equals(""))
txt.setText("");
else
ans = Math.sqrt(Double.parseDouble(txt.getText()));
txt.setText("");
txt.setText(txt.getText() + ans);
if (s.equals("SIN"))
if (txt.getText().equals(""))
```

```
txt.setText("");
else
ans = Math.sin(Double.parseDouble(txt.getText()));
txt.setText("");
{\tt txt.setText(txt.getText() + ans);}
if (s.equals("COS"))
if (txt.getText().equals(""))
txt.setText("");
else
ans = Math.cos(Double.parseDouble(txt.getText()));
txt.setText("");
txt.setText(txt.getText() + ans);
if (s.equals("TAN"))
if (txt.getText().equals(""))
txt.setText("");
else
ans = Math.tan(Double.parseDouble(txt.getText()));
txt.setText("");
txt.setText(txt.getText() + ans);
if (s.equals("="))
if (txt.getText().equals(""))
```

```
txt.setText("");
else
tempnextnum = Double.parseDouble(txt.getText());
switch (ch)
case '+':
result = tempnum + tempnextnum;
break;
case '-':
result = tempnum - tempnextnum;
break;
case ', ':
result = tempnum / tempnextnum;
break;
case '*':
result = tempnum * tempnextnum;
break;
txt.setText("");
txt.setText(txt.getText() + result);
RepeatFlag = 1;
txt.requestFocus();
public static void main(String args[])
calci c= new calci();
c.setTitle("My_Calculator");
c.pack();
c.setVisible(true);
```

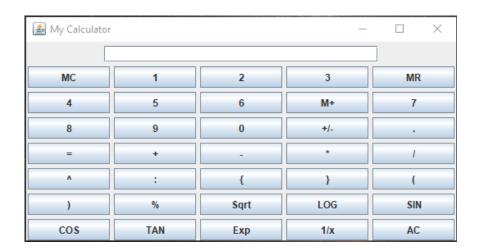


Figure 3.1: OUTPUT