

Answers to Practice Papers — 10

1. (c) Cardinality
2. (c) COMPUTE
3. (c) Delete
4. (c) Sharing of resources to cut down on the amount of equipment needed
5. (d) Tables
6. (a) Domain
7. (c) Union
8. (a) % age → no special allowed (b) S.I. This variable name is invalid since it contain dots(.)
(c) Adm No → no space should be there (d) invalid as it is a keyword.
9. (c) Protocol
10. (a) Wireless Fidelity
11. (a) To generate a sequence of numbers
12. (b) [3, 2, 1]
13. (c) [1, 2, 3, 4]
14. (a) 5 10
15. (a) A relative path is relative to the current working directory, while an absolute path is the full path from the root directory
16. (d) open("file.bin", "rb")
17. (a) Both A and R true and R is the correct explanation for A.
18. (a) A is true but R is false.
- 19.

```
A=[]
more = 'y'
while more=='y' or more=='Y':
    num=eval(input("Enter a number: "))
    A.append(num)
    more=input("Enter more data(y/n)? ")
#Now sort
N=len(A)
for i in range(1,N):
    for j in range(0,N-i):
        if A[j]>A[j+1]:
            temp=A[j]
            A[j]=A[j+1]
            A[j+1]=temp
#Now display
print("Sorted list is: ",A)
```

```
Enter a number: 5
Enter more data(y/n)? y
Enter a number: 1
Enter more data(y/n)? y
Enter a number: 8
Enter more data(y/n)? n
Sorted list is: [1, 5, 8]
```

20.

Internet	Intranet
• The internet is a public network that is accessible to anyone with an internet connection.	• An intranet is a private network that can only be accessed by authorized users within an organization.
• Internet is used to share information and resources globally.	• It is typically uses the same technologies as the internet, but is used to share information and resources within a company or organization.
• Anyone can access the Internet	• In this, anyone can't access the Intranet.

OR

Router	Gateway
• A router is a networking device that forwards data packets between computer networks. It determines the best path for forwarding the data based on its current understanding of the state of the network.	• A gateway is a device that acts as an entrance to another network. It is used to connect networks that use different communication protocols together and allows communication between different networks.
• The main function of a router is routing the traffic from one network to the other.	• The main function of a gateway is to translate one protocol to the other.

21. (a) @20 otnmx SC@

OR

(b) dict_items([('name', 'Aman'), ('age', 27), ('address', 'Delhi')])

22.

DDL	DML
• Stands for Data Definition Language	• Stands for Data Manipulation Language.
• DDL is used to define the structure of a database	• DML is used to manipulate the data within the database.
• It is used to create/modify/remove the database schemas.	• It is used to insert/modify/remove the records (rows) of the table.
• For Example-Create, Alter, Drop	• For Example-Insert, Update, Delete

23. (a) (i) POP–Post Office Protocol

(ii) File Transfer Protocol

OR

(b) In large networks, there can be multiple paths from sender to receiver. The switching technique will decide the best route for data transmission. It is used to connect the systems for making one-to-one communication. A communication system may include number of switches and nodes.

Circuit Switching Technique. For data transmission, a dedicated circuit/path is established between sender and receiver. Telephone/ Telephone Exchange used circuit switching technique. It establishes End-to-End Connection.

Packet Switching Technique. It is a method of transferring data from source to destination. Data is divided into small pieces called Packets of variable length. All packets are individually routed over a network.

24. (b) 98@9998@

25. Constraints in MySQL are used to enforce rules on data stored in a database table and ensure the integrity of the data. The purpose of constraints is to prevent incorrect data from being stored in the table and to ensure that the data stored in the table meets certain conditions, such as unique values, minimum and maximum values, and relationships between tables. Constraints can be used to enforce rules on individual columns or across multiple columns in a table. They are an important part of database design and play a crucial role in maintaining the consistency and accuracy of data in a database.

OR

Aggregate functions in MySQL are used to perform calculations on a set of values and return a single value. These functions include:

SUM: Returns the sum of all values in a specified column.


AVG: Returns the average value of all values in a specified column.

COUNT: Returns the number of rows in a table, or the number of non-NULL values in a specified column.

MIN: Returns the minimum value in a specified column.

MAX: Returns the maximum value in a specified column.

26. (a) ItemName
(b) Degree = 4
Cardinality = 6
(c) INSERT INTO FreshVegetables (ItemCode, ItemName, Scode)VALUES (1007, "Ginger", 15);

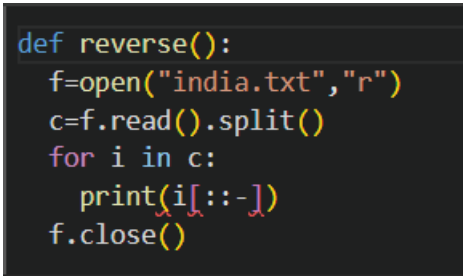27. A screenshot of a code editor with a dark background. The code is written in Python and is intended to read a file named 'india.txt', split its content into lines, reverse the order of the lines, and print them. The code uses a for loop to iterate over the reversed list of lines and prints each line. The file is closed after reading.

```
def reverse():  
    f=open("india.txt","r")  
    c=f.read().split()  
    for i in c:  
        print(i[::-1])  
    f.close()
```

28. (i) select * from workshop where fee is null
(ii) select city, fee from workshop where topic="python"
(iii) Alter table workshop add feedback varchar(100)

29.

```
def Filtter (List1, List2):  
    List1 = [X for X in range (100,125,2)]  
    List2 = [X for X in range (101,125,2)]  
    NewList = [List1]+[List2]  
    return NewList  
OddList = []  
EvenList = []  
Res= Filtter(OddList,EvenList)  
print('Combined nested list \n',Res)
```

30. (a)


```
Movie = []  
# PUSH operation using append()  
def push(Movie, item):  
    Movie.append(item)  
#POP operation  
def pop(Movie):  
    if(Movie):  
        print('Element popped from stack:')  
        print(stack.pop())  
    else:  
        print('Stack is empty')
```

```

(b) Stack = []
    # PUSH operation using append()
    def push(Stack,Num):
        Num= int(input('Enter the Number in Stack'))
        Stack.append(Num)
    #POP operation
    def pop(Stack):
        if(Stack):
            print('Element popped from stack:')
            print(Stack.pop())
        else:
            print('Stack is empty')

```

31. (i) admin; it contains the max number of systems to reduce traffic

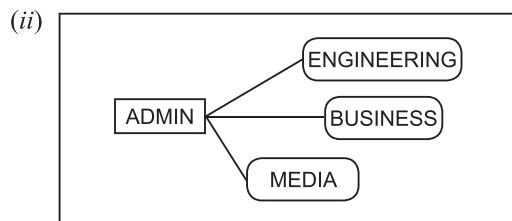

(iii) firewall

(iv) (c) Video Conferencing

(v) POP and SMTP

32. (a) ['and y','u will!']

```

(b) import mysql.connector as pymysql                #statement 1
    dbcon=pymysql.connect (host="localhost", user="root",passwd="sia@1928",
    database=' School')

                                                                    # statement 2

    if dbcon.isconnected() == False:
        print("Error in establishing connection:")
    cur=dbcon.cursor()

                                                                    #statement 3

    query="select * from stmater"
    cur.execute (query)
                                                                    # statement 4
    resultset=cur.fetchmany (3)
    for row in resultset:
        print (row)
                                                                    # statement 5
    dbcon.close()

```

OR

(a) hELL16EeEeryoE

(b) Statement 1: conl.cursor ()

Statement 2: mycursor.execute("select * from student where Marks>75")

Statement 3: mycursor.fetchall ()

```

33. import pickle
def Display_Game():
    file = open('GAME.Dat' , 'rb')
    try:
        while True:
            record = pickle.load(file)
            if record['Age'] in [8,9,10,11,12,13]:
                print(record)
    except EOFError:
        pass
    file.close()
Create_Game()
Display_Game()

```

OR

```

def Display_LapTop():
    file = open(' LAPTOP.DAT.dat' , 'rb')
    try:
        while True:
            record = pickle.load(file)
            MNumber = int(input('Enter the Model number to be serech'))
            if record['ModelNo'] == MNumber
                print(record)
    except EOFError:
        pass
file.close()

```

34. SELECT A.D_ID, A.DNAME,B.DEPARTMENT,A.MOBILE,B.CHARGE FROM DOCTOR A, D_DEPT B WHERE A.D_ID = B.D_ID;

SELECT A.D_ID,A. DEPARTMENT, B.MOBILE, A.CHARGES FROM D_DEPT A, DOCTOR B WHERE A.OPD_DAYS = 'MWF' AND A.D_ID = B.D_ID;

SELECT SUM (A.SALARY), B. DEPARTMENT FROM DOCTOR A, D_DEPT B GROUP BY B.DEPARTMENT;

OR

UPDATE D_DEPT
SET CHARGES = CHARGES*(1+0.01) WHERE DEPARTMENT LIKE 'NEUROLOGY';

35. Statement 1- csv.writer(f)
Statement 2 - cw.writerow(l)
Statement 3 – break
Statement 4 - i[3]>25