

Answers to Practice Papers — 3

1. (d) `select empid where empid = 1009 and Lastname = 'Ramesh';`
2. (c) 60000
3. (b) `POW()`
4. (d) Internet
5. (b) PUSH
6. (a) Math
7. (d) `delete from student;`
8. (b) Candidate Key
9. (b) //
10. (d) Division operator.
11. (ii) ('1', '2', '3', '4')
12. (b) To move the pointer to a specific position in the file
13. (a) To ensure that the file is closed properly after it is used
14. (d) The function is called, the function's statements are executed in order, and then the function returns a value
15. (c) It removes the extra newline character added at the end of the file
16. (a) An error is raised
17. (a) Both A and R true and R is the correct explanation for A.
18. (a) Both A and R true and R is the correct explanation for A.
19. **def** display(a,b):
 if a>b:
 a,b=b,a
 else:
 print(a,b)
x=**input**("Enter")
y=input("Enter")
display(x,y)
print(x,y)
20. A **website** refers to a collection of web pages, images, videos and other digital assets that are hosted on a web server and can be accessed via a web browser using a URL (Uniform Resource Locator). A **web page**, on the other hand, is a single document that can be viewed on the internet through a web browser. A website typically contains multiple web pages that are linked together through hyperlinks.

OR

SMTP (Simple Mail Transfer Protocol) is a protocol used for sending and receiving email messages over the internet. It is the foundation of email communication on the internet.

When an email is sent, it is first delivered to an SMTP server. The SMTP server then forwards the email to the appropriate recipient's mail server using the recipient's email address. The recipient's mail server then delivers the email to the recipient's inbox.

SMTP servers use a set of commands and codes to communicate with each other, such as:

EHLO or HELO: This command is used to introduce the sending server to the receiving server.

MAIL FROM: This command is used to specify the sender's email address.

RCPT TO: This command is used to specify the recipient's email address.

DATA: This command is used to begin the process of sending the actual email message.

QUIT: This command is used to end the communication between the servers.

SMTP is a simple but effective protocol and it's widely used today.

21. A tuple is an ordered set of immutable heterogeneous elements. In Python a tuple can be created by putting the comma-separated elements of the tuple in parentheses(). For example, suppose we want to represent the following elements of a book with code: 1021, title 'Programming in Python', binding type 'Hard Bound', and edition 2018: As a tuple it is written as: (1021,'Programming in Python', 'Hard Bound', 2018). Usually a tuple is assigned to a variable name and then that variable name represents the tuple.

22.	Delete	Drop
	• It is a DML Command.	• It is a DDL Command.
	• It is used to remove record(s) from the relation.	• It is used to remove the records along with table Structure.
	• Delete from <table name>	• Drop table <table name>

23. (a) (i) **VOIP**: Voice Over Internet Protocol
(ii) **POP**: Post Office Protocol
(b) Gateway

24. CLSS-xIi pYtHoN

OR

- (a) SOUTHNORTH
Maximum value of N = 3
Minimum value of N = 1

25. **Data Definition Language (DDL)**: This is a category of SQL commands. All the commands which are used to create destroy or restructure databases and tables come under this category. Examples of DDL commands are - CREATE, DROP, ALTER.

Data Manipulation Language (DML): This is a category of SQL commands. All the commands which are used to manipulate data within tables come under this category. Examples of DML commands are - INSERT, UPDATE, DELETE.

OR

Insert: This is a DML command used to insert/add a new record at the end of the table.

Syntax: Insert into table name (column 1, column 2...column N) values (value 1, value 2...value N)

Update: This DML command is used to modify/edit data or records of the table

Syntax: update table name set column 1 = value 1, column 2, value 2, where, condition ;

26. (a)

item_id	stock_id	quantity	item_name	item_description	item_price
4	4	20	Lehenga	Embroidered Lehenga from Gujarat	10000.00

- (b) (i)

age
20
22
25
30
35

- (ii)

```
mysql> select name from students where name not like '%a%';
```

name
John

(iii)

```
mysql> select avg(age) from students where age>=25;
+-----+
| avg(age) |
+-----+
| 30.0000 |
+-----+
```

(iv)

```
mysql> select * from students where age not in(25,35);
+-----+-----+-----+-----+
| student_id | name | age | address |
+-----+-----+-----+-----+
| 1 | John | 20 | 123 Punjabi Bagh |
| 2 | Jane | 22 | 456 Rajouri |
| 4 | Mita | 30 | 111 Paschim Vihar |
+-----+-----+-----+-----+
```

27. def countword():
 f=open("quotes.txt","r")
 count=0
 new=""
 x=f.read()
 word=x.split()
 for x1 in word:
 new += x1
 if len(x1)==4:
 count=count+1
 print("Total words ",count)
 f.close()

OR

```
def count():  

  f=open("story.txt","r")  

  s=f.read()  

  word=s.split()  

  c=0  

  for i in word:  

    if i=="India":  

      c=c+1  

  print ("Total word :",c)
```

28. (i)

COUNT(*)	DCODE
2	D01
2	D05

(ii)

NAME	DEPARTMENT
GEORGE K	INFRASTRUCTURE
RYMA SEN	MEDIA

(iii)

MAX (DOJ)	MIN (DOB)
2019-12-09	1984-10-19

OR

(i)

title
Dangal
PK
Baahubali: The Beginning
Padmaavat
Sanju

(ii)

title	name
PK	Deepika Padukone
Padmaavat	Kajol

(iii)

is_3D	count(*)
0	8
1	1


29.

```
def list_squared(L):
    squared_list = []
    for i in L:
        squared_list.append((i, i**2))
    return squared_list
```

Example usage:
my_list = [1, 2, 3, 4]
print(list_squared(my_list)) # Output: [(1, 1), (2, 4), (3, 9), (4, 16)]

30.

```
def push(Store):
    a=input("Enter any number :")
    Store.append(a)
def pop(Store):
    if (Store==[]):
        print ("Stack Empty")
    else:
        print ("Deleted element is : ",Store.pop())
```

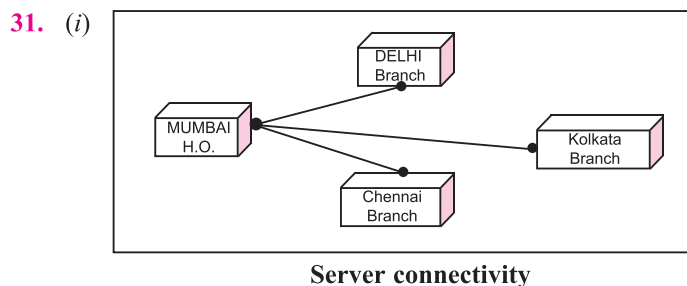

Server connectivity

(ii) MUMBAI H.O.

(iv) (a) Optical Fibre

(iii) (a) WAN

(v) (b) Dynamic website

32. (a) 3%6%
(b) Statement 1 : Connect ()
Statement 2 : con1.cursor()
Statement 3 : mycursor.execute(querry)

OR

- (a) 10 *3 *
10 #3 #12 #5 #
10 @3 @12 @
(b) Statement 1 : con1.cursor()
Statement 2 : mycursor.execute(“Select * from product where PName Like ‘%’ + startsWith +” ’) ”
Statement 3 : mycursor.fetchall()

33. import pickle
def showfile():
 count = 0
 with open("SPEED.DAT", "rb") as f:
 while True:
 try:
 vehicle = pickle.load(f)
 except EOFError:
 break
 print("Vehicle Type:", vehicle[0], "No. of Wheels:", vehicle[1])
 count += 1
 print("Number of records:", count)

OR

```
import pickle
def display_above_75():
    with open("Student.dat", "rb") as f:
        while True:
            try:
                student = pickle.load(f)
            except EOFError:
                break
            if student[2] > 75:
                print("Admission Number:", student[0], "Name:", student[1], "Percentage:", student[2])
```

34. (i) Select admno,name,class from student where gender='M';
(ii) Select * from student where name like 'S%';
(iii) Select * from student where fee is NULL;

OR

(iii) Select name from student where adm_date is between '2017-01-01' and '2017-12-31';

35. (a) Line 1 :import csv
(b) Line 2 :f=open(stud.csv,'a')
(c) Line 3 :readerObj=csv.reader(fobj)
(d) Line 4: Not mandatory, as we have opened the file using “with” operator, it closes automatically.