

Answers to Practice Papers — 6

1. (c) Desc, (Note: By default table is ordered by Ascending order)

2. (c) MID

3. (c) Database

4. (b) URL

5. (a) LAN

6. (d) Frame

7. (d) exit;

8. (a) Degree

9. (c) Operators

10. (b) Tuple

11. (c) Qty is NULL

12. (a) append

13. (c) 3

14. (b) Delhi, Mumbai, Chennai, Kolkata

15. (a) ERROR

16. (a) To read and write data to the file

17. Both A and R true and R is the correct explanation for A.

18. (d)

19. Y=int(input('Enter 1 or 10'))

if Y==10:

for Y in range(1,11):

print(Y)

else:

for m in range(5,0,-1):

print('thank you')

20. Differences:

Co-axial Cable	Optical Fiber
● Coaxial Cable is used to transmit the signal/data is in electrical form.	● Optical fiber is used to transmit the signal/data is in light form.
● It is made of Plastics, copper wires etc.	● It is made of plastics and glasses.
● Installation and implementation is easy.	● Installation and implementation is difficult.
● Uses- ◦ Cable TV signals ◦ Internet ◦ Telephone connections	● Uses- ◦ HDTV's ◦ Aircraft ◦ Medical field ◦ Telephone connections

OR

- (i) Use antivirus, anti malware on regular basis.
- (ii) Enforcing firewall protection in the network.

21. (a) 4

(b) -2

22. In Relational Database Management Systems (RDBMS), the concept of a "domain" refers to the set of possible values that a specific attribute (i.e. a column) in a database can take. A domain defines the data type, constraints, and other characteristics of the attribute.

For example, if you have a column named age in a table, you might define the domain for that column as being INT (integer), with a constraint that the value must be between 0 and 120. This means that any value entered into the age column must be an integer and must be within the specified range.

23. (a) HTTPS : Hypertext Transfer Protocol Secure

POP – Post Office Protocol

(b) Communication media in networking refers to the physical or wireless transmission channels used to transmit data between devices. Examples include twisted-pair cables.

24. iNdiA*****

OR

EA3n

25. An equi-join in a Relational Database Management System (RDBMS) is a type of join operation that combines rows from two or more tables based on matching values in specified columns. In an equi-join, the join condition specifies that only the rows with equal values in the specified columns are returned as the result. An equi-join is also known as an inner join or simple join.

OR

In the context of a relational database management system (RDBMS), the Cartesian product refers to the result of an SQL query that performs a join operation on two or more tables without any condition specified in the join clause. This will result in a table where each row is a combination of every possible pair of rows from the input tables, with duplicates allowed.

For example, if two tables A and B each have three rows, the Cartesian product of the two tables will have 9 rows (3×3). However, in most cases, this is not the desired outcome, and a more appropriate join condition should be specified to limit the number of rows in the result set.

26. (a) SELECT * FROM Bank_Account NATURAL JOIN Branch;

ACode	Name	Type	City
A01	Aimrita	Savings	Delhi
A02	Aimrita	Savings	Nagpur
A03	Parthodas	Current	Mumbai

Degree 4

Cardinality 3

Cartesian Product Degree 5

Cardinality 9

```

(b) (i) +-----+
        | TID |
        +-----+
        | 101 |
        | NULL |
        | 102 |
        | 104 |
        | 101 |
        | 103 |
        +-----+

(ii) +-----+-----+-----+
     | TID | sum(fees) | MIN(FEES) |
     +-----+-----+-----+
     | 102 | 10000 | 10000 |
     | 104 | 9000 | 9000 |
     | 103 | 16000 | 16000 |
     +-----+-----+-----+

(iii) +-----+
      | CNAME |
      +-----+
      | Digital Marketing |
      +-----+

(iv) +-----+
     | MAX(FEES) |
     +-----+
     | 16000 |
     +-----+

```

27.

```

def co():
    F=open("story.txt","r")
    c=F.read()
    a=c.split()
    hecount=0
    shecount=0
    for i in a:
        if i=="he":
            hecount=hecount+1
        if i=="she":
            shecount=shecount+1
    print(hecount)
    print(shecount)
    F.close()

```

OR

```
def co(b):
    F=open("story.txt","r")
    c=F.read()
    a=c.split()
    count=0
    for i in a:
        if i==b:
            print("it exists in file")
            count=count+1
        else:
            print("does not exist in file")
    print(count)
    F.close()
    b=input('enter the word to searched')
```

28. (a) Question should be select student.Sname from student, stream where student.S_ID = Stream.S_ID and Stream.Stream_Name like 'Commerce%'

output

KRISHNA

FARDEEN

KRITIKA

SALMA

AMANDEEP

TEJAS

(b) COUNT MAX

10 2750

(c) MAX MIN

2650 2600

29.

```
def arrangelements(X):
    pos=[]
    neg=[]
    for i in X:
        if i>0:
            pos.append(i)
            pos.sort()
        elif i<0:
            neg.append(i)
    print(neg+pos)
X=[-2,3,4,-5,7]
arrangelements(X)
```

```
[-2, -5, 3, 4, 7]
```

```

30. def PushElement(ST,Doc):
    for i in Doc:
        if i[3]=="Anesthesia":
            ST.append([i[0],i[1]])
def Pop_Element(ST):
    while ST:
        print(ST.pop())
else:
    print("Empty Stack")

```


OR

```

def push(KItem):
    s=c=0
    for i in KItem:
        if KItem[i]<100:
            s=s+KItem[i]
            c=c+1
            st.append(i)
    return (s/c)
#Calling (Optional)
d={"Spoons":116,"Knife":50,"Plates":180,"Glass":60}
st=[]
print(push(d))
print(st)

```

31. (a) Administrative five office as it has maximum number of computers ie 120. Hence increases connectivity efficiency.

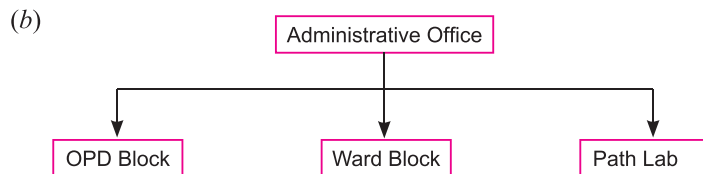

32. (a)

```

x is 50
Changed global+local x to 20

```

(b) statement 1 -> mycursor=conn.cursor()

Statement 2 -> mycursor.execute(sql)

Statement 3 -> conn.commit()

(c) Statement 1- mycursor=conn.cursor()

Statement 2- mycursor.execute("Select * from emp where salary>25000")

Statement 3- mycursor.fetchall()

OR

(a) iNdiA%*****

```

33. import pickle
def Create_Member():
    MData = { }
    while True:
        file2 = open('Member.Dat' , 'ab')
        MCode = int(input('Enter the Member Code: '))
        Mname = input('Enter name: ')
        Fee = int(input('Enter the Fee'))
        Type = input('Enter Type: ')
        MData ['MCode'] = MCode
        MData ['Mname'] = Mname
        MData ['Fee'] = Fee
        MData['Type'] = Type
        Ans = input('Any More record')
        if Ans in'nN':
            break
    pickle.dump (MData ,file2)
def Display_Member():
    file = open('Member.Dat' , 'rb')
    try:
        while True:
            record = pickle.load(file)
            res=sum(record['Fee'])
            print(res)
    except EOFError:
        pass
    file.close()
    Create_Member()
    Display_Member()

```

OR

Same as above

Change the variables and in display function use max function

```

34. In Question in customer table SetNo should be SetCode
Select A. CustNo, A.CustAddress,B.SetName from A CUSTOMER, B HANDSETS wher A.SetCode =B.SetCode
Select * from Customer, HandSet where Handset.SetName like 'Nokia%';
use handsets;
modify structure ADD ( GST, numaric (6,2);
select sum(PhoneCost) from handset group by touchscreen;

35. import csv
newline=''
f.close()
Reader(NF)

```