

Answers to Practice Papers — 7

1. False
2. (c)

```
SELECT name
FROM instructor1
WHERE salary BETWEEN 90000 AND 100000;
```
3. (d) ORDER BY
4. (c) Hypertext transfer protocol
5. (b) Protocol
6. (b) Update
7. (d) Cardinality
8. (a) 6
9. (b) ['abc', 50]
10. (b) +=
11. (c) XML
12. (a) Degree 7, Cardinality 5
13. (a) 3
14. (a) Positional parameters are passed to the function in the order they are defined, while keyword parameters are passed using the parameter name
15. (a) `file.close()`
16. (a) `pop`
17. (a) Both A and R true and R is the correct explanation for A.
18. (c) A is True but R is False.
19.

```
def chksum():
    x=int(input("enter number"))
    if x%2==0:
        for i in range(2*x):
            print(i)
    else:
        print("#")
```
20. 192.168.100.05 → IP Address
AB.AD.2F.D1.24.15 → MAC Address

OR

- (i) **HTTPs:** Hypertext Transfer Protocol Secure
- (ii) **SMTP:** Simple Mail Transfer Protocol
- (iii) **SCP:** Session Control Protocol
- (iv) **POP:** Post Office Protocol.

21. Between clause is used to filter the record by providing the range. The values can be numbers, text, or dates. The BETWEEN operator is inclusive: begin and end values are included.

For example, SELECT * FROM Employee WHERE Salary BETWEEN 3000 AND 5000

22. A primary key, also called a primary keyword, is a column in a relational database table that's distinctive for each record. It's a unique identifier, such as a driver's license number, telephone number with area code or vehicle identification number (VIN). A relational database must have only one primary key. Every row of data must have a primary key value and none of the rows can be null.

Example:

Primary Key ID	Name	Course
2041	Tom	Java
2204	John	C++
2043	Alice	Python
2032	Bob	Oracle

23. (a) (i) Global System for Mobile Communication
(ii) Extensible Markup Language
(b) Modem is a device that modulates or demodulates the signal. It acts as a bridge between the internet/telephone line and the computer. Modulate converts the analog signal to digital. Demodulation converts the digital signal to analog.
24. 1 20 P\$
4 30 P\$R\$
9 60 P\$R\$S\$

OR

tOGETHER@COM@

25. WHERE Clause	HAVING Clause
The WHERE Clause is used to filter the table's records according to the given criteria.	Records from groups are filtered using the HAVING clause according to the given criteria.
WHERE Clause may be used in place of the GROUP BY Clause.	Without the GROUP BY Clause, you cannot utilise the HAVING Clause.
Implements the WHERE clause in row operations	Implements the HAVING Clause in Column Operation
WHERE Aggregate functions are not permitted in clauses.	Agg function may be included in the HAVING Clause.
SELECT, UPDATE, and DELETE statements all support the usage of WHERE Clause.	Only the SELECT statement and the HAVING Clause are compatible.
Before the GROUP BY clause, the WHERE clause is used.	Following the GROUP BY Clause comes the HAVING Clause.
When using single row functions like UPPER, LOWER, etc., the WHERE clause is needed.	With multiple row functions like SUM, COUNT, etc., the HAVING Clause is utilised.

OR

The term "degree" in SQL refers to the quantity of columns or attributes in a relation or table. It is a representation of the table's horizontal size. A table, for instance, has a degree of three if it has three properties.

In SQL, the term "cardinality" describes the quantity of tuples or rows in a relation or table. It reflects the table's vertical size. A table has a cardinality of five, for instance, if it has five rows.

Employee_id	Employee_name	Department
101	Ravi Kumar	Sales
102	Tarun A	IT
103	Jennifer Davis	HR
104	Martin Woods	HR
105	Ron Romy	IT

In the above table

Degree = 3

Cardinality = 5

26. (i) Alter table bank add primary key(AccNo)

(ii) cardinality-10

degree-6

(iii) desc bank

27.

```
f=open("mynotes.txt","r")
c=f.readlines()
for i in c:
    if i[0]=="K":
        print(i)
f.close()
```

28. (i) Select avg(charges) from hospital Group by Department

(ii) update hospital set age=26 where PNo=7

(iii) Select * from hospital where sex="F" and DateOfAdm like "%2018"

29.

```
def arrangelements(x):
    pos=[]
    neg=[]
    for i in x:
        if i>0:
            pos.append(i)
            pos.sort()
        elif i<0:
            neg.append(i)
    print(neg+pos)
x=[-2,3,4,-5,7]
arrangelements(x)


[-2, -5, 3, 4, 7]
```

30.

```
m=['Transformers','Rowdy Rathore','Sooryavansham']
def push():
    while True:
        movie=input("enter movie name")
        m.append(movie)
        c=input("wish to continue: ")
        if c=='n':
            break
    print(m)
def pop():
    if m==[]:
        print("underflow")
    else:
        print(m.pop())
        print(m)
print("choose the operation 1. Push 2. Pop")
x=int(input("enter choice: "))
if x==1:
    push()
if x==2:
    pop()

choose the operation 1. Push 2. Pop
enter choice: 2
Sooryavansham
['Transformers', 'Rowdy Rathore']
```

31. (a)

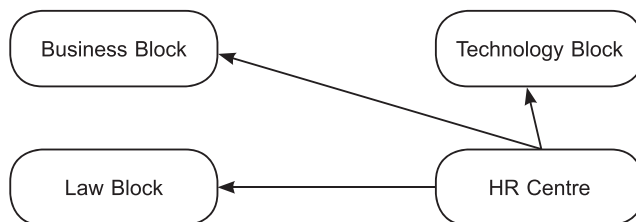

(b) Hr Centre, because it consists of the maximum number of computers to house the server.

(c) Switch/Hub should be placed in each of the blocks

(d) WAN, as the given distance is more than the range of LAN and MAN.

(e) BUS

32. (a) Line 1: CSV

(b) Line 2: "a"

(c) Line 3: reader()

(d) Line 4: close()

(e) Line 5: Arjun 123@456

Arunima aru@nima

Frieda myname@FRD

OR

(a) a

(b) CSV.Writer(csvf)

(c) CW.writerow(['Title', 'Author', 'Price'])

(d) CSV.reader(csvf)

(e) r[o][o]=="R"

```

33. def Search():
    n=int(input("Enter Laptop number to be search"))
    flag=0
    try:
        f=open("laptop.dat","rb")
        while True:
            s=pickle.load(f)
            if s[0]==n:
                print("Record found!!!")
                print(s)
                flag=1
    except:
        f.close()
    if flag==0:
        print("Record not found")

```

OR

```

import csv
try:
    with open("laps.csv") as file:
        cr = csv.reader(file)
        for i in cr:
            if int(i[-1])<=17:
                print(i)
except:
    print("Issue in the file! Make sure the file exists, and contains proper data!")

```

34. (i) count * from workshop where gender="F"
 (ii) select * from workshop where fee is null
 (iii) select city, fee from workshop where topic="python"

OR

Alter table workshop add feedback varchar(100)

35. (a) (ii) Statement 12
 (b) (i) Statement 6
 (c) (iv) Statement 9
 (d) (iii) hELLO pYtHON