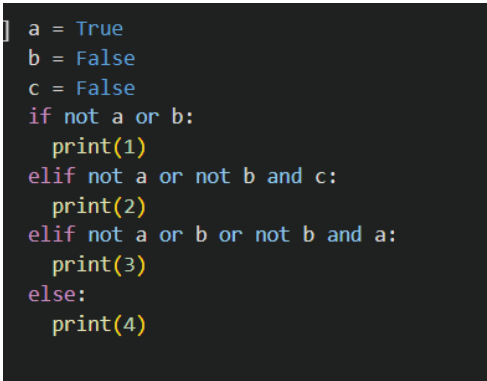


Answers to Practice Papers — 8

1. (b) Application software
2. (a) 55
3. (b) Top
4. (a) append
5. (a) Personal area network
6. (b) Cardinality
7. (c) Attribute
8. (b) Error
9. (a) 5 5
10. (b) push
11. (b) To move the pointer to a specific position in the file
12. (a) Variables that are passed to the function when it is called
13. (b) It writes data to a binary file
14. (a) [1, 2, 3]
15. (a) True
16. (a) 0 1 2 3
17. (b) Both A and R true and R is not the correct explanation for A.
18. (b) Both A and R true and R is not the correct explanation for A.

19. 

```
] a = True
  b = False
  c = False
  if not a or b:
      print(1)
  elif not a or not b and c:
      print(2)
  elif not a or b or not b and a:
      print(3)
  else:
      print(4)
```

20. (i) Remote login is the ability to access data stored on a computer from a remote location.
(ii) Conversion of the domain name of each web server to its corresponding IP address is called domain name resolution.

OR

- (i) Repeater
(ii) LAN

- 21. Local variables** are those variables that are declared inside the function. A user can only access a local variable inside the function but never outside it.

Variables that are created outside of a function are known as **global variables**. It can be used by everyone, both inside of functions and outside. A global variable can be accessed globally in its entire program.

OR

Recursion	Iterations
- Recursion occurs when a statement in a function calls itself repeatedly. - Recursion uses more memory in comparison to iteration. - Recursion reduces the size of the code.	- The iteration occurs when a loop repeatedly executes a set of instructions until the controlling condition becomes false. - Iteration uses less memory in comparison to recursion. - Iteration increases the size of the code.

- 22.** (i) DDL Command
(ii) DML Command
- 23.** (i) IOT – Internet of Things
(ii) Media Access Control
(iii) Transmission Control Protocol
(iv) Voice Over Internet Protocol

- 24.** Output:

111101

OR

Output:

INiAIId esSb

- 25.** In MySQL, the ORDER BY clause is used to sort the result set of a query in ascending or descending order based on one or more columns. The ORDER BY clause is used at the end of a SELECT statement and can be used to sort the data in ascending order (default) or descending order (using the DESC keyword).

Here's an example to demonstrate the usage of ORDER BY:

Select * from Users ORDER BY Name;

#by default ascending order(asc)

Select * from Users ORDER BY Name desc;

Descending Order

- 26.** (a)
- | student_id | name | dob | gender | address | marks_id | subject | marks |
|------------|--------|------------|--------|-----------|----------|-----------|-------|
| 1 | Rohit | 1996-05-01 | M | Delhi | 1 | math | 85 |
| 2 | Sonia | 1998-03-12 | F | Mumbai | 2 | science | 90 |
| 3 | Vikas | 1997-02-25 | M | Chennai | 3 | history | 80 |
| 4 | Anjali | 1995-04-17 | F | Kolkata | 4 | english | 95 |
| 5 | Amit | 1999-06-30 | M | Hyderabad | 5 | geography | 88 |

(b)

```
mysql> select title,budget from movies where rating>7.0 and rating <8.5;
+-----+-----+
| title          | budget |
+-----+-----+
| PK             | 90.00  |
| Baahubali: The Beginning | 180.00 |
| Padmaavat      | 180.00 |
| Sanju          | 100.00 |
| Bajrangi Bhaijaan | 90.00  |
| Secret Superstar | 15.00  |
+-----+-----+
6 rows in set (0.03 sec)

mysql> select max(budget), is_3d from movies group by is_3d;
+-----+-----+
| max(budget) | is_3d |
+-----+-----+
| 180.00      | 0     |
| 180.00      | 1     |
+-----+-----+
2 rows in set (0.04 sec)

mysql> select max(release_date),min(duration) from movies;
+-----+-----+
| max(release_date) | min(duration) |
+-----+-----+
| 2018-06-29       | 02:27:00     |
+-----+-----+
1 row in set (0.03 sec)

mysql> select title from movies where release_date like '2015%';
+-----+
| title          |
+-----+
| Baahubali: The Beginning |
| Bajrangi Bhaijaan       |
+-----+
2 rows in set (0.00 sec)
```

```
27. def count_blank_spaces():
    with open("STORY.txt", 'r') as f:
        text = f.read()
        words = text.split()
        count = len(words) - 1
        print("Total number of blank spaces are:", count)
```

OR

```
def display_words():
    with open("POEM.txt", "r") as file:
        line = file.read()
        words = line.split()
        for word in words:
            if len(word) < 4:
                print(word)
```

28. 101 115
 102 65
 103 107
 NULL

OR

Lanka Varanasi

Luxa Varanasi

Bansphatak Varanasi

29. removing duplicate elements


```
def Removedup(lst):
    fi = []
    du= []
    for i in lst:
        if i not in fi:
            fi.append(i)
    return fi
lst = [2,5,6,7,2,5,23,45,6]
print(Removedup(lst))

[2, 5, 6, 7, 23, 45]
```

- 30.

```
def trans():
    f1=open("india.txt","r")
    f2=open("duplicate.txt","w")
    c=f1.read().split()
    for i in c:
        if c.isupper():
            f2.write(i)
    f1.close()
    f2.close()
```

31. (i)

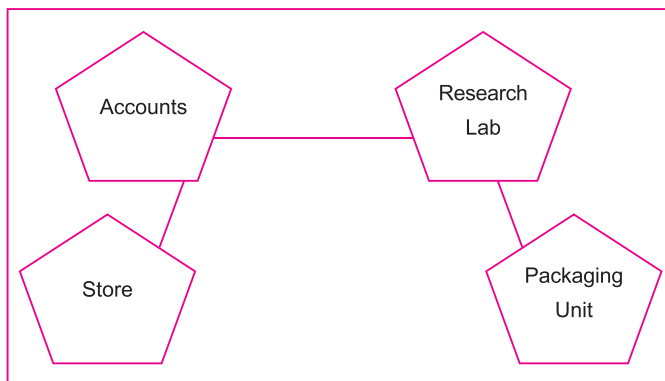

- (ii) The most suitable place/building to house the server of this organization would be building Research Lab, as this building contains the maximum number of computer.
- (iii) Since the cabling distance between. Accounts to store is quite large, so a repeater would ideally be needed along their path to avoid loss of signals during the course of data flow in this route.
- (iv) Firewall
- (v) Hub/switch each would be needed in all the building to interconnect the group of cables from the different computers in each building.
32. (a) Outside of the functions, the value of x is: 10
 Inside the function, the value of x is: 10
 Inside the function, the value of x has been changed to: 20
 Outside of the functions, the value of x has been changed to: 20
- (b) **Statement 1** `mycursor=conn.cursor()`
Statement 2 `mycursor.execute(sql)`
Statement 3 `conn.commit()`

OR

(b) **Statement 1** mycursor=conn.cursor()

Statement 2 mycursor.execute("select * from EMP where salary>25000")

Statement 3 resultset=mycursor.fetchall()

33. import pickle

```
def max_salary():
    f = open("Member.dat", "rb")
    max_salary = 0
    while True:
        try:
            data = pickle.load(f)
            if data[2] > max_salary:
                max_salary = data[2]
        except EOFError:
            break
    print("Max salary is", max_salary)
    f.close()
max_salary()
```

OR

```
import pickle
def search_mobile():
    f = open("mobile.dat", "rb")
    while True:
        try:
            data = pickle.load(f)
            if data[1] > 1000:
                print(data)
        except EOFError:
            break
    f.close()
search_mobile()
```

34. (i) Rollno

(ii) Degree of the table -5

(iii) (a) Insert into Fees values(1201,"Akshay","12th",350,2);

(b) Updates Fees set Fee=Fee+50 Where Class="12th" AND Qtr=2;

OR

(a) Delete from Fees Where Rollno=1212;

(b) (b) ALTER

35. (a) f=open("myfile.txt", "w")

(b) f.writelines(newdata)

(c) newstr=f.read()

(d) if i[3]>25