

OctoAssist

User Guide

How to use the OctoAssist ITSM platform

Third Octopus

<https://octoassist.thirdoctopus.com>

Version 1.0 · May 2026

Private & Confidential

Contents

Right-click and Update Field after opening in Word to refresh page numbers.

1. About This Guide

This is a how-to guide for the people who use OctoAssist every day.

If you raise tickets, sign in to the requester portal and read Section 8. If you work the helpdesk queue, start at Section 4 and work through Section 7. If you administer the platform, read Sections 2, 5 and 9 to configure SLAs, the CAB and the mail provider.

1.1 What you can do in OctoAssist

- Raise and resolve incidents and service requests
- Submit and approve changes through the Change Advisory Board
- Track Windows endpoints, push software, schedule patches
- Read and write Knowledge Base articles
- Pull live KPIs and download 25+ CSV reports for audit evidence

1.2 Where the platform is hosted

Item	Value
URL	https://octoassist.thirdoctopus.com
Sign-in	Microsoft Entra ID single sign-on, with local-password fallback
Tenant	Tema IT Team
Endpoints enrolled	43 Windows endpoints (live count)
Users provisioned	399 (admin / agent / requester roles)
Mail	Microsoft Graph — sender helpdesk@temaindia.com

1.3 Who can do what

Role	Can do	Cannot do
Administrator	Everything — Settings, users, SSO, mail provider, SLAs, holidays, CAB, asset groups, software catalog.	Nothing restricted.
Agent	Triage and resolve any ticket. Approve / reject changes if a CAB member. Trigger remote actions. Deploy software.	Cannot edit Settings or provision users.

Role	Can do	Cannot do
Requester	Raise tickets, comment on own tickets, search the Knowledge Base.	Cannot see other people's tickets or Assets / Patches / Software / Settings.

2. Sign In

Open <https://octoassist.thirdoctopus.com/login> in any modern browser (Chrome, Edge, Firefox, Safari).

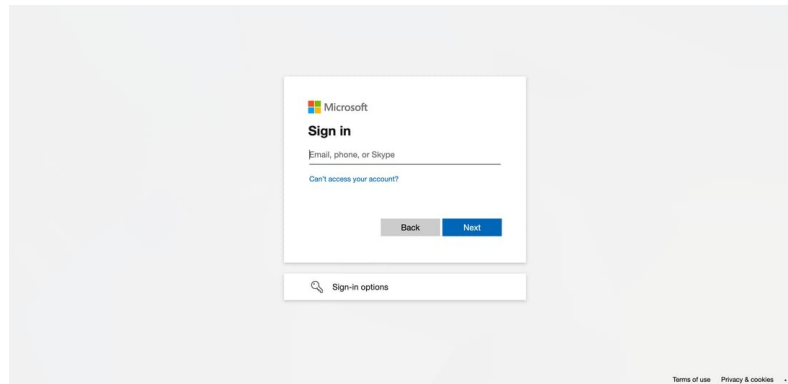


Figure 1 — Sign-in page.

2.1 Two ways to sign in

1. Click Sign in with Microsoft Entra ID (Temaindia.com) — recommended for everyone. Use your work email.
2. Or enter the local email + password supplied by your administrator (used when SSO is unavailable).

Note: When you sign in by SSO for the first time, OctoAssist auto-creates your user record with the role assigned by the administrator. Subsequent sign-ins are silent.

3. Your Home Screen — Tickets

After signing in as an agent or administrator, you land on the Tickets page.

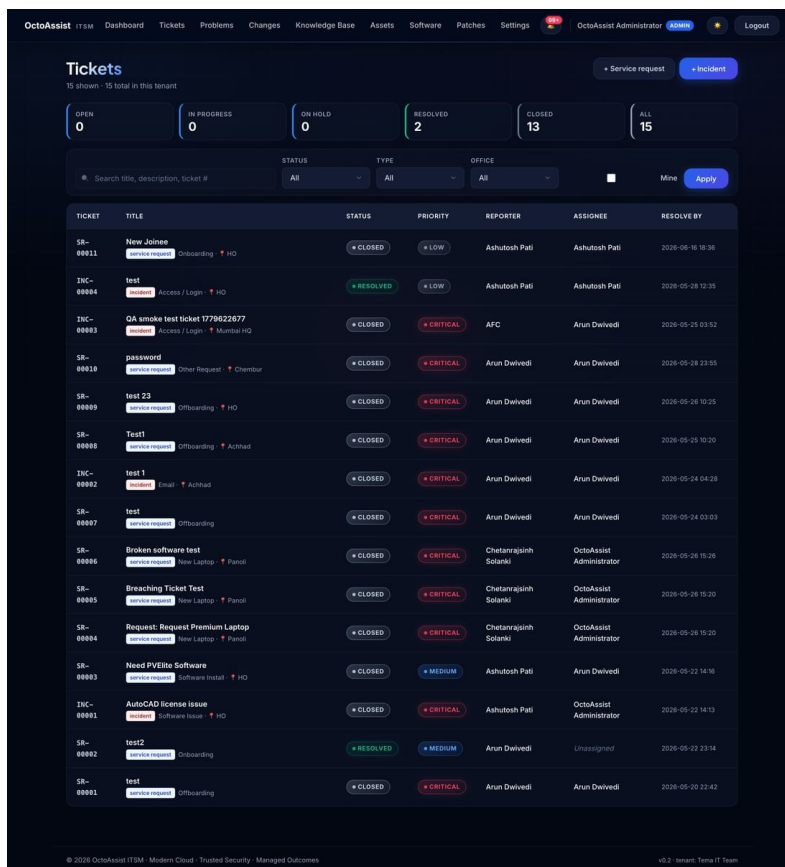


Figure 2 — Tickets list with saved filters and priority colour coding.

3.1 Reading the list

Column	Meaning	Notes
Ticket	Auto-generated number	INC-xxx for incidents, SR-xxx for service requests.
Title	What the requester typed	Plus a small category pill.
Status	Open / In Progress / On Hold / Resolved / Closed	Coloured pill.
Priority	Low / Medium / High / Critical	Red, amber, blue, grey — easy to scan.
Reporter	Who raised the ticket	Linked to the user record.
Assignee	Who is working on it	Or Unassigned (filter chip).
Resolve by	When it must be resolved	Auto-calculated from the SLA matrix.

3.2 Filters and search

- Saved filter chips at the top — Open · In Progress · On Hold · Resolved · Closed · All. Click any to narrow the list.
- Type in the search box to filter by title, ticket number or reporter name.
- Tick the Mine box to show only tickets where you are the assignee.

4. Raise a Ticket — Agent Form

Use this form when you are filing a ticket on behalf of a user or recording one you took over the phone.

Figure 3 — New-ticket form (agent side).

4.1 Step by step

1. Click + Incident or + Service request in the top-right of the Tickets page.
2. Type a clear one-line Title (the user's exact words help when they search later).
3. Pick the Category — this drives the SLA the ticket will be measured against.
4. Pick the Priority based on impact (Low / Medium / High / Critical).
5. Pick the Reporter from the directory dropdown.
6. Set the Location (Mumbai HQ / Chembur / Vadodara / ...) — drives location-based assignment.
7. Write a Description with what's happening, what was expected, any error messages.
8. Attach screenshots or log files if helpful (drag-drop, up to 25 MB each).
9. Click Submit. The reporter, assignee and CAB members are emailed instantly.

5. Work a Ticket

Click any ticket on the Tickets page to open the detail view. Here you triage, comment, change status and resolve.

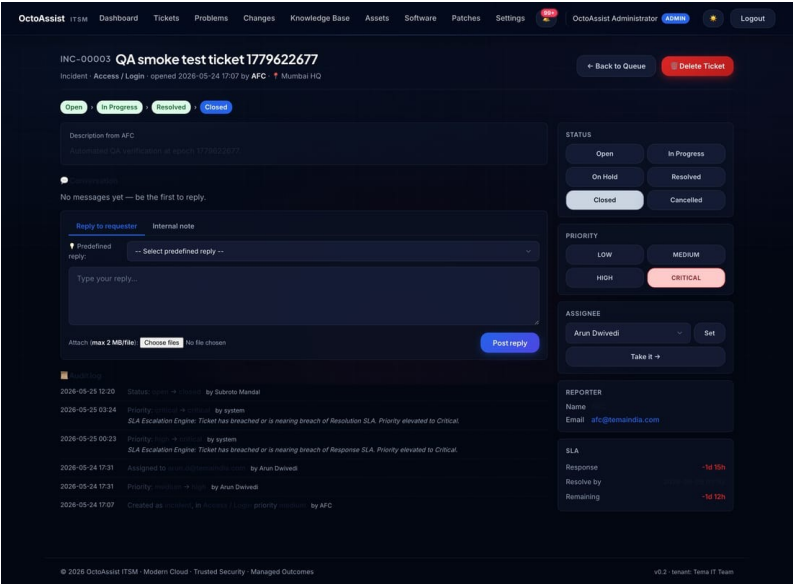


Figure 4 — Ticket detail with status controls and activity timeline.

5.1 Five things you can do on this page

#	Action	How
1	Change status	Use the status pills on the right: Open → In Progress → On Hold → Resolved → Closed.
2	Change priority	Click the Priority pill and pick a new value.
3	Reassign	Pick another agent from the Assignee dropdown. Both old and new assignees get email.
4	Add a comment	Type in the box at the bottom. Tick Internal note if it should NOT be visible to the requester.
5	Insert a reply	Pick from the Predefined replies dropdown — saves typing for common responses.

5.2 When to use Internal note vs Public comment

- Public comment — emailed to the requester. Use this for status updates, requests for more information, resolution explanations.
- Internal note — visible only to other staff. Use for technician hand-offs, troubleshooting notes, vendor-ticket references.

5.3 SLA breach risk

OctoAssist polls every five minutes for tickets within four hours of breach. They surface as SLA breach risk (<4h) in the notification bell and on your Tickets list with an amber chip. Breached tickets show a red chip and are included in the daily SLA report.

5.4 Email notifications fired by ticket events

Event	Recipients	Subject
Ticket created	Reporter + assignee (if set) + every CAB member	[OctoAssist] T-xxxx — created
Ticket assigned	Reporter + new assignee	[OctoAssist] T-xxxx — Assigned to Technician
Status changed	Reporter	[OctoAssist] T-xxxx — Status Updated to ...
Priority changed	Reporter	[OctoAssist] T-xxxx — Priority Updated to ...
Public comment	Reporter and assignee (not the author)	[OctoAssist] T-xxxx — New comment posted

6. Submit and Approve Changes

Every infrastructure change with the potential to impact production goes through the Change module.

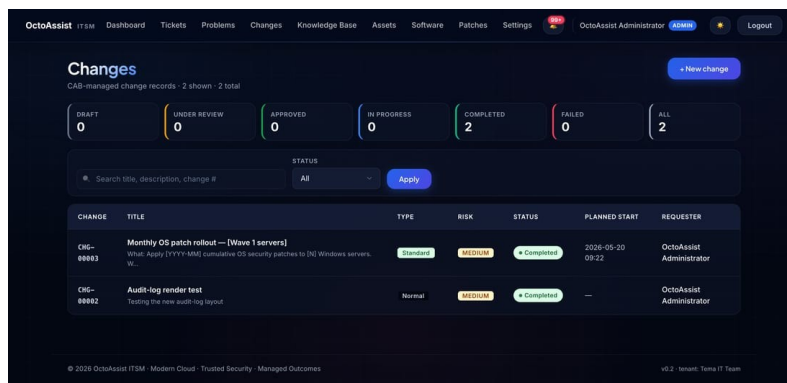


Figure 5 — Changes list.

6.1 Submit a change

1. Open Changes → + New change.
2. Fill Title, Type (Standard / Normal / Emergency), Risk and target completion date.
3. Paste your runbook steps into Implementation plan.
4. Paste your roll-back steps into Rollback plan — this field is required.
5. Tick Linked tickets to attach any incidents this change addresses.
6. Click Submit. Each CAB member receives email with one-click Approve / Reject.

6.2 Approve or reject as a CAB member

1. Open the email and click Open in OctoAssist.
2. Read the implementation and rollback plans.
3. Click Approve or Reject. Add a comment explaining the decision.
4. Once quorum is reached, the change advances to Approved automatically.

6.3 The seven-state change lifecycle

Draft → Pre-CAB → Under Review → Approved → Scheduled → In Progress → Completed. Every transition is timestamped with the actor.

7. Patches, Assets and Software

7.1 See patch posture

Open Patches to see Windows-Update posture for every endpoint.

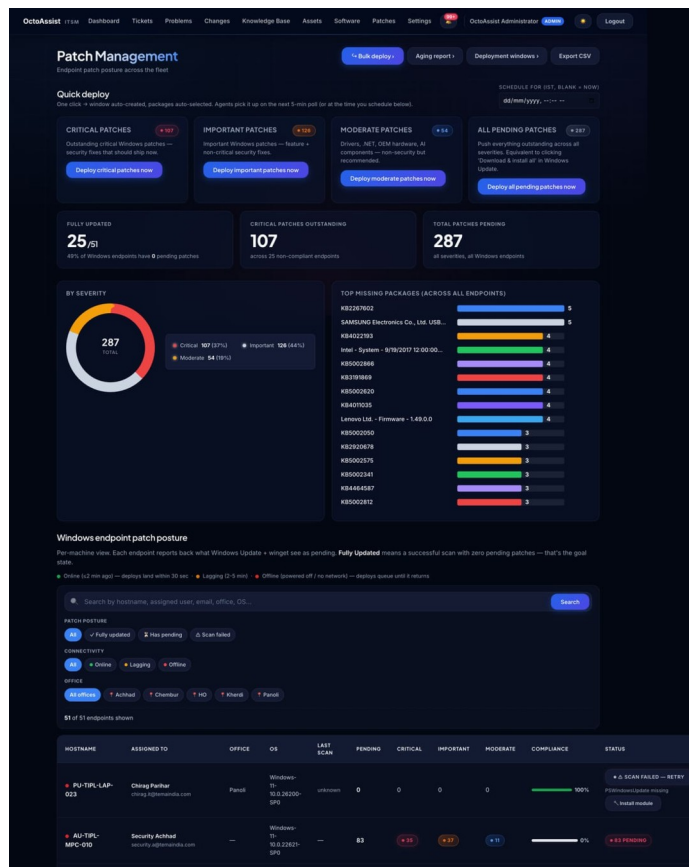


Figure 6 — Patches list — per-endpoint posture.

- Columns include hostname, assigned-to user, office, online status, missing critical count, missing important count, last installed.
- Quick-filter chips at the top: Online · Critical pending · By office · By posture.

7.2 Schedule a patch window

- Open Patches → Patch windows → + New window.
- Pick a start date and time.
- Select targets — individual endpoints, or an Asset Group (e.g. Mumbai laptops).
- Choose Auto-execute (agent installs as soon as window opens) or Manual.
- Save. The window appears in the dashboard and emails the notification address when it starts and completes.

7.3 Browse the asset inventory

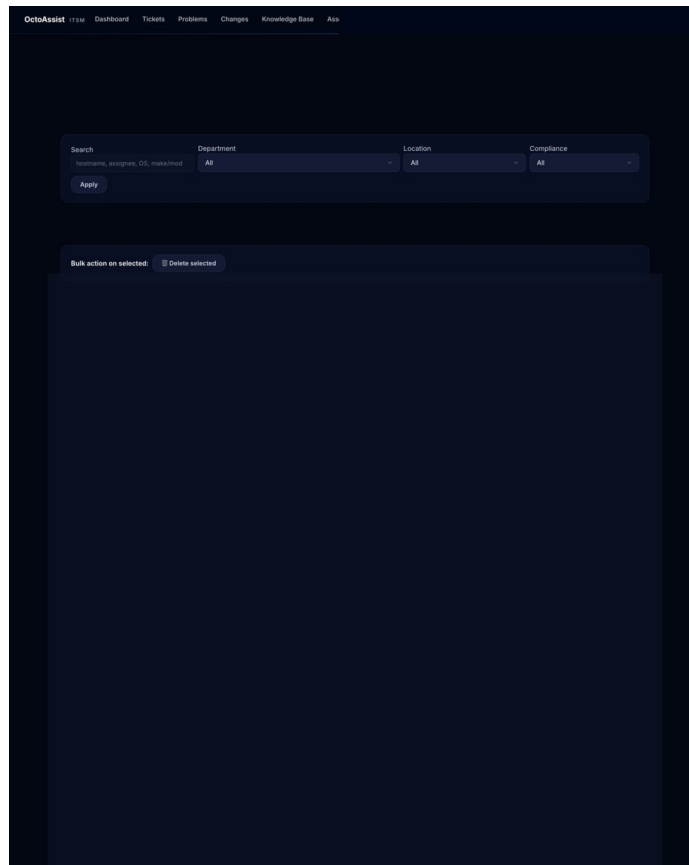


Figure 7 — Assets list. Click any hostname to drill in.

Each asset detail page shows hardware spec, OS, software inventory, Windows Services panel, patch posture and history, remote actions queue, and all tickets the user at this endpoint ever raised.

7.4 Deploy software

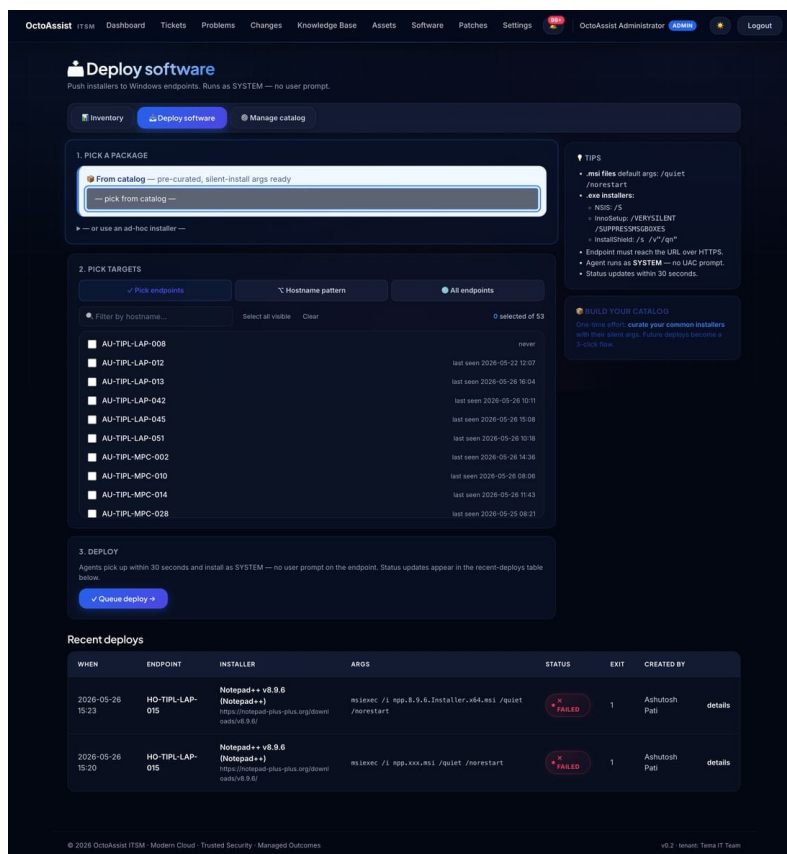


Figure 8 — Software deploy: catalog dropdown + multi-select endpoints.

1. Open Software → Deploy software.
2. Pick a package from the catalog dropdown.
3. Pick target endpoints (multi-select) or pick an Asset Group.
4. Click Queue deploy. Each target picks up the job at its next 30-second check-in, runs the installer with the catalog's silent-install switches, and reports back.

7.5 Install the OctoAssist agent on a new endpoint

On any new Windows endpoint, open an elevated PowerShell and run this one-liner. It downloads the agent installer, registers the endpoint using your tenant enrolment key, and installs the OctoAssist Agent Windows service that auto-starts on boot.

```
powershell -ExecutionPolicy Bypass -Command "Invoke-RestMethod https://octoassist.thirdoctopus.com/agent/install.ps1 | Invoke-Expression"
```

Tip: Copy the up-to-date one-liner from Settings → Tenant — it includes your tenant's enrolment key already filled in.

8. End-User Portal

Every employee in the organisation has access to the OctoAssist requester portal. There are three things you can do here.

- Raise a new ticket.
- View status and replies on your existing tickets.
- Search the Knowledge Base for self-service answers.

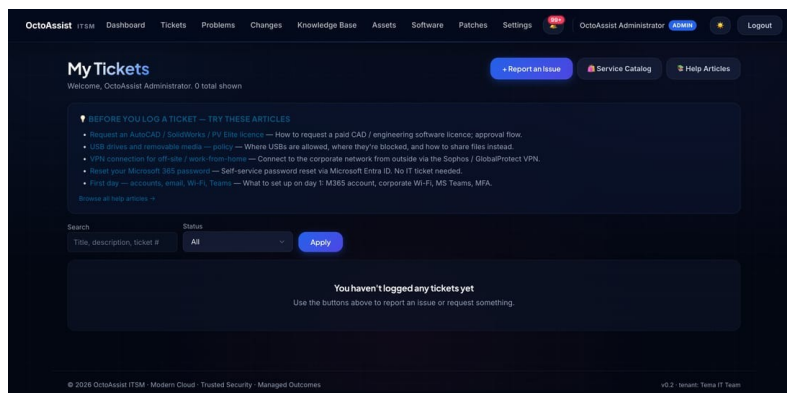


Figure 9 — Portal dashboard showing your open and recent tickets.

8.1 Raise a ticket

1. Open <https://octoassist.thirdoctopus.com/portal> and sign in with your work email.
2. Click + Report an issue (or + Service Catalog for a request).
3. Pick a Category — Software / Hardware / Network / Email / Access. The category determines the SLA.
4. Type a one-line Title that summarises the issue.
5. Add a Description — what you were doing, what you expected, what actually happened, any error messages.
6. Attach screenshots or files if helpful (drag-drop, up to 25 MB each).
7. Click Submit. You'll receive an instant email confirmation with your ticket number.

The screenshot shows the 'Report an Issue' form in the OctoAssist portal. The form is titled 'Report an Issue' and includes a sub-header 'Tell us what's broken or behaving unexpectedly. Attach a screenshot if it helps.' The form fields include: a 'Subject' text box with a placeholder 'One-line summary'; a 'Category' section with buttons for 'Access / Login', 'Email', 'Hardware Issue', 'Network', 'Other', 'Security Concern', and 'Software Issue'; a 'Details / Description' section with a text area and a note 'Please provide a detailed description. Typing in both Subject and Details searches the Knowledge Base in real time to suggest immediate answers.'; an 'Affected Workstation / Asset' dropdown menu with the option '-- No Workstation Linked --'; and an 'Attachments' section with a note 'Optional — screenshots, logs, docs — max 2 MB per file' and a file upload area with a 'Choose files' button. At the bottom of the form are 'Submit' and 'Cancel' buttons. The footer of the page includes copyright information '© 2020 OctoAssist ITSM - Modern Cloud - Trusted Security - Managed Outcomes' and version information 'v2.2 - Internal: Tanya IT Team'.

Figure 10 — Portal: submit a new ticket.

8.2 Reply to a ticket

When the IT team replies you receive an email. Click the link, sign in, type your reply, click Post. Your reply is visible to the assigned technician immediately.

8.3 Search the Knowledge Base

Before raising a ticket for common issues — password reset, VPN setup, printer install, Outlook configuration — try the Knowledge Base. Most articles are step-by-step with screenshots.

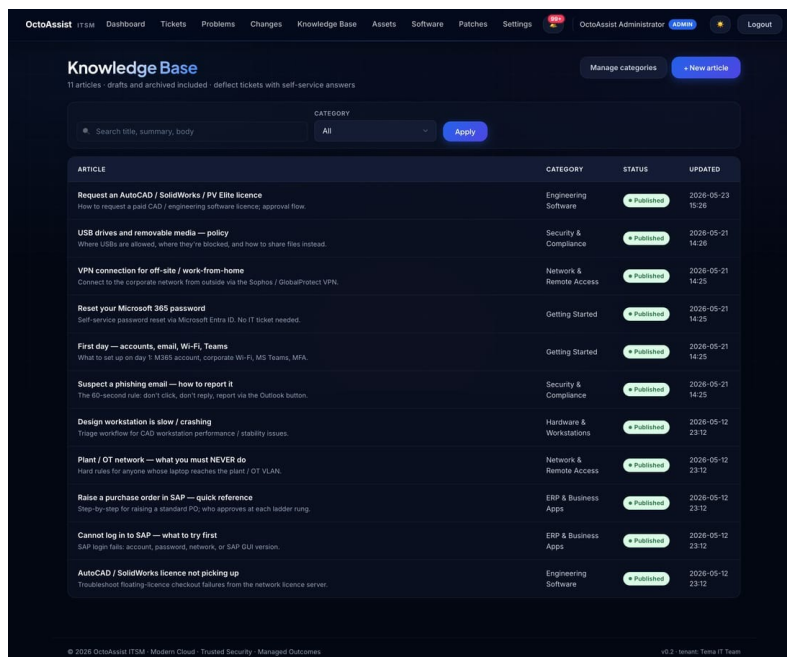


Figure 11 — Knowledge Base: search-first interface.

8.4 Track via email — no login required

Every status change on your ticket fires an email to your inbox. The email contains the ticket number, the status change (e.g. Open → In Progress → Resolved), and the technician's comment. You can reply to that email directly and your reply is added to the ticket as a comment.

9. Configure Settings (Admin)

Settings is admin-only. Open it from the gear icon in the top nav, or by navigating to /settings.

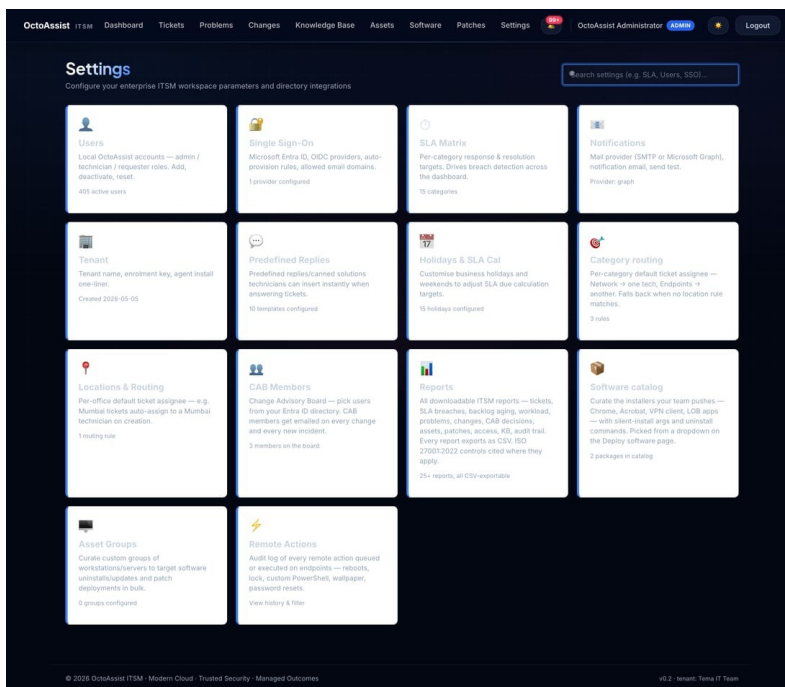


Figure 12 — Settings landing: every configurable area in one tile grid with live counts.

9.1 SLA matrix

Open Settings → SLA Matrix. Each category (Network, Endpoints, Email, Access, etc.) has two SLA values — first response time and resolution time — defined for each of the four priorities.

Categories & SLA Matrix

Add new categories, set per-category response & resolution targets in minutes. Tickets created under a category inherit these defaults. SLA breach detection uses the current values, so changes apply prospectively.

[Add new category](#)

CATEGORY	KIND	DEFAULT PRIORITY	RESPONSE (MIN)	RESOLUTION (MIN)	NEEDS APPROVAL	ACTIVE
INCIDENT						
Access / Login Cannot log in, account locked, MFA issue	incident	high	60	240	☐	☒
Email Email send/receive, calendar, or Outlook issue	incident	high	120	480	☐	☒
Hardware Issue Laptop, desktop, peripheral, or printer hardware fault	incident	medium	240	1440	☐	☒
Network Connectivity, VPN, wifi, or LAN problems	incident	high	120	480	☐	☒
Other Anything that doesn't fit the categories above	incident	medium	480	2880	☐	☒
Security Concern Suspicious activity, malware, or unauthorized access	incident	critical	30	120	☐	☒
Software Issue Crashes, errors, or unexpected behavior in installed software	incident	medium	240	1440	☐	☒
SERVICE REQUEST						
Meeting Room Setup Set up a meeting room for a specific session	service request	low	240	1440	☐	☒
New Laptop Issue a brand laptop to a user (requires approval)	service request	medium	480	4320	☒	☒
Offboarding Revoke resources — revoke access, reclaim hardware	service request	medium	240	1440	☐	☒
Onboarding New user setup — accounts, hardware, access	service request	medium	720	4320	☐	☒

Figure 13 — SLA Matrix: per-category × per-priority targets.

9.2 Holidays and SLA calendar

Open Settings → Holidays & SLA Calendar. Fifteen standard Indian 2026 public holidays are seeded automatically. Add or remove dates that apply to your specific business; SLA business-day math will skip these dates.

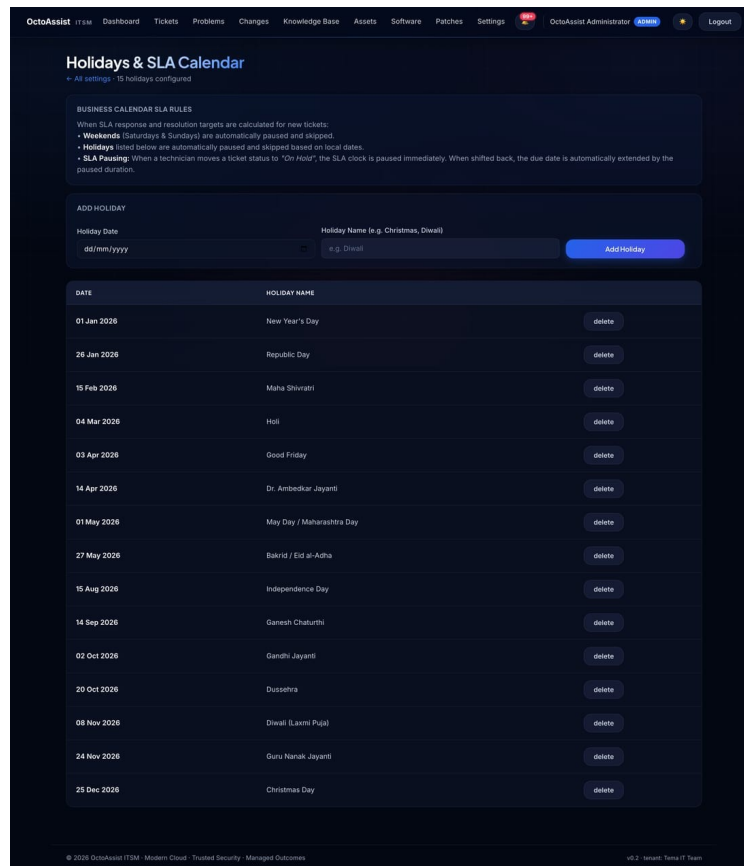


Figure 14 — Holidays calendar.

9.3 Mail provider

Open Settings → Notifications. Microsoft Graph is the recommended path: requires an Entra app registration with Mail.Send application permission. Paste the Client ID, Client Secret (Value), Tenant ID, and the licensed mailbox to send-as.

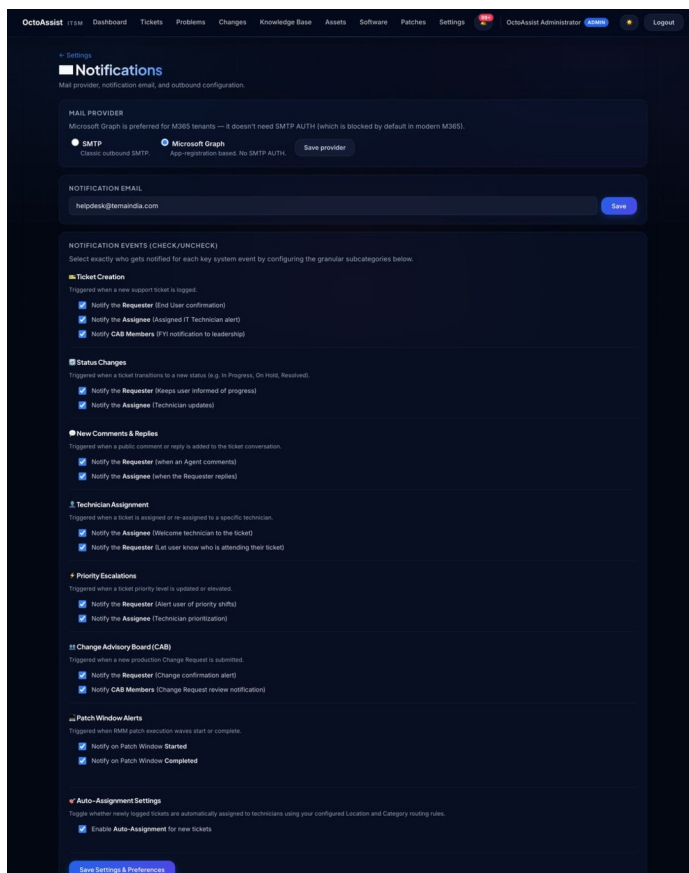



Figure 15 — Mail provider configuration with encrypted client-secret storage.

Tip: After saving the Graph credentials, click Send test email at the top of the same page. A 200/202 response means the wiring is healthy. A 403 from Microsoft means Mail.Send admin consent has not been granted.

9.4 Change Advisory Board

Build the CAB in two steps.

1. Open Settings → CAB Members. Use the search box to find people from your Entra directory; tick the CAB box for each.
2. Open the CAB Committees sub-tab. Two committees are seeded by default — Change Management Committee and Risk Management Committee. Add committees as your governance requires (Security Review, Architecture Review, etc.).

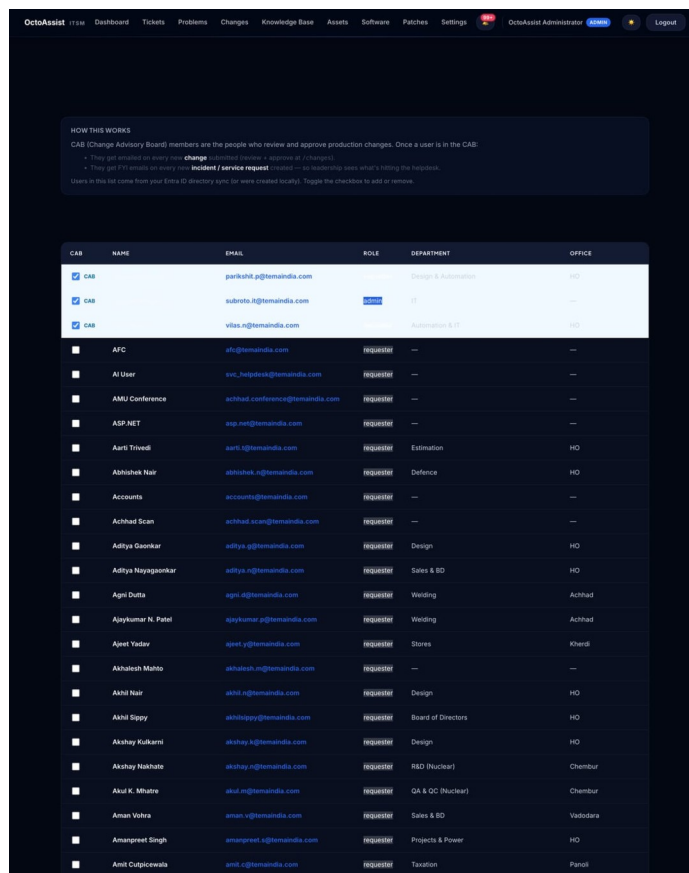


HOW THIS WORKS
CAB (Change Advisory Board) members are the people who review and approve production changes. Once a user is in the CAB:
 • They get emailed on every new **change** (approved, passed, & signed off - changes)
 • They get 24 hours on every **incident / service request** — no backlogs into what's hitting the business.
 Users in this list come from your Entra ID directory sync (or were created locally). Toggle the checkbox to add or remove.

CAB	NAME	EMAIL	ROLE	DEPARTMENT	OFFICE
☒	CAB	parishit.p@temamda.com	Requester	Design & Automation	HO
☒	CAB	subrata.ig@temamda.com	Requester	IT	—
☒	CAB	vikas.n@temamda.com	Requester	Automation & IT	HO
☐	AFC	afc@temamda.com	Requester	—	—
☐	AI User	ai_helpdesk@temamda.com	Requester	—	—
☐	AMU Conference	achhad.conference@temamda.com	Requester	—	—
☐	ASP.NET	asp.net@temamda.com	Requester	—	—
☐	Aarti Trivedi	aarti.ig@temamda.com	Requester	Estimation	HO
☐	Abhishek Nair	abhishek.n@temamda.com	Requester	Defence	HO
☐	Accounts	accounts@temamda.com	Requester	—	—
☐	Achhad Scan	achhad.scan@temamda.com	Requester	—	—
☐	Aditya Gaonkar	aditya.g@temamda.com	Requester	Design	HO
☐	Aditya Mayagankar	aditya.n@temamda.com	Requester	Sales & BD	HO
☐	Agni Dutta	agni.ig@temamda.com	Requester	Welding	Achhad
☐	Ajaykumar N. Patel	ajaykumar.p@temamda.com	Requester	Welding	Achhad
☐	Ajeet Yadav	ajeet.y@temamda.com	Requester	Stores	Kherdi
☐	Akhlesh Maho	akhlesh.m@temamda.com	Requester	—	—
☐	Akshi Nair	akshi.n@temamda.com	Requester	Design	HO
☐	Akshi Sippy	akshisippy@temamda.com	Requester	Board of Directors	HO
☐	Akshay Kulkarni	akshay.k@temamda.com	Requester	Design	HO
☐	Akshay Nakhate	akshay.n@temamda.com	Requester	R&D (Nuclear)	Chembur
☐	Aksh K. Mhatre	aksh.k@temamda.com	Requester	QA & QC (Nuclear)	Chembur
☐	Aman Vohra	aman.v@temamda.com	Requester	Sales & BD	Vadodra
☐	Amanshree Singh	amanshree.s@temamda.com	Requester	Projects & Power	HO
☐	Amit Outpicewala	amit.o@temamda.com	Requester	Taxation	Paroli

Figure 16 — CAB Members with CAB Committees sub-nav.

9.5 Software catalog

Add the installers your team pushes regularly — Chrome, Acrobat, Teams, the VPN client, LOB apps — once. Each entry stores the installer URL, the silent-install switches, and an optional uninstall command. Every package appears in the Software → Deploy dropdown thereafter.

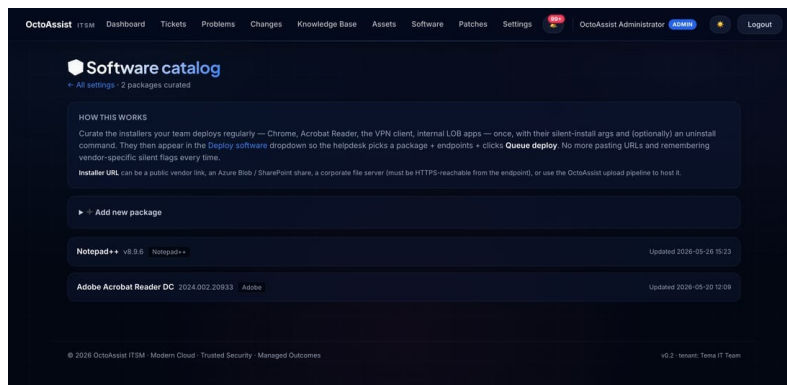

Software catalog
All settings 2 packages curated

HOW THIS WORKS
Curate the installers your team deploys regularly — Chrome, Acrobat Reader, the VPN client, internal LOB apps — once, with their silent-install args and (optionally) an uninstall command. They then appear in the Deploy software dropdown so the helpdesk picks a package + endpoints + clicks **Queue deploy**. No more pasting URLs and remembering vendor-specific silent flags every time.
 Installer URL can be a public vendor link, an Azure Blob / SharePoint share, a corporate file server (must be HTTPS-reachable from the endpoint), or use the OctoAssist upload pipeline to host it.

Add new package

Notepad++	v8.5.6	Notepad++	Updated 2024-05-28 16:23
Adobe Acrobat Reader DC	2024.002.20933	Adobe	Updated 2024-05-20 12:09

© 2024 Octoassist ITSM · Modern Cloud · Trusted Security · Managed Outcomes
v0.2 · Source: Team IT Team

Figure 17 — Software catalog: one entry per installer, reusable.

9.6 Predefined replies

Open Settings → Predefined Replies. Ten professional canned responses are seeded by default — Acknowledge & Investigate, Password Reset Completed, Escalated to Level 2, etc. Edit wording to match your team's voice; agents see these in a dropdown when adding a comment.

Predefined Replies
 10 reply templates configured

HOW THIS WORKS
 Predefined replies (canned solutions) let technicians quickly insert standard responses (e.g. troubleshooting steps, acknowledgement, closure notices) into the ticket reply form. This ensures professional consistency across your IT support team.

ADD PREDEFINED REPLY

Template Title: Sort Order:

Template Text (Body):
 Type the message that will be inserted. You can use standard formatting.

[Add Template](#)

TITLE	TEXT PREVIEW	SORT ORDER	
Acknowledge & Investigate	Hello, We have received your request and are currently investigating the issue. A technician...	1	delete
Request for More Information	Hello, In order to assist you further, could you please provide additional details, error...	2	delete
Password Reset Completed	Hello, Your account password has been successfully reset. Please log in using the temporary...	3	delete
Software Installation Completed	Hello, We have successfully pushed the requested software to your workstation remote agent...	4	delete
Escalated to Level 2 Support	Hello, We have reviewed your ticket and escalated it to our Level 2 engineering support team...	5	delete
Scheduled Maintenance Notice	Hello, The system you reported is scheduled for routine maintenance in the upcoming window. We...	6	delete
On Hold - Pending Vendor Response	Hello, This ticket is currently on hold as we have escalated the issue to the external...	7	delete
On Hold - Pending User Verification	Hello, We have applied a tentative fix. This ticket is on hold awaiting your verification...	8	delete
Issue Resolved & Closing Ticket	Hello, We believe the reported issue has been resolved. We are closing this ticket. If the...	9	delete
Hardware Replacement Arranged	Hello, We have approved a hardware replacement for your workstation. Please visit the IT...	10	delete

© 2026 OctoAssist ITSM - Modern Cloud - Trusted Security - Managed Outcomes V0.2 - Internal - Tenta IT Team

Figure 18 — Predefined Replies.

10. Reports

Reports is the at-a-glance dashboard for IT leadership.

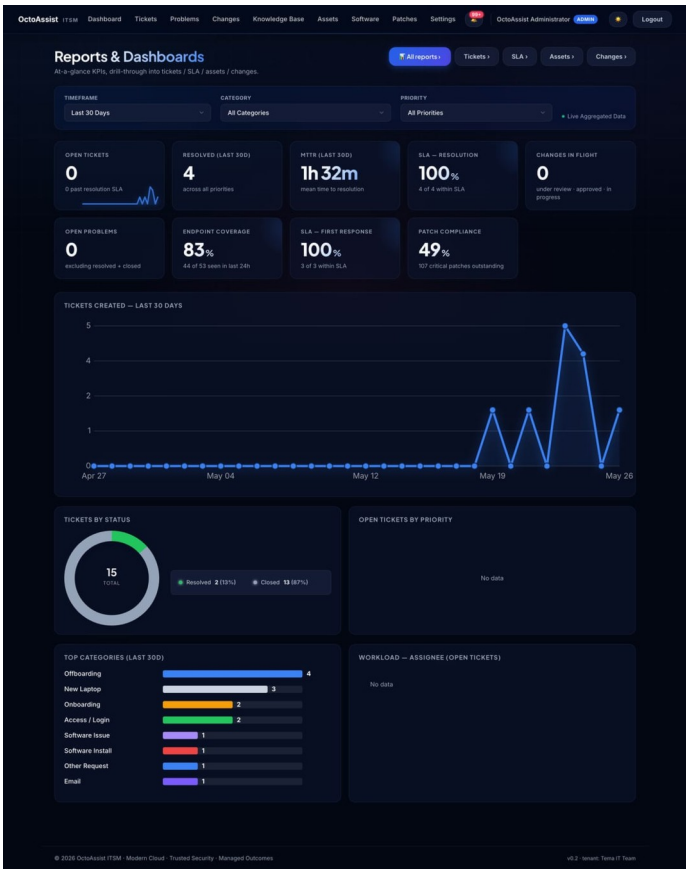


Figure 19 — Reports dashboard with dynamic filter bar.

10.1 Filters

Filter	Values	Purpose
Timeframe	Last 7 / 15 / 30 / 90 / 180 days	Narrow KPIs and charts to a specific look-back window.
Priority	Low / Medium / High / Critical	Focus on Critical for war-room reviews.
Category	Network / Endpoints / Email / Access ...	Show only tickets in this functional area.

10.2 Reports library

Open Reports → Reports library for the full catalogue of 25+ downloadable reports. Each is one click to download as CSV. Reports cite the relevant ISO 27001:2022 control where applicable.

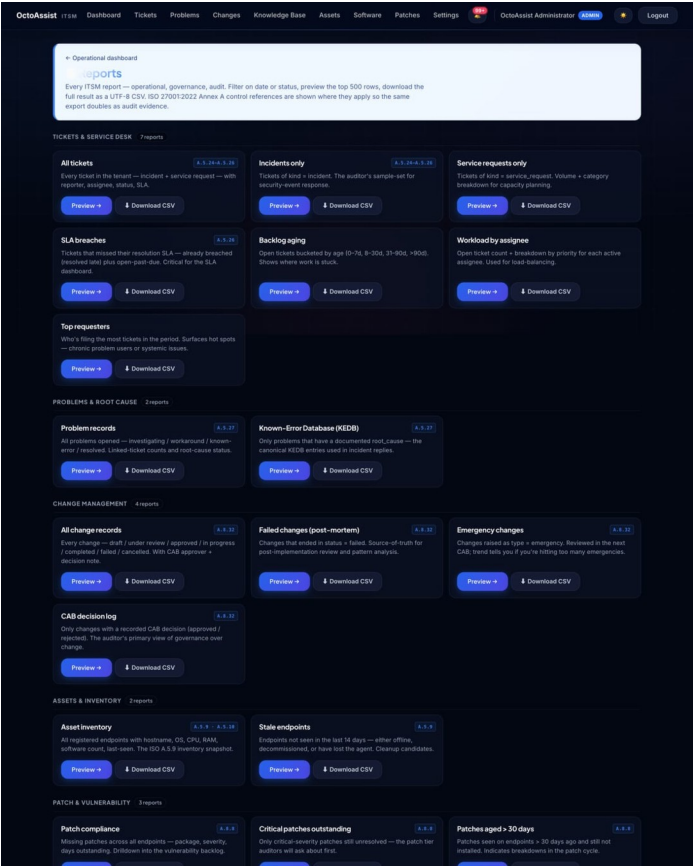


Figure 20 — Reports library.

11. Quick Reference Card

Common tasks and where to find them in OctoAssist.

If you want to ...	Where	Notes
Raise a ticket (agent)	Tickets → + Incident / + Service request	Pick category first — it drives the SLA.
Raise a ticket (requester)	/portal → + Report an issue	Or use the catalog button for a request.
Search the Knowledge Base	Knowledge Base → search box	Articles are category-tagged.
Approve a change	Email link → Changes → CHG-xxxx	Both Approve and Reject must include a comment.
Schedule patches	Patches → Patch windows → + New	Pick group + datetime + auto-execute mode.
Push software to many endpoints	Software → Deploy → pick + group	Group must exist in Settings → Asset Groups.
See endpoint's installed software	Assets → click hostname → Software	Software inventory is reported every check-in.
Add a CAB member	Settings → CAB Members → tick checkbox	They get CAB emails on every Change.
Test email wiring	Settings → Notifications → Send test	200/202 = healthy. 403 = no Mail.Send consent.
Add a public holiday	Settings → Holidays → Add	SLA math will skip this date thereafter.
Download an audit report	Reports → Reports library → pick → CSV	Use the date filters at the top of each report.
Find when something happened	Settings → Remote Actions / Audit report	Full event log with actor + timestamp.

12. Troubleshooting

12.1 Notifications are not arriving

- Open Settings → Notifications. Click Send test email.
- A 200/202 response and an email in your inbox confirms the wiring.
- If the test fails with HTTP 401, the client secret is wrong or expired — rotate it in Azure and paste the new Value.
- If the test fails with HTTP 403, Mail.Send application permission has not been granted with admin consent in Entra — ask your tenant admin to grant it.
- If the test silently no-ops with no email, the Send-as mailbox does not match a licensed Exchange Online mailbox.

12.2 An endpoint shows offline

- On the endpoint, open services.msc and confirm the OctoAssist Agent service is running.
- If stopped, start it. The watchdog scheduled task will keep it running across reboots.
- If absent, re-run the install one-liner from Section 7.5.
- If the service is running but the endpoint still shows offline, check outbound HTTPS to octoassist.thirdoctopus.com from the endpoint — corporate proxies can intercept.

12.3 SLA breaches happening on weekends

Open Settings → Holidays. If your business is closed on Saturdays / Sundays, add them to the holiday calendar or adjust the SLA matrix to use business hours.

12.4 CAB members complain about email volume

CAB members receive an email on every new incident AND on every change. If volume is overwhelming, separate operational visibility from CAB approval — keep senior reviewers in the Change Management committee only, and let one delegate per area receive the incident FYIs.

13. Glossary

Term	Definition
Agent (endpoint)	The Windows service installed on each managed endpoint.
Agent (helpdesk)	A user with the Agent role — a helpdesk technician.
Asset Group	A reusable, named collection of endpoints for bulk targeting.
CAB	Change Advisory Board — the committee that approves infrastructure changes.
Committee	A named sub-group of CAB members (e.g. Change Management, Risk Management).
Enrolment key	Tenant-scoped secret used by the agent installer to register an endpoint.
Incident	An unplanned interruption to service or quality reduction.
Patch window	A scheduled bulk patching operation on a target set of endpoints.
Predefined reply	A canned response agents insert from the comment dropdown.
Problem	A root cause identified to explain one or many recurring incidents.
Requester	An end user who raises tickets through the portal.
Service request	A user-initiated request for provisioning (e.g. install software, reset access).
SLA	Service Level Agreement — time within which a ticket must be responded to or resolved.
Tenant	A logical customer organisation; every record is tenant-scoped.