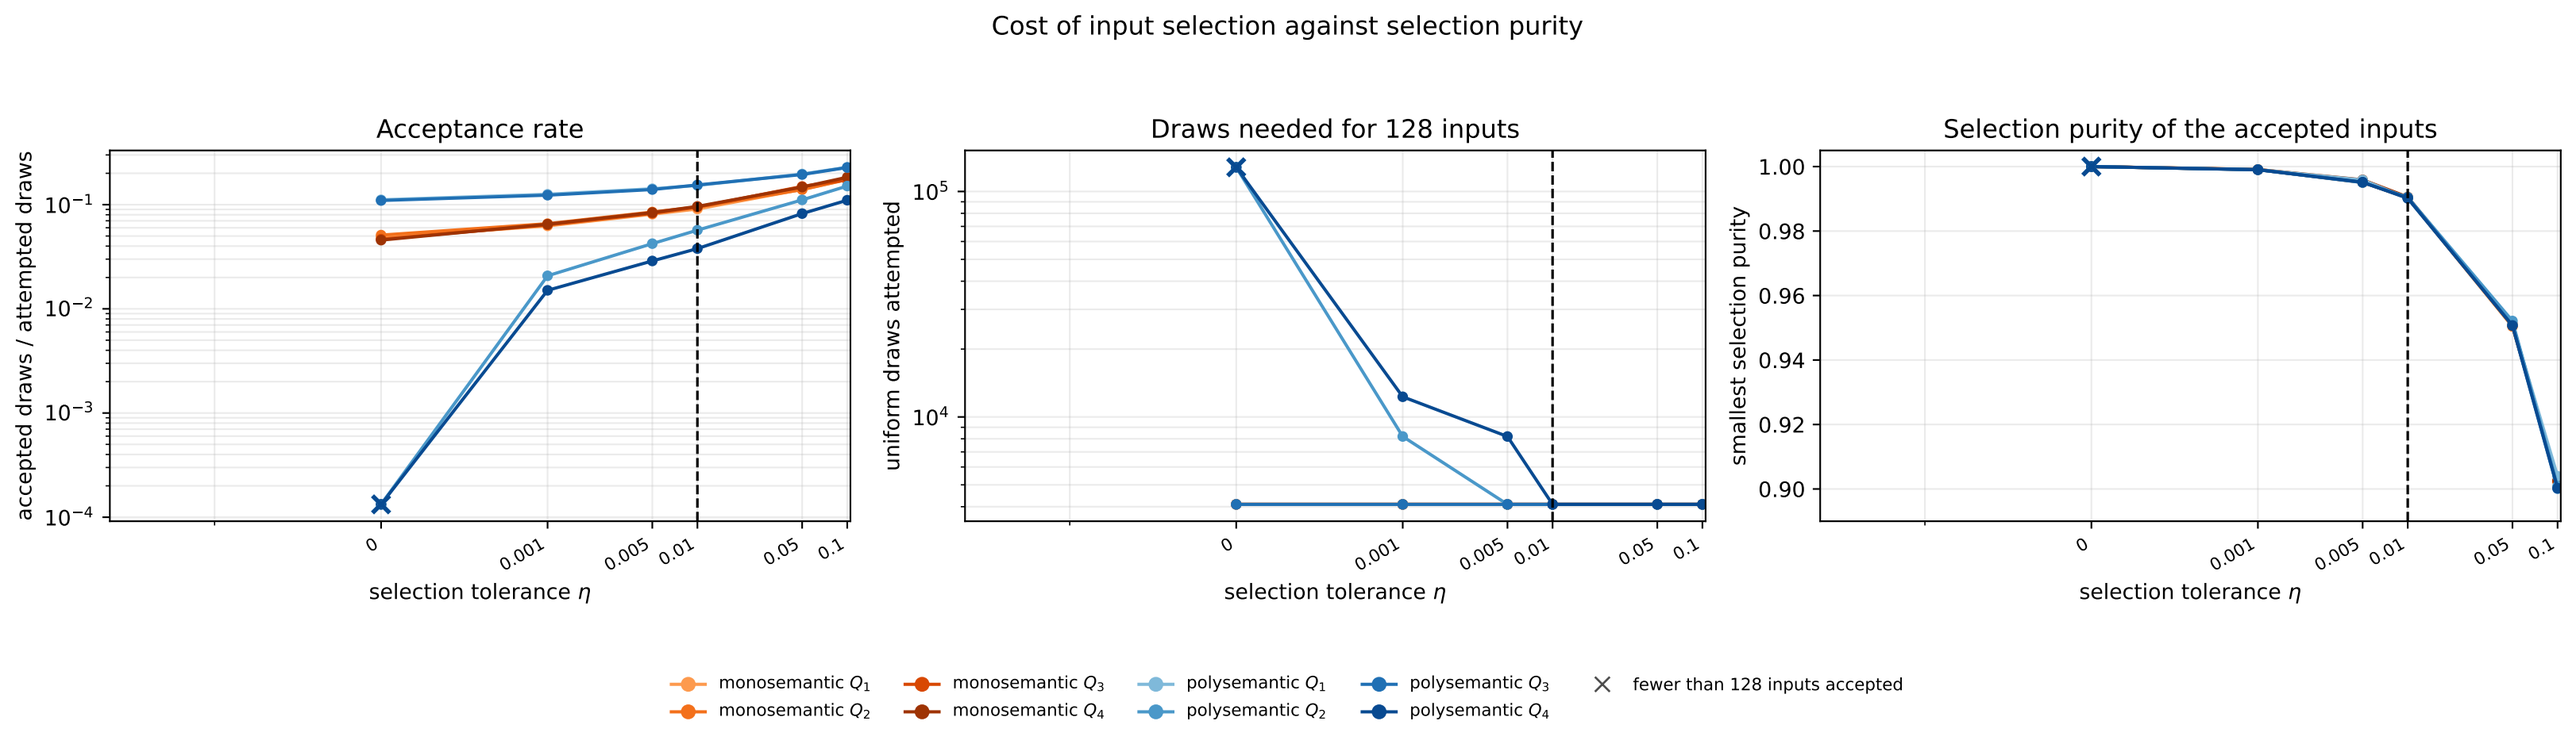
Cost of input selection against selection purity
Acceptance rate
accepted draws / attempted draws
$10^{-1}$
$10^{-2}$
$10^{-3}$
$10^{-4}$
0
0.001
0.005
0.01
0.05
0.1
selection tolerance $\eta$
Draws needed for 128 inputs
uniform draws attempted
$10^{5}$
$10^{4}$
0
0.001
0.005
0.01
0.05
0.1
selection tolerance $\eta$
Selection purity of the accepted inputs
smallest selection purity
1.00
0.98
0.96
0.94
0.92
0.90
0
0.001
0.005
0.01
0.05
0.1
selection tolerance $\eta$
monosemantic $Q_1$
monosemantic $Q_2$
monosemantic $Q_3$
monosemantic $Q_4$
polysemantic $Q_1$
polysemantic $Q_2$
polysemantic $Q_3$
polysemantic $Q_4$
fewer than 128 inputs accepted