




proteusPy: A Python Package for Protein Structure and Disulfide Bond Modeling and Analysis

Eric G Suchanek  ^{1*}

¹ Flux-Frontiers * These authors contributed equally.

DOI: [10.xxxxxx/draft](https://doi.org/10.xxxxxx/draft)

Software

- [Review](#) 
- [Repository](#) 
- [Archive](#) 

Editor: [Open Journals](#) 

Reviewers:

- [@openjournals](#)

Submitted: 01 January 1970

Published: unpublished

License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](#)).

Summary

proteusPy is a Python package specializing in the modeling and analysis of proteins of known structure with an initial focus on Disulfide bonds. This package significantly extends the capabilities of the molecular modeling program **proteus**, (Pabo & Suchanek, 1986), and utilizes a new implementation of the **Turtle3D** class for disulfide and protein modeling. This initial implementation focuses on the **Disulfide** class, which implements methods to analyze the protein structure stabilizing element known as a **Disulfide Bond**.

The work has resulted in a freely-accessible database of over 120,494 disulfide bonds contained within 35,818 proteins in the [RCSB Protein Databank](#). The routines within the library are capable of extracting, comparing, and visualizing the disulfides contained within the database, facilitating analysis and understanding. In addition, the package can readily model disulfide bonds of arbitrary conformation, facilitating predictive analysis.

General Capabilities

- Interactively display disulfides contained in the RCSB in a variety of display styles
- Calculate geometric and energetic properties about these disulfides
- Create binary and sextant structural classes by characterizing the disulfide torsional angles into n classes
- Build idealized disulfide bonds from disulfide dihedral angle input
- Find disulfide neighbors based on dihedral angles
- Overlap disulfides onto a common frame of reference for display
- Build protein backbones from backbone phi, psi dihedral angle templates
- More in development

See <https://suchanek.github.io/proteusPy/proteusPy.html> for the API documentation with examples

Statement of Need

Disulfide bonds represent the sole naturally occurring covalent bond in proteins, playing a pivotal role in structural stabilization within and between protein subunits. Moreover, they participate in enzymatic catalysis, regulate protein activities, and offer protection against oxidative stress. Establishing an accessible structural database of these disulfides would serve as an invaluable resource for exploring these critical structural elements. While the capability to visualize protein structures is well established with excellent protein visualization tools like Pymol, Chimera and the RCSB itself, the tools for disulfide bond analysis are more limited. (Wong & Hogg, 2010) describe a web-based disulfide visualization tool; this is currently unavailable.

39 Accordingly, I have developed the **proteusPy** package to delve into the RCSB Protein Data
40 Bank, furnishing tools for visualizing and analyzing the disulfide bonds contained therein.
41 This endeavor necessitated the creation of a python-based package containing data structures
42 and algorithms capable loading, manipulating and analyzing these entities. Consequently, an
43 object-oriented database has been crafted, facilitating introspection, analysis, and display. The
44 package's API (Suchanek, 2023a) is accessible online at: [proteusPy API](#), offering comprehensive
45 details and numerous illustrative examples.

46 Requirements

- 47 1. PC running MacOS, Linux, Windows with git, git-lfs and make installed
- 48 2. 8 GB RAM
- 49 3. 1 GB disk space

50 Installation

51 It's simplest to clone the repo via GitHub since it contains all of the notebooks, data and
52 test programs. Installation includes installing my Biopython fork. This is required to rebuild
53 the database. I highly recommend using Miniforge since it includes mamba. The installation
54 instructions below assume a clean install with no package manager or compiler installed.

55 MacOS/Linux

- 56 ■ Install Miniforge: <https://github.com/conda-forge/miniforge> (existing Anaconda instal-
57 lations are fine but please install mamba)
- 58 ■ Install git-lfs:
 - 59 – <https://help.github.com/en/github/managing-large-files/installing-git-large-file-storage>
- 60 ■ Install make on your system.
- 61 ■ From a shell prompt while sitting in your repo dir:

```
$ git clone https://github.com/suchanek/proteusPy.git  
$ cd proteusPy  
$ make pkg  
$ mamba activate proteusPy  
$ mamba install vtk  
$ make install
```

62 Windows

- 63 ■ Install Miniforge: <https://github.com/conda-forge/miniforge> (existing Anaconda instal-
64 lations are fine but please install mamba)
- 65 ■ Install git for Windows and configure for Bash:
 - 66 – <https://git-scm.com/download/win>
- 67 ■ Install git-lfs:
 - 68 – <https://git-lfs.github.com/>
- 69 ■ Install GNU make:
 - 70 – <https://gnuwin32.sourceforge.net/packages/make.htm>
- 71 ■ Open a Miniforge prompt and cd into your repo dir:

```
(base) C:\Users\egs\repos> git clone https://github.com/suchanek/proteusPy.git
(base) C:\Users\egs\repos> cd proteusPy
(base) C:\Users\egs\repos\proteuspy> make pkg
(base) C:\Users\egs\repos> conda activate proteusPy
(proteusPy) C:\Users\egs\repos> make install
```

Testing

I currently have pytest and docstring testing for the modules in place. To run them cd into the repository and run:

```
$ make tests
```

The modules will 1) run pytest for the main modules and 2) perform docstring tests. This will result in a number of disulfide visualization windows to open. Simply close them. If all goes normally there will be no errors. (you may need to install pytest via `pip install pytest`).

General Usage

Once the package is installed one can use the existing notebooks for analysis of the RCSB Disulfide database.

The `notebooks` directory contains all of my Jupyter notebooks and is a good place to start:

- `Analysis_2q7q.ipynb` provides an example of visualizing the lowest energy Disulfide contained in the database and searching for nearest neighbors on the basis of conformational similarity.

The `programs` subdirectory contains the primary programs for downloading the RCSB disulfide-containing structure files:

- `DisulfideDownloader.py`: Downloads the raw RCSB structure files.
- `DisulfideExtractor.py`: Extracts the disulfides and creating the database loaders
- `DisulfideClass_Analysis.py`: Performs binary or sextant analysis on the disulfide database.

The first time one loads the database via `Load_PDB_SS()` the system will attempt to download the full and subset database from Google Drive. If this fails the system will attempt to rebuild the database from the repo's `data` subdirectory (not the package's). If you've downloaded from github this will work correctly. If you've installed from pyPi via `pip` it will fail.

Quickstart

After installation is complete, launch jupyter lab:

```
$ jupyter lab
```

and open `Analysis_2q7q`. This notebook analyzes the disulfide bond with the lowest energy in the entire database and performs some searches in dihedral angle space to find similar conformations. There are several other notebooks in this directory that illustrate using the program. Some of these reflect active development work so may not be 'fully baked'.

Class Details

The primary classes developed for `proteusPy` are described briefly below. Please see the `API` for details.

Disulfide

This class provides a Python object and methods representing a physical disulfide bond either extracted from the RCSB protein databank or a virtual one built using the [Turtle3D](#) class. The disulfide bond is an important intramolecular stabilizing structural element and is characterized by:

- Atomic coordinates for the atoms $N, C_\alpha, C_\beta, C', S_\gamma$ for both amino acid residues. These are stored as both raw atomic coordinates as read from the RCSB file and internal local coordinates.
- The dihedral angles $\chi_1 - \chi_5$ for the disulfide bond
- A name, by default: $\{\text{pdb_id}\}\{\text{prox_resnum}\}\{\text{prox_chain}\}\{\text{distal_resnum}\}\{\text{distal_chain}\}$
- Proximal residue number
- Distal residue number
- Approximate bond torsional energy (kcal/mol):

$$E_{\text{kcal/mol}} \approx 2.0 * \cos(3.0 * \chi_1) + \cos(3.0 * \chi_5) + \cos(3.0 * \chi_2) + \cos(3.0 * \chi_4) + 3.5 * \cos(2.0 * \chi_3) + 0.6 * \cos(3.0 * \chi_3) + 10.1$$

- Euclidean length of the dihedral angles (degrees) defined as:

$$\sqrt{(\chi_1^2 + \chi_2^2 + \chi_3^2 + \chi_4^2 + \chi_5^2)}$$

- $C_\alpha - C_\alpha$ distance (Å)
- $C_\beta - C_\beta$ distance (Å)
- The previous C' and next N coordinates for both the proximal and distal residues. These are needed to calculate the backbone dihedral angles ϕ, ψ .
- Backbone dihedral angles ϕ and ψ , when possible. Not all structures are complete and in those cases the atoms needed may be undefined. In this case the ϕ and ψ angles are set to -180° .

The class also provides 3D rendering capabilities using the excellent [PyVista](#) library, and can display disulfides interactively in a variety of display styles:

- 'sb' - Split Bonds style - bonds colored by their atom type
- 'bs' - Ball and Stick style - split bond coloring with small atoms
- 'pd' - Proximal/Distal style - bonds colored *Red* for proximal residue and *Green* for the distal residue.
- 'cpk' - CPK style rendering, colored by atom type:
 - Carbon - Grey
 - Nitrogen - Blue
 - Sulfur - Yellow
 - Oxygen - Red
 - Hydrogen - White

Individual renderings can be saved to a file and animations can be created. The *cpk* and *bs* styles are illustrated below:

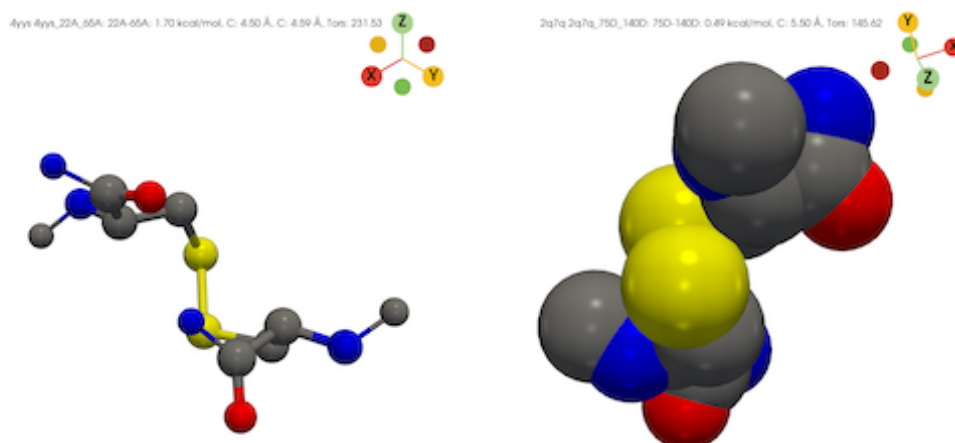


Figure 1: CPK & BS Disulfide Rendering

DisulfideLoader

This class encapsulates the disulfide database itself and is its primary means of accession. Instantiation takes 2 parameters: **subset** and **verbose**. Given the size of the database, one can use the **subset** parameter to load the first 1000 disulfides into memory. This facilitates quicker development and testing new functions. I recommend using a machine with 16GB or more to work with the full dataset.

The entirety of the RCSB disulfide database is stored within the class via a **DisulfideList**, a **Pandas** .csv file, and a **dict** of indices mapping the RCSB IDs into their respective list of disulfide bond objects. The datastructures allow simple, direct and flexible access to the disulfide structures contained within. This makes it possible to access the disulfides by array index, RCSB structure ID or disulfide name.

Example:

```
import proteusPy
from proteusPy.Disulfide import Disulfide
from proteusPy.DisulfideLoader import DisulfideLoader
from proteusPy.DisulfideList import DisulfideList

SS1 = DisulfideList([], 'tmp1')
SS2 = DisulfideList([], 'tmp2')

PDB_SS = DisulfideLoader(verbose=False, subset=True)

# Accessing by index value:
SS1 = PDB_SS[0]
SS1
<Disulfide 4yys_22A_65A, Source: 4yys, Resolution: 1.35 Å>

# Accessing by PDB_ID returns a list of Disulfides:
SS2 = PDB_SS['4yys']
SS2
[<Disulfide 4yys_22A_65A, Source: 4yys, Resolution: 1.35 Å>,
<Disulfide 4yys_56A_98A, Source: 4yys, Resolution: 1.35 Å>]
```

```

172 <Disulfide 4yys_156A_207A, Source: 4yys, Resolution: 1.35 Å>
173
174 # Accessing individual disulfides by their name:
175 SS3 = PDB_SS['4yys_56A_98A']
176 SS3
177 <Disulfide 4yys_56A_98A, Source: 4yys, Resolution: 1.35 Å>
178
179 # Finally, we can access disulfides by regular slicing:
180 SSlist = SS2[:2]
181 [<Disulfide 4yys_56A_98A, Source: 4yys, Resolution: 1.35 Å>,
182 <Disulfide 4yys_156A_207A, Source: 4yys, Resolution: 1.35 Å>]

```

183 The class can also render Disulfides overlaid on a common coordinate system to a pyVista window using the [DisulfideLoader.display_overlay\(\)](#) method.

185 **NB:** For typical usage one accesses the database via the `Load_PDB_SS()` function. This function loads the compressed database from its single source. Initializing a `DisulfideLoader` object will load the individual torsions and disulfide `.pkl` files, builds the classlist structures, and writes the completely built object to a single `.pkl` file. This requires the raw `.pkl` files created by the download process. These files are contained in the `repository data` directory, not in the `pyPi` distribution.

191 turtle3D

192 The `turtle3D` class represents an object that maintains a *local coordinate system* in three dimensional space. This coordinate system consists of:

- 194 ▪ A Position in 3D space
- 195 ▪ A Heading Vector
- 196 ▪ A Left Vector
- 197 ▪ An Up Vector

198 The *Heading*, *Left* and *Up* vectors are unit vectors that define the object's orientation in a *local* coordinate frame. The turtle developed in `proteusPy` is based on the excellent book by Abelson: ([Abelson & DiSessa, 1986](#)). The `to_local` and `to_global` methods convert between these two coordinate systems. These methods make it possible to readily compare different disulfides by:

- 203 1. Orienting the turtle at the disulfide's proximal residue in a standard orientation.
- 204 2. Converting the global coordinates of the disulfide as read from the RCSB into local coordinates.
- 205 3. Saving all of the local coordinates with the raw coordinates
- 206 4. Performing distance and angle calculations

208 By implementing the functions **Move**, **Roll**, **Yaw**, **Pitch** and **Turn** the turtle is capable of movement in a three-dimensional space. See ([Pabo & Suchanek, 1986](#)) for more details.

210 The turtle has several molecule-specific functions including `orient_at_residue` and `orient_from_backbone`. These routines make it possible to build protein backbones of arbitrary conformation and to readily add sidechains to modeled structures. These functions are currently used to build model disulfides from dihedral angle input.

214 Examples

215 I illustrate a few use cases for the package below. Use the `jupyter lab` command from your shell to launch jupyter. The examples illustrate the ease with which one can analyze and visualize some disulfides.

218 **Find the lowest and highest energy disulfides present in the database**

```
from proteusPy.DisulfideLoader import Load_PDB_SS
from proteusPy.DisulfideList import DisulfideList
from proteusPy.Disulfide import Disulfide

# load the database
PDB_SS = Load_PDB_SS(verbose=True, subset=False)

# retrieve the minimum and maximum energy structures
ssMin, ssMax = PDB_SS.SSList.minmax_energy

# make a list to hold them
minmaxlist = DisulfideList([ssMin, ssMax], "minmax")

# display them as ball and stick style
minmaxlist.display(style="bs", light=True)
```

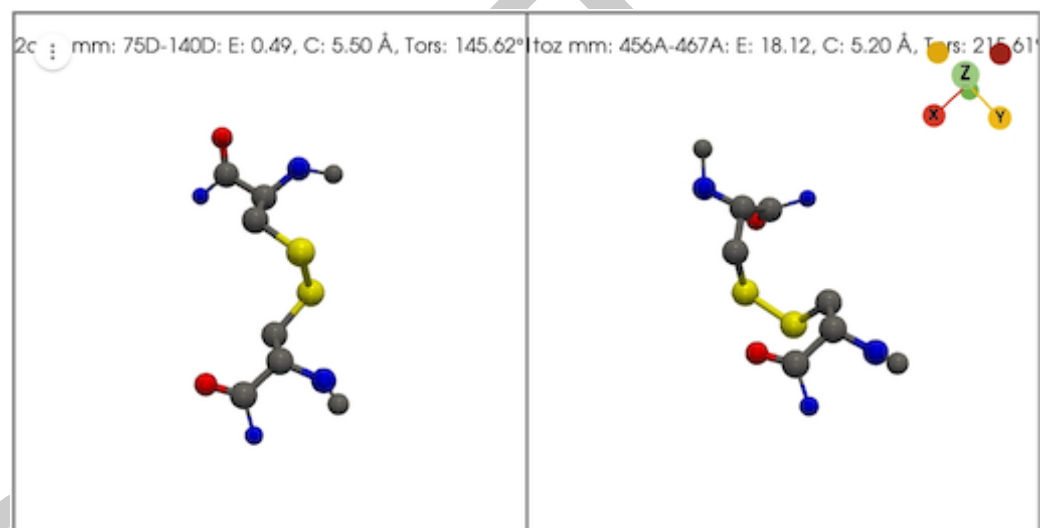


Figure 2: minmax

219 **Find disulfides within 10 Å RMS in torsional space of the lowest energy**
220 **structure**

221 In this example we load the disulfide database, find the disulfides with the lowest and highest
222 energies, and then find the nearest conformational neighbors. Finally, we display the neighbors
223 overlaid against a common reference frame. Note that the window title gives statistics about
224 the list of disulfides being displayed, including list name, resolution, number, average energy,
225 and average atom positional error.

```
import proteusPy
from proteusPy.DisulfideLoader import Load_PDB_SS
from proteusPy.DisulfideList import DisulfideList
from proteusPy.Disulfide import Disulfide

PDB_SS = None
PDB_SS = Load_PDB_SS(verbose=False, subset=False)
ss_list = DisulfideList([], "tmp")
```



```
# Return the minimum and maximum energy structures. We ignore the maximum in this case.
ssmin_enrg, _ = PDB_SS.SSList.minmax_energy

# Make an empty list and find the nearest neighbors within 10 degrees avg RMS in
# sidechain dihedral angle space.

low_energy_neighbors = DisulfideList([], "Neighbors")
low_energy_neighbors = ssmin_enrg.Torsion_neighbors(sslist, 10)

# Display the number found, and then display them overlaid onto their common reference f

tot = low_energy_neighbors.length
low_energy_neighbors.display_overlay()
```

226

18

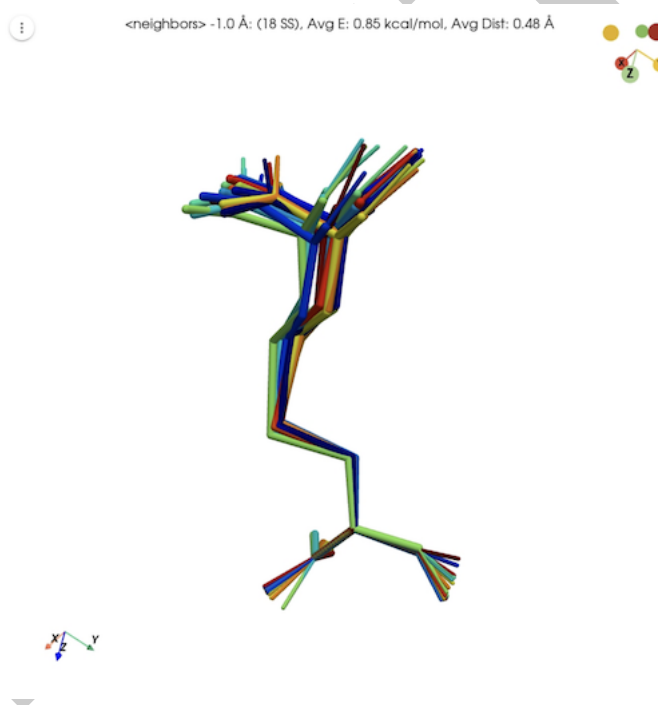


Figure 3: Low energy neighbors

Analyzing Disulfide Structural Class Distributions

227

228 The package includes the [DisulfideClassConstructor](#) class, which is used to create and manage
 229 Disulfide binary and sextant classes. A note about these structural classes is in order. ([Schmidt,](#)
 230 [2006](#)) described a method of characterizing disulfide structures by describing each individual
 231 dihedral angle as either + or - based on its sign. This yields 2^5 or 32 possible classes. The
 232 author was then able to classify protein functional families into one of 20 remaining structural
 233 classes. Since the binary approach is very coarse and computers are much more capable than
 234 in 2006 I extended this formalism to a *Sextant* approach. In other words, I created *six* possible
 235 classes for each dihedral angle by dividing it into 60 degree segments. This yields a possible
 236 6^5 or 7,776 possible classes. The notebook [DisulfideClassesPlayground.ipynb](#) contains some
 237 initial results. This work is ongoing.

281 complexity as a function of total cylinders rendered, but it can still be less than perfect.
282 The faster your GPU the better!

283 Visualizing Disulfides with pyVista

284 PyVista is an excellent 3D visualization framework and I've used it for the Disulfide visualization
285 engine. It uses the VTK library on the back end and provides high-level access to 3d rendering.
286 The menu strip provided in the Disulfide visualization windows allows the user to turn borders,
287 rulers, bounding boxes on and off and reset the orientations. Please try them out! There is
288 also a button for *local* vs *server* rendering. *Local* rendering is usually much smoother. To
289 manipulate: - Click and drag your mouse to rotate - Use the mouse wheel to zoom (3 finger
290 zoom on trackpad)

291 Developer's Notes:

292 The .pkl files needed to instantiate this class and save it into its final .pkl file are defined in
293 the [proteusPy.data](#) class and should not be changed. Upon initialization the class will load
294 them and initialize itself.

295 NB: ([Suchanek, 2023b](#)) disulfide database creation relies on my [fork](#) of the [Biopython](#) Python
296 package to download and build the database, (<https://github.com/suchanek/biopython>). As
297 a result, one can't download and create the database locally unless the BioPython patch is
298 applied. Database analysis is unaffected without this, however.

299 Contributing/Reporting

300 I welcome anyone interested in collaborating on proteusPy! Feel free to contact me
301 at suchanek@mac.com, fork the [repo](#) and get coding. Issues can be reported to
302 <https://github.com/suchanek/proteusPy/issues>.

303 Bibliography

- 304 Abelson, H., & DiSessa, A. A. (1986). *Turtle geometry: The computer as a medium for*
305 *exploring mathematics*. MIT Press.
- 306 Hamelryck, T., & Manderick, B. (2003). PDB file parser and structure class implemented
307 in python. *Bioinformatics*, 19(17), 2308–2310. [https://doi.org/10.1093/bioinformatics/](https://doi.org/10.1093/bioinformatics/btg2994)
308 [btg2994](https://doi.org/10.1093/bioinformatics/btg2994)
- 309 Pabo, C. O., & Suchanek, E. G. (1986). Computer-aided model-building strategies for protein
310 design. *Biochemistry*, 25(20), 5987–5991. <https://doi.org/10.1021/bi00368a023>
- 311 Schmidt, B. (2006). Multiple disulfide-bonded states of native proteins: Estimate of number
312 using probabilities of disulfide bond formation. *Biochemistry*, 45(24), 7429–74334. <https://doi.org/10.1021/bi0603064>
313
- 314 Suchanek, E. G. (2023a). proteusPy API. In *GitHub Documents*. GitHub. [https://suchanek.](https://suchanek.github.io/suchanek/proteusPy/proteusPy.html)
315 [github.io/suchanek/proteusPy/proteusPy.html](https://suchanek.github.io/suchanek/proteusPy/proteusPy.html)
- 316 Suchanek, E. G. (2023b). proteusPy: A package for modeling and analyzing proteins of known
317 structure. In *GitHub repository*. GitHub. <https://github.com/suchanek/proteusPy>
- 318 Wong, J. H., & Hogg, P. J. (2010). Analysis of disulfide bonds in protein structures. *Journal*
319 *of Thrombosis and Haemostasis*, 8(10), 2345. [https://doi.org/10.1111/j.1538-7836.2010.](https://doi.org/10.1111/j.1538-7836.2010.03894.x)
320 [03894.x](https://doi.org/10.1111/j.1538-7836.2010.03894.x)