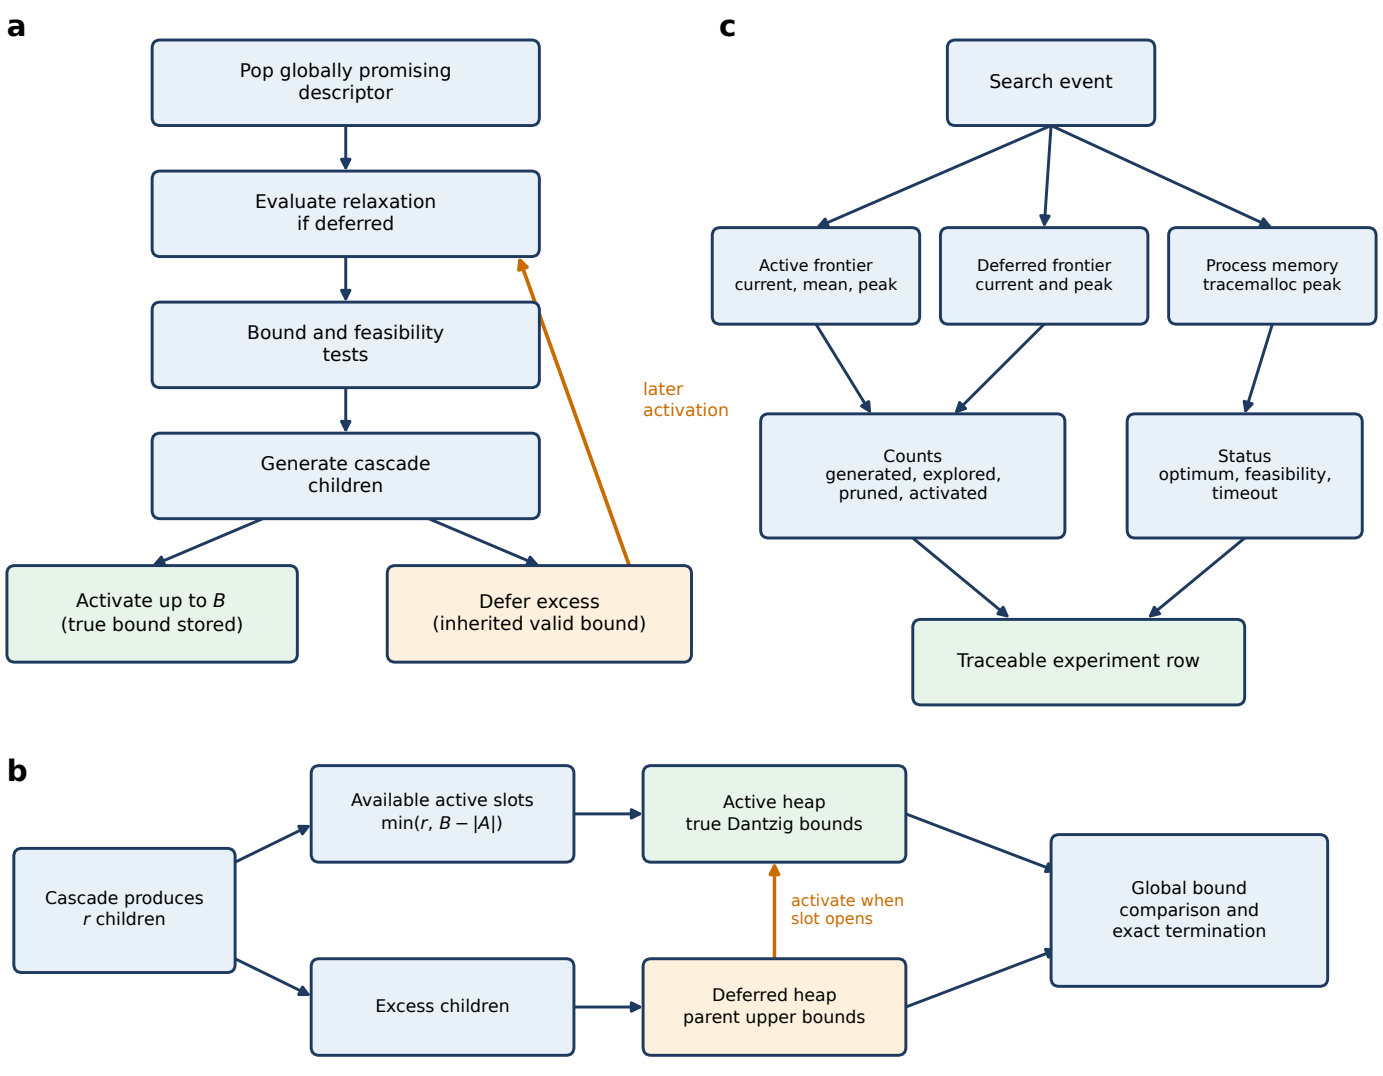
a
Pop globally promising descriptor
Evaluate relaxation if deferred
Bound and feasibility tests
Generate cascade children
Activate up to B (true bound stored)
Defer excess (inherited valid bound)
later activation
c
Search event
Active frontier current, mean, peak
Deferred frontier current and peak
Process memory tracemalloc peak
Counts generated, explored, pruned, activated
Status optimum, feasibility, timeout
Traceable experiment row
b
Cascade produces r children
Available active slots min(r, B − |A|)
Excess children
Active heap true Dantzig bounds
Deferred heap parent upper bounds
activate when slot opens
Global bound comparison and exact termination