

RNA-seq analysis: SLBP

Sudarshan Chari

9/8/2019

This R Markdown document contains a walk-through for analyzing pooled (single-end) RNA-seq on single *D.melanogaster* histone overexpression mutant embryos caused by a knockdown of *Slbp* (Stem loop binding protein) gene and corresponding wild-type/ control. Raw transcript count data obtained by mapping to a reference transcriptome using Salmon (slurm/bash scripts calling the relevant functions to preprocess and map are in another repository).

This document includes

- performing differential gene expression (DE) analysis of single stage and time-series RNA-seq
- Gene enrichment analysis with other independent datasets from
- Gene ontology analysis
- custom plotting/ visualization in base R, ggplot2 and pheatmap

“Desktop/RNaseq_output/” has been used as a local directory for this project, but that can be changed to any desired local or cloud based directory.

```
# Libraries for RNA-seq count data analysis
library(tximport)
library(DESeq2)
library(apeglm)
library(vsn)
library(sva)
library(magrittr)
library(matrixStats)
library(metaRNASeq)

# Libraries for data handling and visualization
library(ggplot2)
library(dplyr)
library(pheatmap)
library(RColorBrewer)
library(genefilter)
library(dendsort)
library(reshape2)

#Libraries for database and GO analysis
library(goseq)
library(GO.db)
library(TxDb.Dmelanogaster.UCSC.dm6.ensGene)
library(org.Dm.eg.db)
```

Loading Gene annotation datasets transcript to geneID to gene name mappings, downloaded from flybase

```
setwd("~/Desktop/RNaseq_output/Abo_Wt_StagedNC_flybase_transcriptome/")
ttg.slbp <- read.table("scripts_samples_ttg/flybase_transcript_to_gene.txt", h=T)
head(ttg.slbp)
```

##	txId	Gene
----	------	------

```
## 1 FBtr0081624 dmel_7SLRNA:CR32864
## 2 FBtr0100521          dmel_a
## 3 FBtr0071764          dmel_a
## 4 FBtr0342981          dmel_a
## 5 FBtr0071763          dmel_a
## 6 FBtr0083388          dmel_abd-A
```

```
fbgn.gene.conv <- read.table ("scripts_samples_ttg/flybase_fbgn_to_gene.tsv", h=T)
head(fbgn.gene.conv)
```

```
##          geneId      Gene
## 1 FBgn0262029      dmel_d
## 2 FBgn0052532 dmel_CG32532
## 3 FBgn0023536 dmel_CG3156
## 4 FBgn0029718 dmel_mRpL30
## 5 FBgn0031101 dmel_CG1631
## 6 FBgn0030952 dmel_CG12609
```

Differential Gene expression analysis

The differential gene expression analysis is split into the following phases

- exploratory analysis of the whole data to understand general trends
- comparisons of specific developmental stages to understand stage specific

Exploratory Analysis

```
setwd("~/Desktop/RNAseq_output/Abo_Wt_StagedNC_flybase_transcriptome/data/SLBP/main/")
# Reading in the sample information file
sample.slbp.all <- read.csv("salmon_data_slbp_main_pilot_inc/samples_slbp_wt_main_pilot_inc.csv", h=T)
str(sample.slbp.all)
```

```
## 'data.frame':    28 obs. of  7 variables:
## $ Sample      : Factor w/ 28 levels "SLBP_NCO_Pre9_R1_B2",...: 1 2 3 4 5 6 7 8 9 10 ...
## $ Genotype    : Factor w/ 2 levels "SLBP","WT": 1 1 1 1 1 1 1 1 1 1 ...
## $ Cycle       : Factor w/ 5 levels "NCO_Pre9","NC13",...: 1 1 1 1 1 2 2 2 2 2 ...
## $ Replicate   : Factor w/ 6 levels "R1","R2","R3",...: 1 2 3 4 5 1 1 2 2 3 ...
## $ Gen_Rep     : Factor w/ 25 levels "SLBP_NCO_Pre9_R1",...: 1 2 3 4 5 6 6 7 7 8 ...
## $ Gen_Rep_Batch: Factor w/ 28 levels "SLBP_NCO_Pre9_R1_B2",...: 1 2 3 4 5 6 7 8 9 10 ...
## $ Gen_Cyc     : Factor w/ 5 levels "SLBP_NCO_Pre9",...: 1 1 1 1 1 2 2 2 2 2 ...
```

```
head(sample.slbp.all)
```

```
##          Sample Genotype   Cycle Replicate      Gen_Rep
## 1 SLBP_NCO_Pre9_R1_B2    SLBP NCO_Pre9      R1 SLBP_NCO_Pre9_R1
## 2 SLBP_NCO_Pre9_R2_B2    SLBP NCO_Pre9      R2 SLBP_NCO_Pre9_R2
## 3 SLBP_NCO_Pre9_R3_B2    SLBP NCO_Pre9      R3 SLBP_NCO_Pre9_R3
## 4 SLBP_NCO_Pre9_R4_B2    SLBP NCO_Pre9      R4 SLBP_NCO_Pre9_R4
## 5 SLBP_NCO_Pre9_R5_B2    SLBP NCO_Pre9      R5 SLBP_NCO_Pre9_R5
## 6      SLBP_NC13_R1_B1    SLBP      NC13      R1      SLBP_NC13_R1
```

```

##           Gen_Rep_Batch           Gen_Cyc
## 1 SLBP_NCO_Pre9_R1_B2 SLBP_NCO_Pre9
## 2 SLBP_NCO_Pre9_R2_B2 SLBP_NCO_Pre9
## 3 SLBP_NCO_Pre9_R3_B2 SLBP_NCO_Pre9
## 4 SLBP_NCO_Pre9_R4_B2 SLBP_NCO_Pre9
## 5 SLBP_NCO_Pre9_R5_B2 SLBP_NCO_Pre9
## 6      SLBP_NC13_R1_B1      SLBP_NC13

levels(sample.slbp.all$Gen_Cyc)

## [1] "SLBP_NCO_Pre9" "SLBP_NC13"      "WT_NCO_Pre9"      "WT_NC13"
## [5] "WT_NC14"

sample.slbp.all$Gen_Cyc <- relevel(sample.slbp.all$Gen_Cyc, ref="WT_NCO_Pre9")
# Ordering the dataset such that WT_NCO_Pre9
# i.e. the most initial developmental stages is the reference for all comparisons

# Reading in the raw count matrix files and converting it into a DESeq object
files.slbp.all <- file.path("salmon_data_slbp_main_pilot_inc", sample.slbp.all$Sample, "quant.sf")
names(files.slbp.all) <- paste0("Sample", 1:28)
all(file.exists(files.slbp.all))

## [1] TRUE

txi.slbp.all <- tximport(files.slbp.all, type = "salmon", tx2gene = ttg.slbp)

## reading in files with read_tsv

## 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28
## summarizing abundance
## summarizing counts
## summarizing length

names(txi.slbp.all)

## [1] "abundance"      "counts"          "length"
## [4] "countsFromAbundance"

rownames(sample.slbp.all) <- colnames(txi.slbp.all$counts)
ddsTxi.slbp.all <- DESeqDataSetFromTximport(txi.slbp.all, colData = sample.slbp.all, design = ~ Gen_Cyc)

## using counts and average transcript lengths from tximport

# The design here is Gen_Cyc == Genotype*Cycle == Genotype + Cycle + Genotype:Cycle
# main and interaction effects of Genotype and Cell cycle

```

There are a couple of other manipulations that can be performed before performing the actual analysis

- The same libraries were sequenced on multiple lanes. These form technical replicates and can be combined into the appropriate biological replicate by summing the counts, using the `collapseReplicates()` function
- The genes that have not received any reads or say below a threshold level of counts can be eliminated before analysis

```
# Collapsing the technical replicates
```

```
ddsColl.slbp.all <- collapseReplicates (ddsTx.slbp.all, ddsTx.slbp.all$Gen_Rep, ddsTx.slbp.all$Gen_R,
colData(ddsColl.slbp.all))
```

```
## DataFrame with 25 rows and 8 columns
```

```
##               Sample Genotype   Cycle Replicate
##               <factor> <factor> <factor>  <factor>
## SLBP_NCO_Pre9_R1 SLBP_NCO_Pre9_R1_B2      SLBP NCO_Pre9      R1
## SLBP_NCO_Pre9_R2 SLBP_NCO_Pre9_R2_B2      SLBP NCO_Pre9      R2
## SLBP_NCO_Pre9_R3 SLBP_NCO_Pre9_R3_B2      SLBP NCO_Pre9      R3
## SLBP_NCO_Pre9_R4 SLBP_NCO_Pre9_R4_B2      SLBP NCO_Pre9      R4
## SLBP_NCO_Pre9_R5 SLBP_NCO_Pre9_R5_B2      SLBP NCO_Pre9      R5
## ...
## WT_NC14_R1        WT_NC14_R1_B2        WT      NC14      R1
## WT_NC14_R2        WT_NC14_R2_B2        WT      NC14      R2
## WT_NC14_R3        WT_NC14_R3_B2        WT      NC14      R3
## WT_NC14_R4        WT_NC14_R4_B2        WT      NC14      R4
## WT_NC14_R5        WT_NC14_R5_B2        WT      NC15      R5
##               Gen_Rep      Gen_Rep_Batch      Gen_Cyc
##               <factor>      <factor>      <factor>
## SLBP_NCO_Pre9_R1 SLBP_NCO_Pre9_R1 SLBP_NCO_Pre9_R1_B2 SLBP_NCO_Pre9
## SLBP_NCO_Pre9_R2 SLBP_NCO_Pre9_R2 SLBP_NCO_Pre9_R2_B2 SLBP_NCO_Pre9
## SLBP_NCO_Pre9_R3 SLBP_NCO_Pre9_R3 SLBP_NCO_Pre9_R3_B2 SLBP_NCO_Pre9
## SLBP_NCO_Pre9_R4 SLBP_NCO_Pre9_R4 SLBP_NCO_Pre9_R4_B2 SLBP_NCO_Pre9
## SLBP_NCO_Pre9_R5 SLBP_NCO_Pre9_R5 SLBP_NCO_Pre9_R5_B2 SLBP_NCO_Pre9
## ...
## WT_NC14_R1        WT_NC14_R1        WT_NC14_R1_B2      WT_NC14
## WT_NC14_R2        WT_NC14_R2        WT_NC14_R2_B2      WT_NC14
## WT_NC14_R3        WT_NC14_R3        WT_NC14_R3_B2      WT_NC14
## WT_NC14_R4        WT_NC14_R4        WT_NC14_R4_B2      WT_NC14
## WT_NC14_R5        WT_NC14_R5        WT_NC14_R5_B2      WT_NC14
##               runsCollapsed
##               <character>
## SLBP_NCO_Pre9_R1 SLBP_NCO_Pre9_R1_B2
## SLBP_NCO_Pre9_R2 SLBP_NCO_Pre9_R2_B2
## SLBP_NCO_Pre9_R3 SLBP_NCO_Pre9_R3_B2
## SLBP_NCO_Pre9_R4 SLBP_NCO_Pre9_R4_B2
## SLBP_NCO_Pre9_R5 SLBP_NCO_Pre9_R5_B2
## ...
## WT_NC14_R1        WT_NC14_R1_B2
## WT_NC14_R2        WT_NC14_R2_B2
## WT_NC14_R3        WT_NC14_R3_B2
## WT_NC14_R4        WT_NC14_R4_B2
## WT_NC14_R5        WT_NC14_R5_B2
```

```
# Retaining a gene if it has over 1 reads in 2 or more samples
```

```
# This is a very permissive threshold to eliminate any unintentional filtration bias
```

```
ddsColl.slbp.all
```

```
## class: DESeqDataSet
```

```
## dim: 13728 25
```

```
## metadata(1): version
```

```
## assays(2): counts avgTxLength
```

```
## rownames(13728): dmel_1-Dec dmel_1-Sep ... dmel_zye dmel_Zyx
## rowData names(0):
## colnames(25): SLBP_NCO_Pre9_R1 SLBP_NCO_Pre9_R2 ... WT_NC14_R4
##   WT_NC14_R5
## colData names(8): Sample Genotype ... Gen_Cyc runsCollapsed
```

```
keep.slbp.all <- rowSums(counts(ddsColl.slbp.all) >1) >= 2
ddsColl.keep.slbp.all <- ddsColl.slbp.all[keep.slbp.all,]
ddsColl.keep.slbp.all # 10860 genes
```

```
## class: DESeqDataSet
## dim: 10860 25
## metadata(1): version
## assays(2): counts avgTxLength
## rownames(10860): dmel_1-Dec dmel_1-Sep ... dmel_zye dmel_Zyx
## rowData names(0):
## colnames(25): SLBP_NCO_Pre9_R1 SLBP_NCO_Pre9_R2 ... WT_NC14_R4
##   WT_NC14_R5
## colData names(8): Sample Genotype ... Gen_Cyc runsCollapsed
```

Perform the DESeq2 normalization followed by

- regularized log transformation
- similarity between samples based on Euclidean distance
- principal components analysis (PCA)

```
deseq.slbp.all <- DESeq(ddsColl.keep.slbp.all)
```

```
## estimating size factors
```

```
## using 'avgTxLength' from assays(dds), correcting for library size
```

```
## estimating dispersions
```

```
## gene-wise dispersion estimates
```


```
## mean-dispersion relationship
```

```
## final dispersion estimates
```

```
## fitting model and testing
```

```
hist(normalizationFactors(deseq.slbp.all))
```

Histogram of normalizationFactors(deseq.slbp.all)

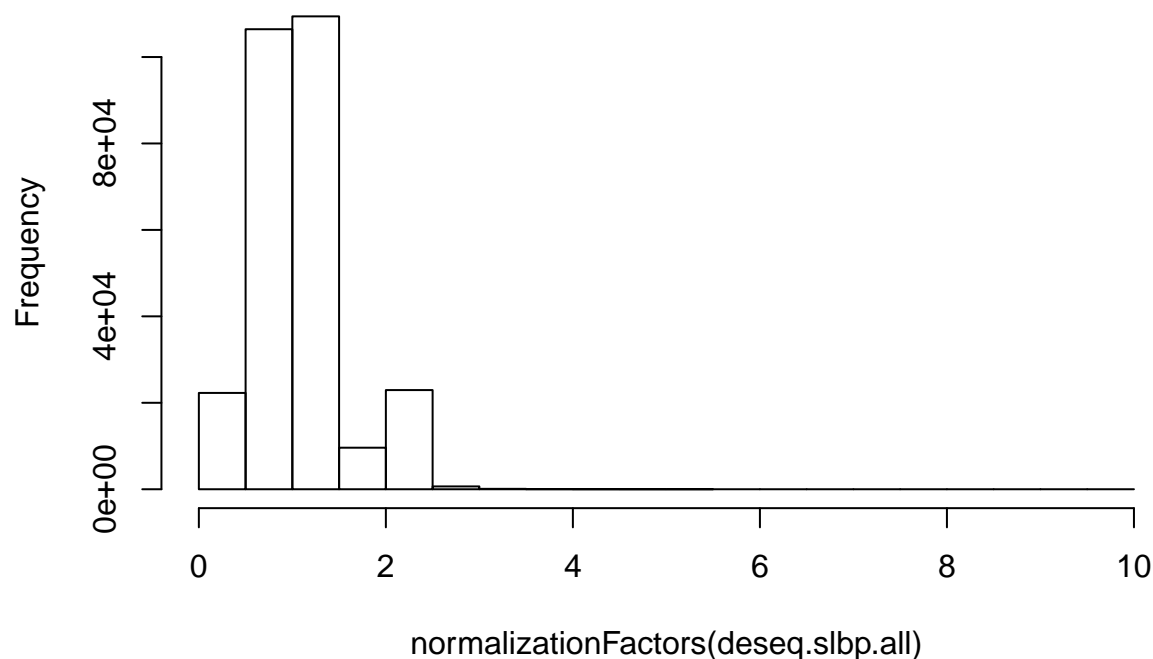


```
# histogram of normalization factors typically distributed with a mean/ median ~1.0
rld.slbp.all <- rlog(deseq.slbp.all, blind=T)


sampleDists.slbp.all <- dist(t(assay(rld.slbp.all)))
hm.mat.slbp.all <- as.matrix( sampleDists.slbp.all)
colors <- colorRampPalette( rev(brewer.pal(9, "Blues")) )(255)

# heierarchical clustering of the sample distances
hm.col.clust.slbp.all <- hclust(dist(t(hm.mat.slbp.all)))
sort.hclust <- function(...) as.hclust(dendsort(as.dendrogram(...)))
hm.col.clust.slbp.all <- sort.hclust(hclust(dist(t(hm.mat.slbp.all))))
hm.row.clust.slbp.all <- sort.hclust(hclust(dist(hm.mat.slbp.all)))

#visualizing the clustered sample distances
pheatmap(
  mat           = hm.mat.slbp.all,
  color         = colors,
  cluster_cols  = hm.col.clust.slbp.all,
  cluster_rows  = hm.row.clust.slbp.all,
  show_rownames = T
)
```

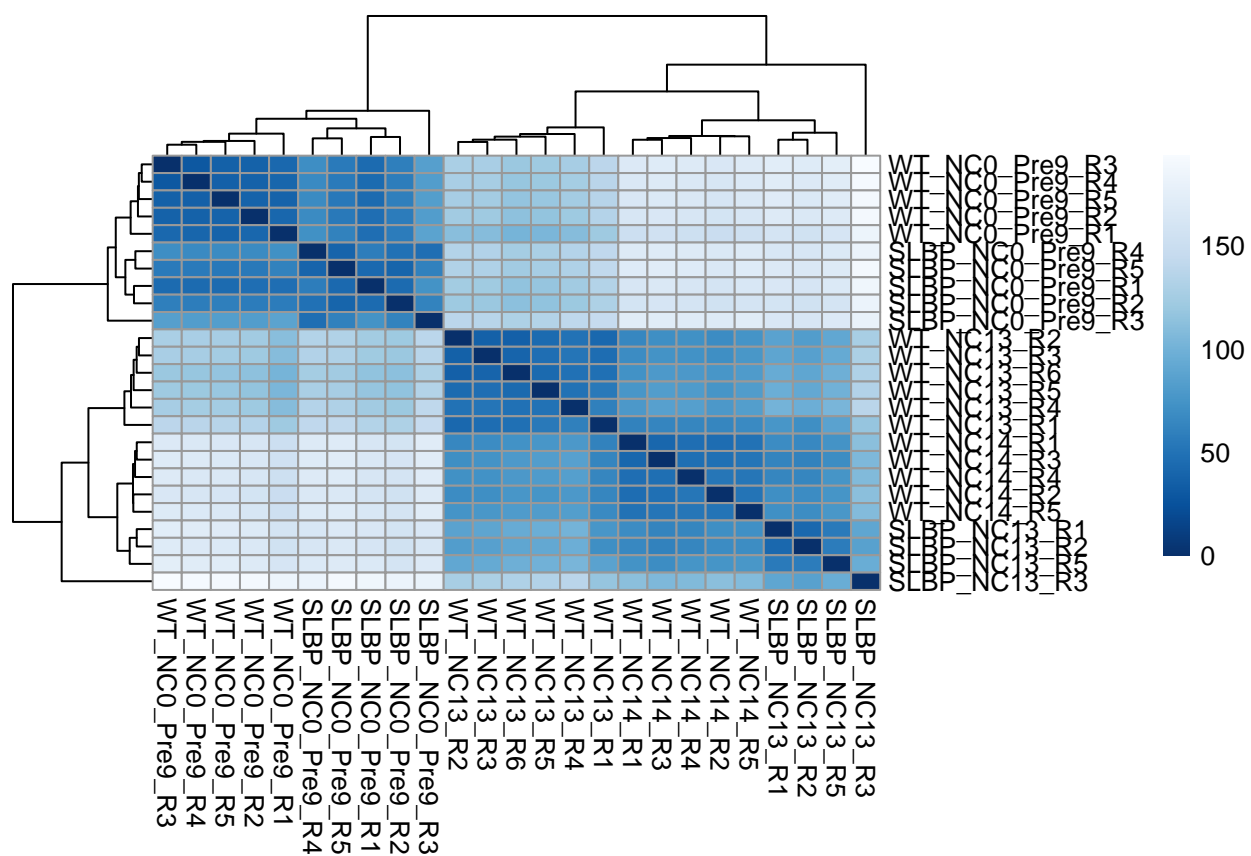

```
#plotting PCA
plotPCA(rld.slbp.all, intgroup=c("Gen_Cyc"),ntop=5000)
```

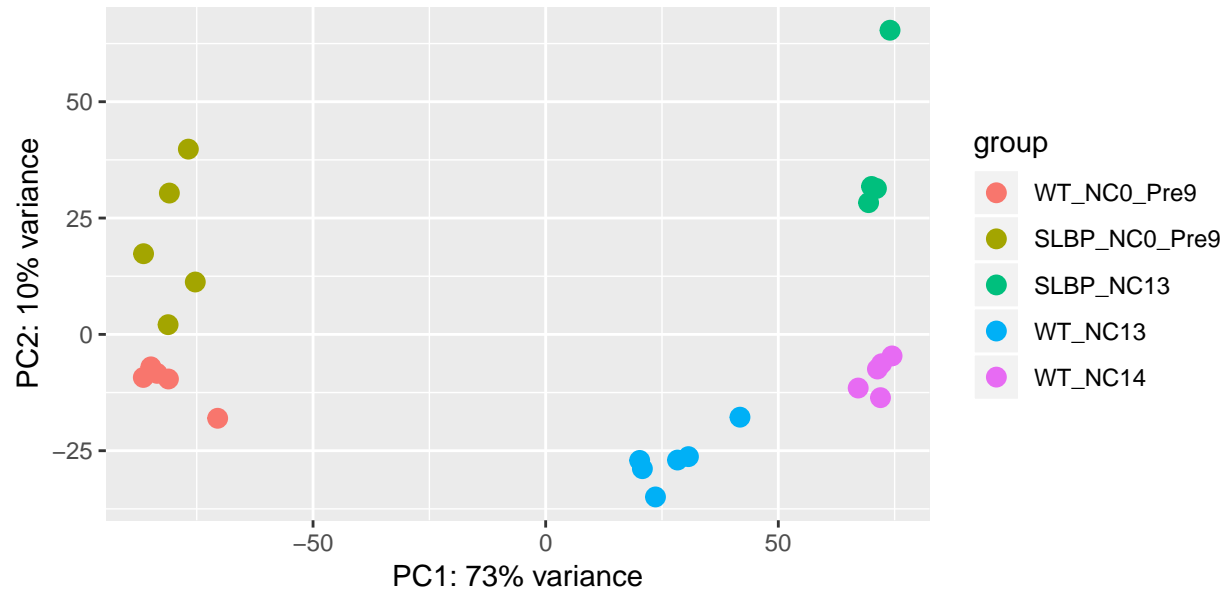

The Euclidean distance based similarity of expression data for WT and Slbp embryos at different time-points demonstrate that replicates are more similar to each other than they are to other genotypes and/ or timepoints

Principal Components Analysis of Slbp and WT expression data also shows that global transcriptomic profile is shifted in Slbp NC13 as compared WT NC13 and is more similar to WT NC14 indicating that the onset of transcription is advanced in Slbp embryos