


Peer Evaluation System UI/UX


Screenshots of the UI/UX design: -


• The changes from the today's code are reflected below: -

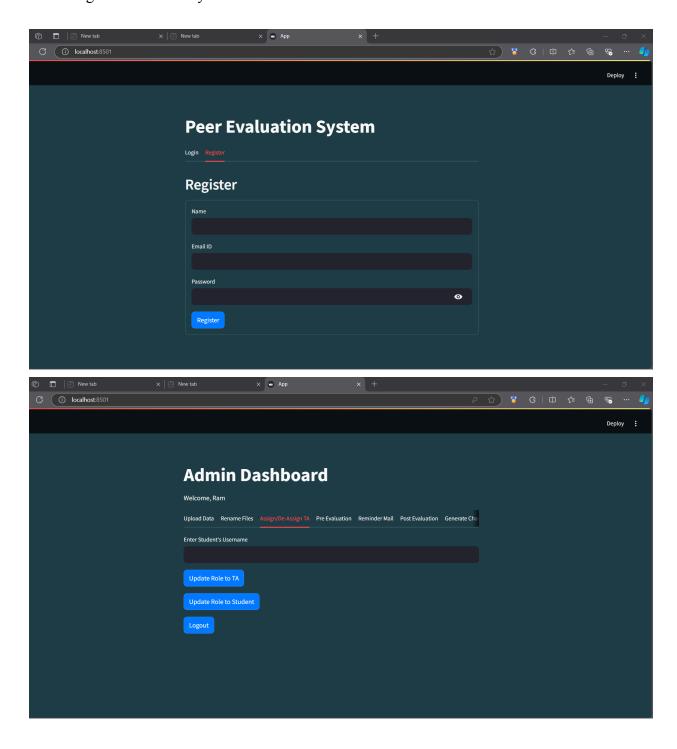

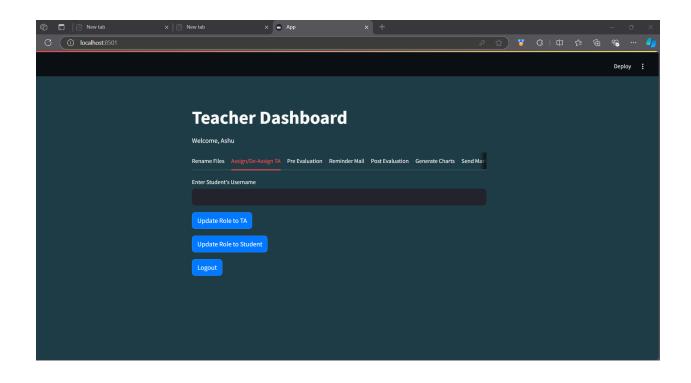

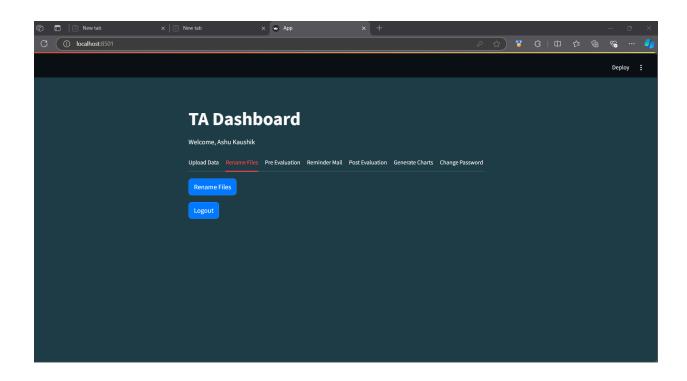

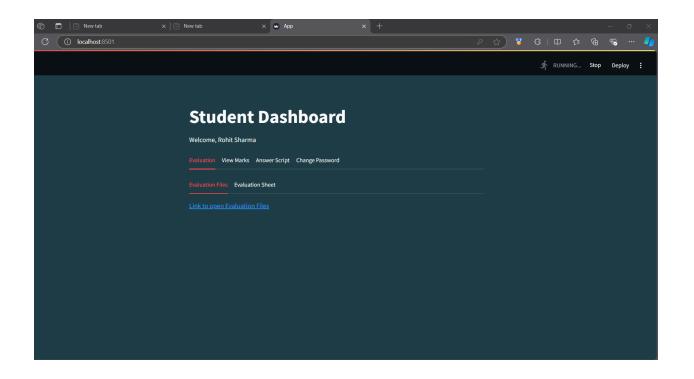

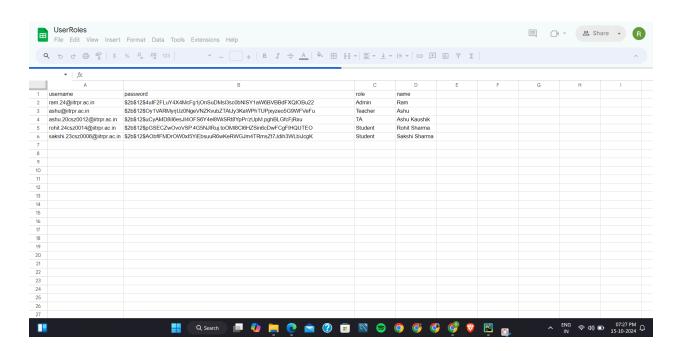

Python Code: -

1. App.py -

```
import io
import re
import random
import smtplib
import time
import ison
import bcrypt
import gspread
import requests
import streamlit as st
import plotly.express as px
import pandas as pd
from Rename File import process pdfs in folder #process signatures,
load stored signatures
from googleapiclient.discovery import build
from googleapiclient.http import MediaIoBaseUpload
from googleapiclient.http import MediaIoBaseDownload
from oauth2client.service account import ServiceAccountCredentials
from email.mime.text import MIMEText
# Google Sheets and Google Drive setup
SCOPE = [
 "https://spreadsheets.google.com/feeds",
 "https://www.googleapis.com/auth/drive"
CREDENTIALS FILE = "peer-evaluation-sem1-e2fcf8b5fc27.json"
SHEET NAME = "UserRoles"
# Initialize connection to Google Sheets
def connect to google sheets():
 creds = ServiceAccountCredentials.from json keyfile name(CREDENTIALS FILE,
SCOPE)
 client = gspread.authorize(creds)
 sheet = client.open(SHEET NAME).sheet1
 return sheet
```

```
# Google Drive authentication
def authenticate drive():
 creds = ServiceAccountCredentials.from json keyfile name(CREDENTIALS FILE,
SCOPE)
 service = build('drive', 'v3', credentials=creds)
 return service
# Fetch users from Google Sheets
def get users from sheets():
 sheet = connect to google sheets()
 records = sheet.get all records()
 return records
# Function to generate a random 6-digit OTP
def generate otp():
 return str(random.randint(100000, 999999))
# Function to send OTP to email
def send otp email(otp, recipient email):
 sender email = "your-email@gmail.com" # Replace with your email
 sender password = "your-email-password" # Replace with your email password or
app-specific password
 # Create the email content
 message = MIMEText(f"Dear User,\n\n Your Registration OTP is: {otp}")
 message["Subject"] = "OTP for Registration"
 message["From"] = sender email
 message["To"] = recipient email
 try:
    # Connect to SMTP server and send email
    server = smtplib.SMTP SSL("smtp.gmail.com", 465)
    server.login(sender email, sender password)
    server.sendmail(sender email, recipient email, message.as string())
    server.quit()
    return True
```

```
except Exception as e:
    print(f"Error sending OTP email: {e}")
    return False
def validate password(password):
 pattern =
re.compile(r' \land (?=.*[A-Z])(?=.*[a-z])(?=.* \land d)(?=.*[a.$!\%*?\&])[A-Za-z \land da.$!\%*?\&]{8,}
 return pattern.match(password)
# Add new user to Google Sheets with role auto-assignment
def register user(username, password, name):
 sheet = connect to google sheets()
 # Check if the email contains numeric values (assumed to be student)
 if re.search(r'\d', username):
    role = "Student"
 else:
    role = "Teacher"
 # Hash the password before saving
 hashed password = bcrypt.hashpw(password.encode('utf-8'), bcrypt.gensalt())
 new user = [username, hashed password.decode('utf-8'), role, name]
 #new user = [username, password, role, name]
 sheet.append row(new user)
 return role
# Update role from Student to TA (only for Teachers)
def update role to ta(username):
 sheet = connect to google sheets()
 records = sheet.get all records()
 for i, user in enumerate(records, start=2): # start=2 to account for 1-based index in
Google Sheets
    if user['username'] == username and user['role'] == 'Student':
      sheet.update cell(i, 3, 'TA') # Assuming role is in column 3
      return True
```

```
# Update role from TA to Student (only for Teachers)
def update role to Student(username):
 sheet = connect to google sheets()
 records = sheet.get all records()
 for i, user in enumerate(records, start=2): # start=2 to account for 1-based index in
Google Sheets
    if user['username'] == username and user['role'] == 'TA':
       sheet.update cell(i, 3, 'Student') # Assuming role is in column 3
      return True
 return False
# Verify user credentials
def login(username, password, users):
 for user in users:
    if user['username'] == username:
      # Check if the password matches the stored hash
      if bcrypt.checkpw(password.encode('utf-8'), user['password'].encode('utf-8')):
         st.session state["login status"] = True
         st.session state["role"] = user["role"]
         st.session state["username"] = username
         st.session state["page"] = "dashboard"
         st.session state["message"] = None
         st.session state["name"] = user["name"]
         return
       else:
         st.error("Incorrect Password!")
         time.sleep(2)
         st.rerun()
         return
 st.error("Incorrect Username or Password!")
 time.sleep(2)
 st.rerun()
# Logout function
def logout():
```

```
st.session state["login status"] = False
 st.session state["role"] = None
 st.session state["username"] = None
 st.session state["name"] = None
 st.session state["page"] = "login"
 st.success("Logging out!")
 time.sleep(0.5)
 #st.session state["message"] = "Logged out successfully"
# Function to change password
def change password(username, current password, new password):
 sheet = connect to google sheets()
 records = sheet.get all records()
 # Find the user in the records
 for i, user in enumerate(records, start=2): # start=2 for 1-based indexing (Google
Sheets)
    if user['username'] == username:
      # Check if the current password matches the stored hash
      if bcrypt.checkpw(current password.encode('utf-8'),
user['password'].encode('utf-8')):
        # Hash the new password
        hashed new password = bcrypt.hashpw(new password.encode('utf-8'),
bcrypt.gensalt()).decode('utf-8')
        # Update the password in the sheet
         sheet.update cell(i, 2, hashed new password)
        return True # Password changed successfully
      else:
         return False # Current password is incorrect
 return False # User not found
def change password dashboard():
 st.header("Change Password")
 current password = st.text input("Current Password", type="password")
 new password = st.text input("New Password", type="password")
 confirm password = st.text input("Confirm New Password", type="password")
```

```
if st.button("Change Password"):
   if new password != confirm password:
      st.error("New password and confirm password do not match!")
   elif not validate password(new password):
      st.error(
        "Password must include at least: - \n1. One uppercase letter. \n2. One lowercase
letter. \n3. One special character. \n4. One numerical digit. \n5. Must be at least 8
characters long.")
   else:
      success = change password(st.session state['username'], current password,
new password)
      if success:
        st.success("Password changed successfully!")
        time.sleep(2)
        logout()
        st.rerun()
      else:
        st.error("Failed to change password. Incorrect current password.")
def trigger google apps script(function name):
 #web app url =
"https://script.google.com/macros/s/AKfycbwlBil062YhNYcbIqmP9obfLBKgoeIdTdRD
Q BOB4rF1S6JhTxvVFH8MhW2x84bgyAVag/exec" # Replace with your web app
URL
 #web app url =
"https://script.google.com/macros/s/AKfycbwyD-ImNegaa7NzPCU5AZ6978PSRvQuuy
EreskmCnrzoM0P30EGHuR-sIogklHBHlNlxQ/exec"
 web app url =
"https://script.google.com/macros/s/AKfycbyyeKLZfm5VihTXPqu5qloIl2CEs8mRU3iJu
epZJ4AvWm3R0w3yWBG8INj9v2-TUeGk3w/exec"
 #web app url =
"https://script.google.com/macros/s/AKfycbwBrsqBz4 d-muszL1oclHczAqQtpddtmzRc
ZPtV9NVXZuS0t-18kWYfUT-F3W728A-AA/exec"
 #web app url =
"https://script.google.com/macros/s/AKfycbwBrsqBz4 d-muszL1oclHczAqQtpddtmzRc
ZPtV9NVXZuS0t-18kWYfUT-F3W728A-AA/exec"
 url = f"{web app url}?action={function name}" # Append the function name as the
'action' parameter
```

```
try:
    response = requests.get(url)
    if response.status code == 200:
       st.success(f"{function name} executed successfully!")
      st.error(f"Failed to execute {function name}. Status code:
{response.status code}")
 except Exception as e:
    st.error(f"An error occurred: {str(e)}")
# Function to check if a file already exists in Google Drive folder
def file exists(drive service, folder id, file name):
 query = f'''{folder id}' in parents and name='{file name}'''
 results = drive service.files().list(q=query, spaces='drive', fields='files(id,
name)').execute()
 files = results.get('files', [])
 return any(file['name'] == file name for file in files)
# Function to upload PDF files to Google Drive
def upload pdfs(uploaded files, folder id):
 drive service = authenticate drive()
 count = 0
 for uploaded file in uploaded files:
    if file exists(drive service, folder id, uploaded file.name):
       #st.warning(f"PDF file '{uploaded file.name}' already exists in the folder.")
       continue
    file metadata = {
      'name': uploaded file.name,
       'parents': [folder id]
    media = MediaIoBaseUpload(uploaded file, mimetype='application/pdf')
    drive service.files().create(body=file metadata, media body=media,
fields='id').execute()
    count = count + 1
    #st.session state["success message"] = f"Uploaded PDF file '{uploaded file.name}'
to Google Drive"
```

```
st.success(f" The {count} files are uploaded to the Google Drive.")
# Function to upload Google Sheets files to Google Drive
def upload sheets(uploaded file, folder id):
 drive service = authenticate drive()
 if file exists(drive service, folder id, uploaded file.name):
    st.warning(f"Google Sheet file '{uploaded file.name}' already exists in the folder.")
    return
 file metadata = {
    'name': uploaded file.name,
    'parents': [folder id]
 }
 # Upload the file to Google Drive
 media = MediaIoBaseUpload(uploaded file, mimetype=uploaded file.type,
resumable=True)
 uploaded = drive service.files().create(body=file metadata, media body=media,
fields='id').execute()
 st.success("The Excel sheet has been uploaded to the Google Drive.")
# Helper function to connect to a specific Google Sheet
def connect to google sheets with name(sheet name):
 creds = ServiceAccountCredentials.from json keyfile name(CREDENTIALS FILE,
SCOPE)
 client = gspread.authorize(creds)
 sheet = client.open(sheet name)
 return sheet
def connect to google sheets with id(file id):
 creds = ServiceAccountCredentials.from json keyfile name(CREDENTIALS FILE,
SCOPE)
 client = gspread.authorize(creds)
 sheet = client.open by key(file id)
 return sheet
```

```
def get student details(username):
 # Connect to the specific Google Sheet containing details
 sheet name = "UI/UX Copy of Peer Evaluation2"
 sheet = connect to google sheets with name(sheet name) # Modify to accept a sheet
name
 peer eval sheet = sheet.worksheet('PeerEval') # Open the "PeerEval" sheet
 # Fetch all the data from the "PeerEval" sheet
 records = peer eval sheet.get all records()
 # Find marks for the current user
 for record in records:
    if record['EMail ID'] == username: # Ensure this matches your column name
      return record['Unique ID'], record['Assigned Folder Link'], record['Spreadsheet
Link'] # Returning the Unique id
 return None, None, None # If no details found for the user
def get student marks(username):
 # Connect to the specific Google Sheet containing marks
 sheet name = "UI/UX Copy of Peer Evaluation2"
 sheet = connect to google sheets with name(sheet name) # Modify to accept a sheet
name
 peer eval sheet = sheet.worksheet('PeerEval') # Open the "PeerEval" sheet
 # Fetch all the data from the "PeerEval" sheet
 records = peer eval sheet.get all records()
 # Check if 'Average Marks' column exists
 if not records or 'Average Marks' not in records[0]: # Checking the first row (header)
for the column
    #print("Average Marks column not found")
    return -1 # Return None if the column does not exist
 # Find marks for the current user
 for record in records:
    if record['EMail ID'] == username and record['Average Marks']: # Ensure this
matches your column name
      return record['Average Marks'] # Returning the Average Mark's
```

```
# Fetch the student's PDF from Google Drive using unique ID
def get student pdf(unique id):
 drive service = authenticate drive()
 folder id = "1fT-inciLQut85BGEQrjMSWbVRcTsdWfQ"
 query = f'''{folder id}' in parents and name contains '{unique id}'''
 results = drive service.files().list(q=query, fields="files(id, name)").execute()
 files = results.get('files', [])
 if files:
    file id = files[0]['id']
    file name = files[0]['name']
    # Download the PDF
    request = drive service.files().get media(fileId=file id)
    fh = io.BytesIO()
    downloader = MediaIoBaseDownload(fh, request)
    done = False
    while not done:
      status, done = downloader.next chunk()
    fh.seek(0)
    return fh, file name
 return None, None
def renaming files():
 folder id = '1fT-inciLQut85BGEQrjMSWbVRcTsdWfQ' # Replace with your Google
Drive folder ID
 process pdfs in folder(folder id)
 # Authenticate Google Drive
 #service = authenticate drive()
 # Google Drive folder IDs
 #stored signatures folder id = '14QLNPdIRUZ3ici-GePoEewUCmxemjhUD' #The
folder where we want to keep the Stored signature
```

```
#uploaded signatures folder id = '1ORVrU-UoXyDS-1ovyuk7FAjb p94gnsx' #This
will be the folder where our pdf files are kept
 #destination folder id = '1bPhLMZONpsPDxM9z vQD2J9jAjtwG3FG' # Folder
where renamed files will be moved
 # Load stored signatures directly from Google Drive
 #stored signatures, stored filenames = load stored signatures(service,
stored signatures folder id)
 # Process uploaded signatures and copy renamed files to the destination folder
 #matched files = process signatures(service, uploaded signatures folder id,
stored signatures, stored filenames, destination folder id)
 #print(f"Matching process completed. Total matched files: {len(matched files)}")
# Connect to Google Sheets
def fetch sheet data(sheet name, worksheet name):
 # gc = gspread.service account(filename=CREDENTIALS FILE)
 # spreadsheet = gc.open(sheet_name)
 # worksheet = spreadsheet.worksheet (worksheet name)
 # return worksheet.get all values()
 creds = ServiceAccountCredentials.from json keyfile_name(CREDENTIALS_FILE,
SCOPE) # Replace with your credentials file
 client = gspread.authorize(creds)
 sheet = client.open(sheet name).worksheet(worksheet name) # Open the specific
worksheet
 return sheet
# Fetch Peer Average and Standard Deviation data
def get peer average data(sheet):
 data = sheet.get all values()
 for index, row in enumerate(data):
    if row[0] == "Peer": # Check the first column of each row
      st idx = index
    if row[0] == "SD": # Check the first column of each row
      std idx = index
    if row[0] == "Peer Average": # Check the first column of each row
      pavg idx = index
```

```
# Extract student IDs, Standard Deviations, and Peer Averages
 student ids = data[st idx][1:] # First row has student IDs starting from B1
 std devs = list(map(float, data[std idx][1:])) # Row 6 has Standard Deviations starting
from B6
 peer averages = list(map(float, data[pavg idx][1:])) # Row 7 has Peer Averages
starting from B7
 # Create a DataFrame with relevant data
 df = pd.DataFrame({
    'Student': student ids,
    'Standard Deviation': std devs,
    'Average Score': peer averages
 })
 return df
# Generate Standard Deviation Chart
def create standard deviation chart(df):
  fig = px.bar(df, x='Student', y='Standard Deviation', title='Standard Deviation of Scores
for Each Student',
          color discrete sequence=['#4682B4'])
 fig.update layout(yaxis title='Standard Deviation', xaxis title='Student',
             plot bgcolor='white', paper bgcolor='white', # Set background colors to
white
             font color='black', title font color='black',
            xaxis=dict(title font=dict(color='black'), tickfont=dict(color='black')),
            yaxis=dict(title font=dict(color='black'),tickfont=dict(color='black'))
 return fig
# Generate Peer Average Scores Chart
def create average scores chart(df):
 fig = px.bar(df, x='Student', y='Average Score', title='Peer Average Scores for Each
Student',
          color discrete sequence=['#FF6347'])
 fig.update layout(yaxis title='Peer Average', xaxis title='Student',
```

```
plot bgcolor='white', paper bgcolor='white', # Set background colors to
white
             font color='black', title font color='black',
             xaxis=dict(title font=dict(color='black'), tickfont=dict(color='black')),
             yaxis=dict(title font=dict(color='black'), tickfont=dict(color='black'))
 return fig
# Trigger when "Generate Charts" button is clicked
def generate charts():
 sheet = fetch sheet data('UI/UX Copy of Peer Evaluation2', 'Evaluation Results')
 df = get peer average data(sheet) # Get the data
 # Display two charts
 st.plotly chart(create standard deviation chart(df))
 st.plotly chart(create average scores chart(df))
# Function to convert Excel file to Google Sheets
def convert excel to google sheet(file id):
 drive_service = authenticate drive()
 # File metadata for conversion
 file metadata = {
    'mimeType': 'application/vnd.google-apps.spreadsheet'
 }
 # Convert the file and get the new file ID
 converted file = drive service.files().copy(fileId=file id,
body=file metadata).execute()
 return converted file['id']
# Function to list all files in the given folder (Google Drive)
def list spreadsheets in folder(folder id):
 service = authenticate drive() # Authenticate Drive using the new function
 query = f'''{folder id}' in parents and
(mimeType='application/vnd.google-apps.spreadsheet' OR
mimeType='application/vnd.openxmlformats-officedocument.spreadsheetml.sheet')"
 results = service.files().list(g=query).execute()
 files = results.get('files', [])
```

```
if not files:
    print('No spreadsheets found in the folder.')
    return []
 return files
# Function to copy data from each spreadsheet to the target sheet
def copy data to peer eval(folder id, target spreadsheet name,
target worksheet name):
 # Get the target spreadsheet using the new function
 target spreadsheet = connect to google sheets with name(target spreadsheet name)
 try:
    target worksheet = target spreadsheet.worksheet(target worksheet name)
 except gspread. WorksheetNotFound:
    print(f"Worksheet '{target worksheet name}' not found in the target spreadsheet.")
    return
 # List all spreadsheets in the folder
 files = list spreadsheets in folder(folder id)
 for file in files:
    file id = file['id']
    file name = file['name']
    mime type = file['mimeType']
    print(f"Processing file: {file name}")
    # If it's an Excel file, convert it to a Google Sheet
    if mime type ==
'application/vnd.openxmlformats-officedocument.spreadsheetml.sheet':
      file id = convert excel to google sheet(file id)
    # Now open the file as a Google Sheet
    source spreadsheet = connect to google sheets with id(file id)
    source worksheet = source spreadsheet.get worksheet(0) # Assuming data is in the
first worksheet
    source data = source worksheet.get all values()
```

```
# Append data to the target worksheet
    if source data:
      target worksheet.append rows(source data, value input option="RAW")
      return
 print("Data copied to PeerEval worksheet successfully.")
def admin dashboard():
 st.title("Admin Dashboard")
 st.write(f"Welcome, {st.session state['name']}")
 # Create tabs for each action
 tab, tab0, tab1, tab2, tab3, tab4, tab5, tab6, tab7, tab8 = st.tabs(
   ["Upload Data", "Rename Files", "Assign/De-Assign TA", "Pre Evaluation",
"Reminder Mail", "Post Evaluation", "Generate Charts",
    "Send Marks", "Cumulative Score", "Change Password"])
 # Tab for File upload option
 with tab:
   # Folder ID for the Google Drive folder where the files will be saved
   folder id = "1fT-inciLQut85BGEQrjMSWbVRcTsdWfQ" # Replace this with your
folder ID
   # Allow file upload for multiple Google Sheets
   st.subheader("Upload Student Information")
   sheet files = st.file uploader("Upload Google Sheet", type=["xlsx"],
accept multiple files=False,
                      key="sheet uploader")
   if sheet files:
      upload sheets(sheet files, folder id)
   # Allow file upload for multiple PDFs
   st.subheader("Upload PDF Files")
   pdf files = st.file uploader("Upload PDF files", type=["pdf"],
accept multiple files=True, key="pdf uploader")
```

```
if pdf files:
      upload pdfs(pdf files, folder_id)
 with tab0:
   if st.button("Rename Files"):
      renaming files()
 # Tab for TA update
 with tab1:
   student username = st.text input("Enter Student's Username")
   if st.button("Update Role to TA"):
      if update role to ta(student username):
        st.success(f"{student username.split('.')[0].capitalize()}'s role updated to TA.")
      else:
        st.error("Failed to update the role. Check if the username exists and belongs to a
student.")
   if st.button("Update Role to Student"):
      if update role to Student(student username):
        st.success(f"{student username.split('.')[0].capitalize()}'s role updated to
Student.")
      else:
        st.error("Failed to update the role. Check if the username exists and belongs to a
TA.")
 # Tab for Pre Evaluation
 with tab2:
   num Questions = st.number input("Enter the number of questions", min value=1,
max value=100)
   # Button to submit the form
   if st.button("Set Parameters"):
     # Prepare the data to send
     data = {
        "num Questions": num Questions # Send `num Questions` parameter
      }
     # Google Apps Script Web App URL (replace with your actual Web App URL)
     \#url =
"https://script.google.com/macros/s/AKfycbwBrsqBz4 d-muszL1oclHczAqQtpddtmzRc
ZPtV9NVXZuS0t-18kWYfUT-F3W728A-AA/exec"
```

```
url =
"https://script.google.com/macros/s/AKfycbwBrsqBz4_d-muszL1oclHczAqQtpddtmzRc
ZPtV9NVXZuS0t-18kWYfUT-F3W728A-AA/exec"
     headers = {'Content-Type': 'application/json'}
     try:
        # Send a POST request to the Google Apps Script Web App
        response = requests.post(url, data=json.dumps(data), headers=headers)
        if response.status code == 200:
          st.success(f"Data sent successfully! Response: {response.text}")
        else:
          st.error(f"Failed to send data. Status code: {response.status code}")
     except Exception as e:
        st.error(f"Error occurred: {e}")
   target spreadsheet name = "UI/UX Copy of Peer Evaluation2"
   #target spreadsheet name = "Sample Run"
   target worksheet name = "PeerEval"
   if st.button("Data Extraction"):
     copy data to peer eval(folder id, target spreadsheet name,
target worksheet name)
   if st.button("Pre Evaluation"):
     trigger google apps script("PreEval")
 # Tab for Checking Pending Evaluations
 with tab3:
   if st.button("Reminder Mail"):
     trigger google apps script("CheckEval")
# Tab for Post Evaluation
 with tab4:
   if st.button("Post Evaluation"):
     trigger google apps script("PostEval")
# Tab for Generating Charts
 with tab5:
   if st.button("Generate Charts"):
     generate charts()
     #trigger google apps script("GenChart")
```

```
# Tab for Sending Marks
 with tab6.
   if st.button("Send Marks"):
      trigger google apps script("SendMail")
 with tab7:
   if st.button("Send Cumulative Score"):
      trigger google apps script("SendFinalM")
 with tab8:
   change password dashboard()
def teacher dashboard():
 st.title("Teacher Dashboard")
 #var user = st.session state['username'].split('@')[0]
 #if'.' in var user:
 # st.write(f"Welcome, Dr. {var user.split('.')[0].capitalize()}")
 #else
 # st.write(f"Welcome, Dr. {var user.capitalize()}")
 st.write(f"Welcome, {st.session state['name']}")
 # Create tabs for each action
 tab, tab0, tab1, tab2, tab3, tab4, tab5, tab6, tab7 = st.tabs(["Rename Files",
"Assign/De-Assign TA", "Pre Evaluation", "Reminder Mail",
                             "Post Evaluation", "Generate Charts", "Send Marks",
"Cumulative Score", "Change Password"])
 # Tab for TA update
 with tab:
    if st.button("Rename Files"):
      renaming files()
 with tab0:
    student username = st.text input("Enter Student's Username")
    if st.button("Update Role to TA"):
      if update role to ta(student username):
         st.success(f"{student username.split('.')[0].capitalize()}'s role updated to TA.")
      else:
         st.error("Failed to update the role. Check if the username exists and belongs to a
student.")
```

```
if st.button("Update Role to Student"):
      if update role to Student(student username):
        st.success(f"{student username.split('.')[0].capitalize()}'s role updated to
Student.")
      else:
        st.error("Failed to update the role. Check if the username exists and belongs to a
TA.")
 # Tab for Pre Evaluation
 with tab1:
    num Questions = st.number input("Enter the number of questions", min value=1,
max value=100)
    # Button to submit the form
    if st.button("Set Parameters"):
      # Prepare the data to send
      data = {
         "num Questions": num Questions # Send `num Questions` parameter
      }
      # Google Apps Script Web App URL (replace with your actual Web App URL)
      # url =
"https://script.google.com/macros/s/AKfycbwBrsqBz4 d-muszL1oclHczAqQtpddtmzRc
ZPtV9NVXZuS0t-18kWYfUT-F3W728A-AA/exec"
      url =
"https://script.google.com/macros/s/AKfycbwBrsqBz4 d-muszL1oclHczAqQtpddtmzRc
ZPtV9NVXZuS0t-18kWYfUT-F3W728A-AA/exec"
      headers = {'Content-Type': 'application/json'}
      try:
        # Send a POST request to the Google Apps Script Web App
        response = requests.post(url, data=json.dumps(data), headers=headers)
        if response.status code == 200:
           st.success(f"Data sent successfully! Response: {response.text}")
        else:
           st.error(f"Failed to send data. Status code: {response.status code}")
      except Exception as e:
        st.error(f"Error occurred: {e}")
    folder id = "1fT-inciLQut85BGEQrjMSWbVRcTsdWfQ"
```

```
target spreadsheet name = "UI/UX Copy of Peer Evaluation2"
    #target spreadsheet name = "Sample Run"
    target worksheet name = "PeerEval"
    if st.button("Data Extraction"):
      copy data to peer eval(folder id, target spreadsheet name,
target worksheet name)
    if st.button("Pre Evaluation"):
      #copy data to peer eval(folder id, target spreadsheet name,
target worksheet name)
      trigger google apps script("PreEval")
 # Tab for Checking Pending Evaluations
 with tab2:
    if st.button("Reminder Mail"):
      trigger google apps script("CheckEval")
 # Tab for Post Evaluation
 with tab3:
    if st.button("Post Evaluation"):
      trigger google apps script("PostEval")
 # Tab for Generating Charts
 with tab4:
    if st.button("Generate Charts"):
      generate charts()
      #trigger google apps script("GenChart")
 with tab5:
    if st.button("Send Marks"):
      trigger google apps script("SendMail")
 with tab6:
    if st.button("Send Cumulative Score"):
      trigger google apps script("SendFinalM")
 with tab7:
    change password dashboard()
```

Role-based content: Teacher Dashboard with multiple file uploads

```
def ta dashboard():
 st.title("TA Dashboard")
 #st.write(f"Welcome, {st.session state['username'].split('.')[0].capitalize()}")
 st.write(f"Welcome, {st.session state['name']}")
 # Create tabs for each action
 tab, tab0, tab1, tab2, tab3, tab4, tab5 = st.tabs(
    ["Upload Data", "Rename Files", "Pre Evaluation", "Reminder Mail", "Post
Evaluation", "Generate Charts", "Change Password"])
 # Tab for File upload option
 with tab:
    # Folder ID for the Google Drive folder where the files will be saved
    folder id = "1fT-inciLQut85BGEQrjMSWbVRcTsdWfQ" # Replace this with your
folder ID
    # Allow file upload for multiple Google Sheets
    st.subheader("Upload Student Information")
    sheet files = st.file uploader("Upload Google Sheet", type=["xlsx"],
accept multiple files=False,
                       key="sheet uploader")
    if sheet files:
      upload sheets(sheet files, folder id)
    # Allow file upload for multiple PDFs
    st.subheader("Upload PDF Files")
    pdf files = st.file uploader("Upload PDF files", type=["pdf"],
accept multiple files=True, key="pdf uploader")
    if pdf files:
      upload pdfs(pdf files, folder id)
 with tab0:
    if st.button("Rename Files"):
      renaming files()
 # Tab for Pre Evaluation
 with tab1:
```

```
target spreadsheet name = "UI/UX Copy of Peer Evaluation2"
    #target spreadsheet name = "Sample Run"
    target worksheet name = "PeerEval"
    if st.button("Pre Evaluation"):
      copy data to peer eval(folder id, target spreadsheet name,
target worksheet name)
      trigger google apps script("PreEval")
 # Tab for Checking Pending Evaluations
 with tab2:
    if st.button("Reminder Mail"):
      trigger google apps script("CheckEval")
 # Tab for Post Evaluation
 with tab3:
    if st.button("Post Evaluation"):
      trigger google apps script("PostEval")
 # Tab for Generating Charts
 with tab4:
    if st.button("Generate Charts"):
      generate charts()
      #trigger google apps script("GenChart")
 with tab5:
    change password dashboard()
def student dashboard():
 st.title("Student Dashboard")
 #st.write(f"Welcome, {st.session state['username'].split('.')[0].capitalize()}")
 st.write(f"Welcome, {st.session state['name']}")
 # Creating tabs
 tab1, tab2, tab3, tab4 = st.tabs(["Evaluation", "View Marks", "Answer Script", "Change
Password"])
 # Tab for opening the peer evaluation spreadsheet
```

```
with tab1:
    if st.session state["username"]:
      # Fetch unique ID, and spreadsheet link using the session's username
       unique id, folder link, sheet link =
get student details(st.session state["username"])
    else:
       st.error("Username is Incorrect!")
    t1, t2 = st.tabs(["Evaluation Files", "Evaluation Sheet"])
    with t1:
      if folder link:
         st.markdown(f"[Link to open Evaluation Files]({folder link})",
unsafe allow html=True)
      else:
         st.error("Folder link not found,")
    with t2:
      if sheet link:
         st.markdown(f"[Link to open Evaluation Sheet]({sheet link})",
unsafe allow html=True)
      else:
         st.error("Spreadsheet link not found.")
 # Tab for viewing marks
 with tab2:
    if st.button("See Marks"):
      #Fetch Marks
      marks = get student marks(st.session state["username"])
      if marks and unique id and marks != -1:
         st.write(f"Your evaluation marks are = {marks}")
       elif marks == -1:
         st.error("Marks are not released yet!")
       else:
         st.error("No marks are available!")
 # Tab for downloading PDF
 with tab3:
    pdf file, file name = get student pdf(unique id)
    if pdf file:
      st.download button(
         label="Download your Evaluation PDF",
```

```
data=pdf file,
         file name=file name,
         mime='application/pdf'
      )
    else:
       st.error("PDF not found.")
 with tab4:
    change password dashboard()
# Main Streamlit app
def main():
 # Initialize session state variables if not present
 if "login status" not in st.session state:
    st.session state["login status"] = False
 if "role" not in st.session state:
    st.session state["role"] = None
 if "username" not in st.session state:
    st.session state["username"] = None
 if "page" not in st.session state:
    st.session state["page"] = "login"
 if "message" not in st.session state:
    st.session state["message"] = None
 if "success message" not in st.session state:
    st.session state["success message"] = None
 if "name" not in st.session state:
    st.session state["name"] = None
 # Set background color and input field styling using HTML
 st.markdown(
    ,,,,,,
    <style>
    .stApp {
      background-color: #1f3f49; /* Light blue background */
    .stTextInput>div>input, .stPasswordInput>div>input {
```

```
background-color: white; /* White background for text and password inputs */
     color: black; /* Text color for input fields */
  .stButton>button {
     background-color: #007bff; /* Optional: Style buttons with a color */
     color: white;
  }
  </style>
  unsafe allow html=True
# Page routing based on session state
if st.session state["page"] == "login":
  st.title("Peer Evaluation System")
  # Tabs for Login and Registration
  tab1, tab2 = st.tabs(["Login", "Register"])
  with tab1:
     st.header("Login")
     with st.form(key='login form'):
       username = st.text input("Email ID")
       password = st.text_input("Password", type="password")
       submit button = st.form submit button("Login")
       if submit button:
          users = get users from sheets()
          login(username, password, users)
         if st.session state["login status"]:
            st.rerun()
  with tab2:
     st.header("Register")
     if "otp sent" not in st.session state:
       st.session state["otp sent"] = False # Flag to track if OTP is sent
    if "otp verified" not in st.session state:
       st.session state["otp verified"] = False # Flag to track if OTP is verified
```

```
with st.form(key='register form'):
         reg name = st.text input("Name", key='reg name')
         reg username = st.text input("Email ID", key='reg username')
         reg password = st.text input("Password", type="password",
key='reg password')
         register button = st.form submit button("Register")
         if register button:
           if not reg_username.endswith("@iitrpr.ac.in"):
              st.error("Email ID must end with @iitrpr.ac.in")
           elif not validate password(reg password):
              st.error("Password must include at least One: - \n1. Uppercase letter. \n2.
Lowercase letter. \n3. Special character. \n4. Numerical digit. \n5. Must be at least 8
characters long.")
           else:
              users = get users from sheets()
              if any(user['username'] == reg_username for user in users):
                st.error("Username already exists")
              else:
                role = register user(reg username, reg password, reg name)
                st.success(f"User registered successfully with role: {role}")
                time.sleep(2)
                # Redirect to the login page
                st.session state["page"] = "login"
                st.rerun()
 elif st.session state["page"] == "dashboard":
    if st.session state["role"] == "Admin":
      admin dashboard()
    elif st.session state["role"] == "Teacher":
       teacher dashboard()
    elif st.session state["role"] == "TA":
       ta dashboard()
    elif st.session state["role"] == "Student":
       student dashboard()
```

```
if st.button("Logout"):
    logout()
    st.rerun()

if __name__ == "__main__":
    main()
```

2. Rename File.py -

```
from pdf2image import convert from bytes
from PIL import Image
import pytesseract
import re
import io
from googleapiclient.discovery import build
from google.oauth2.service account import Credentials
from googleapiclient.http import MediaIoBaseDownload, MediaIoBaseUpload
SCOPE = [
 "https://www.googleapis.com/auth/drive",
 "https://www.googleapis.com/auth/spreadsheets",
CREDENTIALS FILE = "peer-evaluation-sem1-e2fcf8b5fc27.json"
# Authenticate Google Drive
def authenticate drive():
 creds = Credentials.from service account file(CREDENTIALS FILE,
scopes=SCOPE)
 service = build('drive', 'v3', credentials=creds)
 return service
# Crop the top left corner of the image
def crop top left(image, crop width, crop height):
 left = 0
 top = 0
 right = crop width
 bottom = crop height
 return image.crop((left, top, right, bottom))
# Get PDF content from Google Drive without downloading
def get pdf from drive(service, file id):
 request = service.files().get media(fileId=file id)
 pdf content = io.BytesIO()
 downloader = MediaIoBaseDownload(pdf content, request)
 done = False
 while not done:
```

```
status, done = downloader.next chunk()
    print(f"Download {int(status.progress() * 100)}%.")
 pdf content.seek(0) # Move to the beginning of the stream
 return pdf content
# Extract name from the top-left corner of the first page
def name extraction(service, folder id, file id, pdf filename):
 try:
    pdf content = get pdf from drive(service, file id)
    images = convert from bytes(pdf content.read())
    print(f"Successfully converted PDF to images. Number of pages: {len(images)}")
 except Exception as e:
    print(f"Error converting PDF to images: {e}")
    return
 if not images:
    raise Exception("Failed to convert PDF to images")
 image = images[0] # Only the first page is processed
 crop width = int(image.width * 0.2)
 crop height = int(image.height * 0.1)
 cropped image = crop top left(image, crop width, crop height)
 recognised text = pytesseract.image to string(cropped image, config='--psm 6')
 extracted name = re.findall(r'\b\d{3}\b', recognised text)
 text = "".join(extracted name)
 if text:
    new pdf filename = f"{text}.pdf"
    print("Extracted name for renaming:", new pdf filename)
 else:
    print("No valid name extracted, keeping the original filename.")
    new pdf filename = pdf filename
 # Re-upload the renamed PDF to Google Drive
 upload pdf(service, folder id, pdf content, new pdf filename)
```

```
# Delete the original PDF file
 delete pdf(service, file id)
# Upload the renamed file back to Google Drive without saving it locally
def upload pdf(service, folder id, pdf content, new filename):
 pdf content.seek(0) # Reset the stream position before uploading
 file metadata = {
    'name': new filename,
    'parents': [folder id]
 }
 media = MediaIoBaseUpload(pdf content, mimetype='application/pdf')
 file = service.files().create(body=file metadata, media body=media,
fields='id').execute()
 print(f"Uploaded renamed file as {new filename}. File ID: {file.get('id')}")
# Function to delete the original PDF file
def delete pdf(service, file id):
 try:
    service.files().delete(fileId=file id).execute()
    print(f"Deleted original PDF file with ID: {file id}")
 except Exception as e:
    print(f"Error deleting file: {e}")
# Main function to process PDFs in the Google Drive folder
def process pdfs in folder(folder id):
 service = authenticate drive()
 # List PDF files in the folder
 query = f'''{folder id}' in parents and mimeType='application/pdf''
 results = service.files().list(q=query, fields="files(id, name)").execute()
 files = results.get('files', [])
 if not files:
    raise Exception("No PDF files found in the specified folder")
 # Process each PDF file
 for file in files:
    file id = file['id']
    pdf filename = file['name']
    print(f"Processing file: {pdf filename}")
```

name_extraction(service, folder_id, file_id, pdf_filename)