mahindragto-nashik-chatbot Scan Report

Project Name	mahindragto-nashik-chatbot
Scan Start	Monday, November 2, 2026 2:48:06 PM
Preset	Checkmarx Default
Scan Time	00h:05m:24s
Lines Of Code Scanned	164954
Files Scanned	341
Report Creation Time	Wednesday, November 4, 2026 7:01:13 AM
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818
Team	CxServer
Checkmarx Version	9.7.4.1001 HF5
Scan Type	Full
Source Origin	LocalPath
Density	1/1000 (Vulnerabilities/LOC)
Visibility	Public

Filter Settings

Severity

Included: Critical, High, Medium, Low, Information

Excluded: None

Result State

Included: To Verify, Confirmed, Urgent, Proposed Not Exploitable

Excluded: Not Exploitable

Assigned to

Included: All

Categories

Included:

Uncategorized	All
OWASP Top 10 2013	All
FISMA 2014	All
NIST SP 800-53	All
OWASP Top 10 2017	All
OWASP Mobile Top 10 2016	All
OWASP Top 10 API	All
OWASP Top 10 2010	All
ASD STIG 4.10	All
Custom	All
CWE top 25	All
MOIS(KISA) Secure Coding 2021	All
OWASP ASVS	All

OWASP Top 10 2021	All
PCI DSS v3.2.1	All
SANS top 25	All
ASA Mobile Premium	All
ASA Premium	All
Top Tier	All
PCI DSS v4.0	All
Base Preset	All
OWASP Top 10 API 2023	All
ASD STIG 6.1	All
OWASP Mobile Top 10 2024	All

Excluded:

Uncategorized	None
OWASP Top 10 2013	None
FISMA 2014	None
NIST SP 800-53	None
OWASP Top 10 2017	None
OWASP Mobile Top 10 2016	None
OWASP Top 10 API	None
OWASP Top 10 2010	None
ASD STIG 4.10	None
Custom	None
CWE top 25	None
MOIS(KISA) Secure Coding 2021	None
OWASP ASVS	None
OWASP Top 10 2021	None
PCI DSS v3.2.1	None
SANS top 25	None
ASA Mobile Premium	None
ASA Premium	None
Top Tier	None
PCI DSS v4.0	None

Base Preset	None
OWASP Top 10 API 2023	None
ASD STIG 6.1	None
OWASP Mobile Top 10 2024	None


Results Limit

Results limit per query was set to 500


Selected Queries

Selected queries are listed in Result Summary


Result Summary

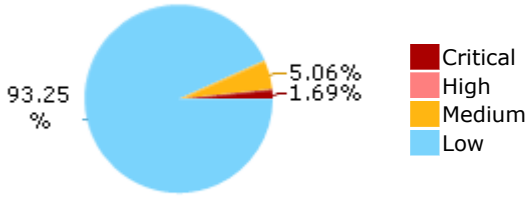

Most Vulnerable Files

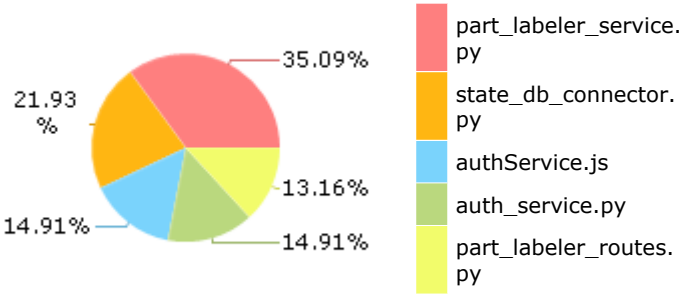

Top 5 Vulnerabilities

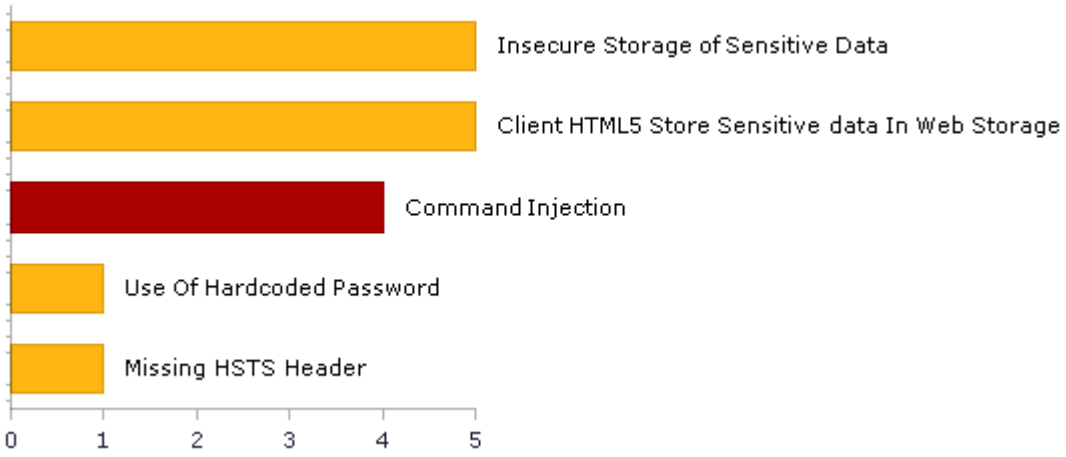

Scan Summary - OWASP Top 10 2017

Further details and elaboration about vulnerabilities and risks can be found at: OWASP Top 10 2017

Category	Threat Agent	Exploitability	Weakness Prevalence	Weakness Detectability	Technical Impact	Business Impact	Issues Found	Best Fix Locations *
A1-Injection**	App. Specific	EASY	COMMON	EASY	SEVERE	App. Specific	4	4
A2-Broken Authentication**	App. Specific	EASY	COMMON	AVERAGE	SEVERE	App. Specific	1	1
A3-Sensitive Data Exposure**	App. Specific	AVERAGE	WIDESPREAD	AVERAGE	SEVERE	App. Specific	25	8
A4-XML External Entities (XXE)	App. Specific	AVERAGE	COMMON	EASY	SEVERE	App. Specific	0	0
A5-Broken Access Control**	App. Specific	AVERAGE	COMMON	AVERAGE	SEVERE	App. Specific	0	0
A6-Security Misconfiguration **	App. Specific	EASY	WIDESPREAD	EASY	MODERATE	App. Specific	187	176
A7-Cross-Site Scripting (XSS)**	App. Specific	EASY	WIDESPREAD	EASY	MODERATE	App. Specific	0	0
A8-Insecure Deserialization	App. Specific	DIFFICULT	COMMON	AVERAGE	SEVERE	App. Specific	0	0
A9-Using Components with Known Vulnerabilities**	App. Specific	AVERAGE	WIDESPREAD	AVERAGE	MODERATE	App. Specific	0	0
A10-Insufficient Logging & Monitoring	App. Specific	AVERAGE	WIDESPREAD	DIFFICULT	MODERATE	App. Specific	0	0

* Best fix location values are absolute values derived from the entire vulnerabilities detected.
** Please note, the report only includes the presets/filters you applied to the scan results.

Scan Summary - OWASP Top 10 2021

Category	Issues Found	Best Fix Locations*
A1-Broken Access Control**	19	9
A2-Cryptographic Failures**	0	0
A3-Injection**	4	4
A4-Insecure Design**	192	177
A5-Security Misconfiguration	0	0
A6-Vulnerable and Outdated Components	0	0
A7-Identification and Authentication Failures**	2	2
A8-Software and Data Integrity Failures**	0	0
A9-Security Logging and Monitoring Failures**	20	7
A10-Server-Side Request Forgery	0	0

* Best fix location values are absolute values derived from the entire vulnerabilities detected.
** Please note, the report only includes the presets/filters you applied to the scan results.

Scan Summary - OWASP Mobile Top 10 2024

Category	Issues Found	Best Fix Locations*
M1: Improper Credential Usage	0	0
M2: Inadequate Supply Chain Security	0	0
M3: Insecure Authentication/Authorization	0	0
M4: Insufficient Input/Output Validation	0	0
M5: Insecure Communication	0	0
M6: Inadequate Privacy Controls	0	0
M7: Insufficient Binary Protections	0	0
M8: Security Misconfiguration	0	0
M9: Insecure Data Storage	0	0
M10: Insufficient Cryptography	0	0

* Best fix location values are absolute values derived from the entire vulnerabilities detected.

Scan Summary - PCI DSS v3.2.1

Category	Issues Found	Best Fix Locations*
PCI DSS (3.2.1) - 6.5.1 - Injection flaws - particularly SQL injection	4	4
PCI DSS (3.2.1) - 6.5.2 - Buffer overflows**	0	0
PCI DSS (3.2.1) - 6.5.3 - Insecure cryptographic storage	0	0
PCI DSS (3.2.1) - 6.5.4 - Insecure communications	0	0
PCI DSS (3.2.1) - 6.5.5 - Improper error handling	0	0
PCI DSS (3.2.1) - 6.5.7 - Cross-site scripting (XSS)**	0	0
PCI DSS (3.2.1) - 6.5.8 - Improper access control	20	7
PCI DSS (3.2.1) - 6.5.9 - Cross-site request forgery	0	0
PCI DSS (3.2.1) - 6.5.10 - Broken authentication and session management**	5	1

* Best fix location values are absolute values derived from the entire vulnerabilities detected.
** Please note, the report only includes the presets/filters you applied to the scan results.

Scan Summary - FISMA 2014

Category	Description	Issues Found	Best Fix Locations*
Access Control	Organizations must limit information system access to authorized users, processes acting on behalf of authorized users, or devices (including other information systems) and to the types of transactions and functions that authorized users are permitted to exercise.	0	0
Audit And Accountability	Organizations must: (i) create, protect, and retain information system audit records to the extent needed to enable the monitoring, analysis, investigation, and reporting of unlawful, unauthorized, or inappropriate information system activity; and (ii) ensure that the actions of individual information system users can be uniquely traced to those users so they can be held accountable for their actions.	0	0
Configuration Management	Organizations must: (i) establish and maintain baseline configurations and inventories of organizational information systems (including hardware, software, firmware, and documentation) throughout the respective system development life cycles; and (ii) establish and enforce security configuration settings for information technology products employed in organizational information systems.	187	176
Identification And Authentication**	Organizations must identify information system users, processes acting on behalf of users, or devices and authenticate (or verify) the identities of those users, processes, or devices, as a prerequisite to allowing access to organizational information systems.	1	1
Media Protection**	Organizations must: (i) protect information system media, both paper and digital; (ii) limit access to information on information system media to authorized users; and (iii) sanitize or destroy information system media before disposal or release for reuse.	5	1
System And Communications Protection	Organizations must: (i) monitor, control, and protect organizational communications (i.e., information transmitted or received by organizational information systems) at the external boundaries and key internal boundaries of the information systems; and (ii) employ architectural designs, software development techniques, and systems engineering principles that promote effective information security within organizational information systems.	0	0
System And Information Integrity**	Organizations must: (i) identify, report, and correct information and information system flaws in a timely manner; (ii) provide protection from malicious code at appropriate locations within organizational information systems; and (iii) monitor information system security alerts and advisories and take appropriate actions in response.	4	4

* Best fix location values are absolute values derived from the entire vulnerabilities detected.
** Please note, the report only includes the presets/filters you applied to the scan results.

Scan Summary - NIST SP 800-53

Category	Issues Found	Best Fix Locations*
AC-12 Session Termination (P2)	0	0
AC-3 Access Enforcement (P1)	0	0
AC-4 Information Flow Enforcement (P1)	0	0
AC-6 Least Privilege (P1)	0	0
AU-9 Protection of Audit Information (P1)**	0	0
CM-6 Configuration Settings (P2)	0	0
IA-5 Authenticator Management (P1)	0	0
IA-6 Authenticator Feedback (P2)	0	0
IA-8 Identification and Authentication (Non-Organizational Users) (P1)	0	0
SC-12 Cryptographic Key Establishment and Management (P1)	0	0
SC-13 Cryptographic Protection (P1)	0	0
SC-17 Public Key Infrastructure Certificates (P1)	0	0
SC-18 Mobile Code (P2)	0	0
SC-23 Session Authenticity (P1)	0	0
SC-28 Protection of Information at Rest (P1)**	6	2
SC-4 Information in Shared Resources (P1)**	0	0
SC-5 Denial of Service Protection (P1)	0	0
SC-8 Transmission Confidentiality and Integrity (P1)	0	0
SI-10 Information Input Validation (P1)**	4	4
SI-11 Error Handling (P2)	187	176
SI-15 Information Output Filtering (P0)**	0	0
SI-16 Memory Protection (P1)	0	0

* Best fix location values are absolute values derived from the entire vulnerabilities detected.
** Please note, the report only includes the presets/filters you applied to the scan results.

Scan Summary - OWASP Mobile Top 10 2016

Category	Description	Issues Found	Best Fix Locations*
M1-Improper Platform Usage	This category covers misuse of a platform feature or failure to use platform security controls. It might include Android intents, platform permissions, misuse of TouchID, the Keychain, or some other security control that is part of the mobile operating system. There are several ways that mobile apps can experience this risk.	0	0
M2-Insecure Data Storage	This category covers insecure data storage and unintended data leakage.	0	0
M3-Insecure Communication	This category covers poor handshaking, incorrect SSL versions, weak negotiation, cleartext communication of sensitive assets, etc.	0	0
M4-Insecure Authentication	This category captures notions of authenticating the end user or bad session management. This can include: -Failing to identify the user at all when that should be required -Failure to maintain the user's identity when it is required -Weaknesses in session management	0	0
M5-Insufficient Cryptography	The code applies cryptography to a sensitive information asset. However, the cryptography is insufficient in some way. Note that anything and everything related to TLS or SSL goes in M3. Also, if the app fails to use cryptography at all when it should, that probably belongs in M2. This category is for issues where cryptography was attempted, but it wasnt done correctly.	0	0
M6-Insecure Authorization	This is a category to capture any failures in authorization (e.g., authorization decisions in the client side, forced browsing, etc.). It is distinct from authentication issues (e.g., device enrolment, user identification, etc.). If the app does not authenticate users at all in a situation where it should (e.g., granting anonymous access to some resource or service when authenticated and authorized access is required), then that is an authentication failure not an authorization failure.	0	0
M7-Client Code Quality	This category is the catch-all for code-level implementation problems in the mobile client. That's distinct from server-side coding mistakes. This would capture things like buffer overflows, format string vulnerabilities, and various other code-level mistakes where the solution is to rewrite some code that's running on the mobile device.	0	0
M8-Code Tampering	This category covers binary patching, local resource modification, method hooking, method swizzling, and dynamic memory modification. Once the application is delivered to the mobile device, the code and data resources are resident there. An attacker can either directly modify the code, change the contents of memory dynamically, change or replace the system APIs that the	0	0

	application uses, or modify the application's data and resources. This can provide the attacker a direct method of subverting the intended use of the software for personal or monetary gain.		
M9-Reverse Engineering	This category includes analysis of the final core binary to determine its source code, libraries, algorithms, and other assets. Software such as IDA Pro, Hopper, otool, and other binary inspection tools give the attacker insight into the inner workings of the application. This may be used to exploit other nascent vulnerabilities in the application, as well as revealing information about back end servers, cryptographic constants and ciphers, and intellectual property.	0	0
M10-Extraneous Functionality	Often, developers include hidden backdoor functionality or other internal development security controls that are not intended to be released into a production environment. For example, a developer may accidentally include a password as a comment in a hybrid app. Another example includes disabling of 2-factor authentication during testing.	0	0

***** Best fix location values are absolute values derived from the entire vulnerabilities detected.

Scan Summary - Custom

Category	Issues Found	Best Fix Locations*
Must audit	0	0
Check	0	0
Optional	0	0

* Best fix location values are absolute values derived from the entire vulnerabilities detected.

Scan Summary - PCI DSS v4.0

Category	Issues Found	Best Fix Locations*
PCI DSS (4.0) - 6.2.4 Vulnerabilities in software development**	231	197
PCI DSS (4.0) - 8.6.2 Vulnerabilities related to passwords/passphrases usage**	1	1

* Best fix location values are absolute values derived from the entire vulnerabilities detected.
** Please note, the report only includes the presets/filters you applied to the scan results.

Scan Summary - ASD STIG 4.10

Category	Issues Found	Best Fix Locations*
APSC-DV-000640 - CAT II The application must provide audit record generation capability for the renewal of session IDs.	0	0
APSC-DV-000650 - CAT II The application must not write sensitive data into the application logs.	0	0
APSC-DV-000660 - CAT II The application must provide audit record generation capability for session timeouts.	0	0
APSC-DV-000670 - CAT II The application must record a time stamp indicating when the event occurred.	0	0
APSC-DV-000680 - CAT II The application must provide audit record generation capability for HTTP headers including User-Agent, Referer, GET, and POST.	0	0
APSC-DV-000690 - CAT II The application must provide audit record generation capability for connecting system IP addresses.	0	0
APSC-DV-000700 - CAT II The application must record the username or user ID of the user associated with the event.	0	0
APSC-DV-000710 - CAT II The application must generate audit records when successful/unsuccessful attempts to grant privileges occur.	0	0
APSC-DV-000720 - CAT II The application must generate audit records when successful/unsuccessful attempts to access security objects occur.	0	0
APSC-DV-000730 - CAT II The application must generate audit records when successful/unsuccessful attempts to access security levels occur.	0	0
APSC-DV-000740 - CAT II The application must generate audit records when successful/unsuccessful attempts to access categories of information (e.g., classification levels) occur.	0	0
APSC-DV-000750 - CAT II The application must generate audit records when successful/unsuccessful attempts to modify privileges occur.	0	0
APSC-DV-000760 - CAT II The application must generate audit records when successful/unsuccessful attempts to modify security objects occur.	0	0
APSC-DV-000770 - CAT II The application must generate audit records when successful/unsuccessful attempts to modify security levels occur.	0	0
APSC-DV-000780 - CAT II The application must generate audit records when successful/unsuccessful attempts to modify categories of information (e.g., classification levels) occur.	0	0
APSC-DV-000790 - CAT II The application must generate audit records when successful/unsuccessful attempts to delete privileges occur.	0	0
APSC-DV-000800 - CAT II The application must generate audit records when successful/unsuccessful attempts to delete security levels occur.	0	0
APSC-DV-000810 - CAT II The application must generate audit records when successful/unsuccessful attempts to delete application database security objects occur.	0	0
APSC-DV-000820 - CAT II The application must generate audit records when successful/unsuccessful attempts to delete categories of information (e.g., classification levels) occur.	0	0
APSC-DV-000830 - CAT II The application must generate audit records when successful/unsuccessful logon attempts occur.	0	0
APSC-DV-000840 - CAT II The application must generate audit records for privileged activities or other system-level access.	0	0
APSC-DV-000850 - CAT II The application must generate audit records showing starting and ending time for user access to the system.	0	0
APSC-DV-000860 - CAT II The application must generate audit records when successful/unsuccessful accesses to objects occur.	0	0

APSC-DV-000870 - CAT II The application must generate audit records for all direct access to the information system.	0	0
APSC-DV-000880 - CAT II The application must generate audit records for all account creations, modifications, disabling, and termination events.	0	0
APSC-DV-000910 - CAT II The application must initiate session auditing upon startup.	0	0
APSC-DV-000940 - CAT II The application must log application shutdown events.	0	0
APSC-DV-000950 - CAT II The application must log destination IP addresses.	0	0
APSC-DV-000960 - CAT II The application must log user actions involving access to data.	0	0
APSC-DV-000970 - CAT II The application must log user actions involving changes to data.	0	0
APSC-DV-000980 - CAT II The application must produce audit records containing information to establish when (date and time) the events occurred.	0	0
APSC-DV-000990 - CAT II The application must produce audit records containing enough information to establish which component, feature or function of the application triggered the audit event.	0	0
APSC-DV-001000 - CAT II When using centralized logging; the application must include a unique identifier in order to distinguish itself from other application logs.	0	0
APSC-DV-001010 - CAT II The application must produce audit records that contain information to establish the outcome of the events.	0	0
APSC-DV-001020 - CAT II The application must generate audit records containing information that establishes the identity of any individual or process associated with the event.	0	0
APSC-DV-001030 - CAT II The application must generate audit records containing the full-text recording of privileged commands or the individual identities of group account users.	0	0
APSC-DV-001040 - CAT II The application must implement transaction recovery logs when transaction based.	0	0
APSC-DV-001050 - CAT II The application must provide centralized management and configuration of the content to be captured in audit records generated by all application components.	0	0
APSC-DV-001070 - CAT II The application must off-load audit records onto a different system or media than the system being audited.	0	0
APSC-DV-001080 - CAT II The application must be configured to write application logs to a centralized log repository.	0	0
APSC-DV-001090 - CAT II The application must provide an immediate warning to the SA and ISSO (at a minimum) when allocated audit record storage volume reaches 75% of repository maximum audit record storage capacity.	0	0
APSC-DV-001100 - CAT II Applications categorized as having a moderate or high impact must provide an immediate real-time alert to the SA and ISSO (at a minimum) for all audit failure events.	0	0
APSC-DV-001110 - CAT II The application must alert the ISSO and SA (at a minimum) in the event of an audit processing failure.	0	0
APSC-DV-001120 - CAT II The application must shut down by default upon audit failure (unless availability is an overriding concern).	0	0
APSC-DV-001130 - CAT II The application must provide the capability to centrally review and analyze audit records from multiple components within the system.	0	0
APSC-DV-001140 - CAT II The application must provide the capability to filter audit records for events of interest based upon organization-defined criteria.	0	0
APSC-DV-001150 - CAT II The application must provide an audit reduction capability that supports on-demand reporting requirements.	0	0
APSC-DV-001160 - CAT II The application must provide an audit reduction capability that supports on-demand audit review and analysis.	0	0
APSC-DV-001170 - CAT II The application must provide an audit reduction capability that supports after-the-fact investigations of security incidents.	0	0
APSC-DV-001180 - CAT II The application must provide a report generation capability that supports on-demand audit review and analysis.	0	0
APSC-DV-001190 - CAT II The application must provide a report generation capability that	0	0

supports on-demand reporting requirements.		
APSC-DV-001200 - CAT II The application must provide a report generation capability that supports after-the-fact investigations of security incidents.	0	0
APSC-DV-001210 - CAT II The application must provide an audit reduction capability that does not alter original content or time ordering of audit records.	0	0
APSC-DV-001220 - CAT II The application must provide a report generation capability that does not alter original content or time ordering of audit records.	0	0
APSC-DV-001250 - CAT II The applications must use internal system clocks to generate time stamps for audit records.	0	0
APSC-DV-001260 - CAT II The application must record time stamps for audit records that can be mapped to Coordinated Universal Time (UTC) or Greenwich Mean Time (GMT).	0	0
APSC-DV-001270 - CAT II The application must record time stamps for audit records that meet a granularity of one second for a minimum degree of precision.	0	0
APSC-DV-001280 - CAT II The application must protect audit information from any type of unauthorized read access.	0	0
APSC-DV-001290 - CAT II The application must protect audit information from unauthorized modification.	0	0
APSC-DV-001300 - CAT II The application must protect audit information from unauthorized deletion.	0	0
APSC-DV-001310 - CAT II The application must protect audit tools from unauthorized access.	0	0
APSC-DV-001320 - CAT II The application must protect audit tools from unauthorized modification.	0	0
APSC-DV-001330 - CAT II The application must protect audit tools from unauthorized deletion.	0	0
APSC-DV-001340 - CAT II The application must back up audit records at least every seven days onto a different system or system component than the system or component being audited.	0	0
APSC-DV-001570 - CAT II The application must electronically verify Personal Identity Verification (PIV) credentials.	0	0
APSC-DV-001350 - CAT II The application must use cryptographic mechanisms to protect the integrity of audit information.	0	0
APSC-DV-001360 - CAT II Application audit tools must be cryptographically hashed.	0	0
APSC-DV-001370 - CAT II The integrity of the audit tools must be validated by checking the files for changes in the cryptographic hash value.	0	0
APSC-DV-001390 - CAT II The application must prohibit user installation of software without explicit privileged status.	0	0
APSC-DV-001410 - CAT II The application must enforce access restrictions associated with changes to application configuration.	0	0
APSC-DV-001420 - CAT II The application must audit who makes configuration changes to the application.	0	0
APSC-DV-001430 - CAT II The application must have the capability to prevent the installation of patches, service packs, or application components without verification the software component has been digitally signed using a certificate that is recognized and approved by the orga	0	0
APSC-DV-001440 - CAT II The applications must limit privileges to change the software resident within software libraries.	0	0
APSC-DV-001460 - CAT II An application vulnerability assessment must be conducted.	0	0
APSC-DV-001480 - CAT II The application must prevent program execution in accordance with organization-defined policies regarding software program usage and restrictions, and/or rules authorizing the terms and conditions of software program usage.	0	0
APSC-DV-001490 - CAT II The application must employ a deny-all, permit-by-exception (whitelist) policy to allow the execution of authorized software programs.	0	0
APSC-DV-001500 - CAT II The application must be configured to disable non-essential capabilities.	0	0

APSC-DV-001510 - CAT II The application must be configured to use only functions, ports, and protocols permitted to it in the PPSM CAL.	0	0
APSC-DV-001520 - CAT II The application must require users to reauthenticate when organization-defined circumstances or situations require reauthentication.	0	0
APSC-DV-001530 - CAT II The application must require devices to reauthenticate when organization-defined circumstances or situations requiring reauthentication.	0	0
APSC-DV-001540 - CAT I The application must uniquely identify and authenticate organizational users (or processes acting on behalf of organizational users).	0	0
APSC-DV-001550 - CAT II The application must use multifactor (Alt. Token) authentication for network access to privileged accounts.	0	0
APSC-DV-001560 - CAT II The application must accept Personal Identity Verification (PIV) credentials.	0	0
APSC-DV-001580 - CAT II The application must use multifactor (e.g., CAC, Alt. Token) authentication for network access to non-privileged accounts.	0	0
APSC-DV-001590 - CAT II The application must use multifactor (Alt. Token) authentication for local access to privileged accounts.	0	0
APSC-DV-001600 - CAT II The application must use multifactor (e.g., CAC, Alt. Token) authentication for local access to non-privileged accounts.	0	0
APSC-DV-001610 - CAT II The application must ensure users are authenticated with an individual authenticator prior to using a group authenticator.	0	0
APSC-DV-001620 - CAT II The application must implement replay-resistant authentication mechanisms for network access to privileged accounts.	0	0
APSC-DV-001630 - CAT II The application must implement replay-resistant authentication mechanisms for network access to non-privileged accounts.	0	0
APSC-DV-001640 - CAT II The application must utilize mutual authentication when endpoint device non-repudiation protections are required by DoD policy or by the data owner.	0	0
APSC-DV-001650 - CAT II The application must authenticate all network connected endpoint devices before establishing any connection.	0	0
APSC-DV-001660 - CAT II Service-Oriented Applications handling non-releasable data must authenticate endpoint devices via mutual SSL/TLS.	0	0
APSC-DV-001670 - CAT II The application must disable device identifiers after 35 days of inactivity unless a cryptographic certificate is used for authentication.	0	0
APSC-DV-001680 - CAT I The application must enforce a minimum 15-character password length.	0	0
APSC-DV-001690 - CAT II The application must enforce password complexity by requiring that at least one upper-case character be used.	0	0
APSC-DV-001700 - CAT II The application must enforce password complexity by requiring that at least one lower-case character be used.	0	0
APSC-DV-001710 - CAT II The application must enforce password complexity by requiring that at least one numeric character be used.	0	0
APSC-DV-001720 - CAT II The application must enforce password complexity by requiring that at least one special character be used.	0	0
APSC-DV-001730 - CAT II The application must require the change of at least 8 of the total number of characters when passwords are changed.	0	0
APSC-DV-001740 - CAT I The application must only store cryptographic representations of passwords.	0	0
APSC-DV-001850 - CAT I The application must not display passwords/PINs as clear text.	0	0
APSC-DV-001750 - CAT I The application must transmit only cryptographically-protected passwords.	0	0
APSC-DV-001760 - CAT II The application must enforce 24 hours/1 day as the minimum password lifetime.	0	0
APSC-DV-001770 - CAT II The application must enforce a 60-day maximum password lifetime restriction.	0	0
APSC-DV-001780 - CAT II The application must prohibit password reuse for a minimum of five generations.	0	0

APSC-DV-001790 - CAT II The application must allow the use of a temporary password for system logons with an immediate change to a permanent password.	0	0
APSC-DV-001795 - CAT II The application password must not be changeable by users other than the administrator or the user with which the password is associated.	0	0
APSC-DV-001800 - CAT II The application must terminate existing user sessions upon account deletion.	0	0
APSC-DV-001820 - CAT I The application, when using PKI-based authentication, must enforce authorized access to the corresponding private key.	0	0
APSC-DV-001830 - CAT II The application must map the authenticated identity to the individual user or group account for PKI-based authentication.	0	0
APSC-DV-001870 - CAT II The application must uniquely identify and authenticate non-organizational users (or processes acting on behalf of non-organizational users).	0	0
APSC-DV-001810 - CAT I The application, when utilizing PKI-based authentication, must validate certificates by constructing a certification path (which includes status information) to an accepted trust anchor.	0	0
APSC-DV-001840 - CAT II The application, for PKI-based authentication, must implement a local cache of revocation data to support path discovery and validation in case of the inability to access revocation information via the network.	0	0
APSC-DV-001860 - CAT II The application must use mechanisms meeting the requirements of applicable federal laws, Executive Orders, directives, policies, regulations, standards, and guidance for authentication to a cryptographic module.	0	0
APSC-DV-001880 - CAT II The application must accept Personal Identity Verification (PIV) credentials from other federal agencies.	0	0
APSC-DV-001890 - CAT II The application must electronically verify Personal Identity Verification (PIV) credentials from other federal agencies.	0	0
APSC-DV-002050 - CAT II Applications making SAML assertions must use FIPS-approved random numbers in the generation of SessionIndex in the SAML element AuthnStatement.	0	0
APSC-DV-001900 - CAT II The application must accept FICAM-approved third-party credentials.	0	0
APSC-DV-001910 - CAT II The application must conform to FICAM-issued profiles.	0	0
APSC-DV-001930 - CAT II Applications used for non-local maintenance sessions must audit non-local maintenance and diagnostic sessions for organization-defined auditable events.	0	0
APSC-DV-000310 - CAT III The application must have a process, feature or function that prevents removal or disabling of emergency accounts.	0	0
APSC-DV-001940 - CAT II Applications used for non-local maintenance sessions must implement cryptographic mechanisms to protect the integrity of non-local maintenance and diagnostic communications.	0	0
APSC-DV-001950 - CAT II Applications used for non-local maintenance sessions must implement cryptographic mechanisms to protect the confidentiality of non-local maintenance and diagnostic communications.	0	0
APSC-DV-001960 - CAT II Applications used for non-local maintenance sessions must verify remote disconnection at the termination of non-local maintenance and diagnostic sessions.	0	0
APSC-DV-001970 - CAT II The application must employ strong authenticators in the establishment of non-local maintenance and diagnostic sessions.	0	0
APSC-DV-001980 - CAT II The application must terminate all sessions and network connections when non-local maintenance is completed.	0	0
APSC-DV-001995 - CAT II The application must not be vulnerable to race conditions.	0	0
APSC-DV-002000 - CAT II The application must terminate all network connections associated with a communications session at the end of the session.	0	0
APSC-DV-002010 - CAT II The application must implement NSA-approved cryptography to protect classified information in accordance with applicable federal laws, Executive Orders, directives, policies, regulations, and standards.	0	0
APSC-DV-002020 - CAT II The application must utilize FIPS-validated cryptographic modules when signing application components.	0	0
APSC-DV-002030 - CAT II The application must utilize FIPS-validated cryptographic modules when generating cryptographic hashes.	0	0

APSC-DV-002040 - CAT II The application must utilize FIPS-validated cryptographic modules when protecting unclassified information that requires cryptographic protection.	0	0
APSC-DV-002150 - CAT II The application user interface must be either physically or logically separated from data storage and management interfaces.	0	0
APSC-DV-002210 - CAT II The application must set the HTTPOnly flag on session cookies.	0	0
APSC-DV-002220 - CAT II The application must set the secure flag on session cookies.	0	0
APSC-DV-002230 - CAT I The application must not expose session IDs.	0	0
APSC-DV-002240 - CAT I The application must destroy the session ID value and/or cookie on logoff or browser close.	0	0
APSC-DV-002250 - CAT II Applications must use system-generated session identifiers that protect against session fixation.	0	0
APSC-DV-002260 - CAT II Applications must validate session identifiers.	0	0
APSC-DV-002270 - CAT II Applications must not use URL embedded session IDs.	0	0
APSC-DV-002280 - CAT II The application must not re-use or recycle session IDs.	0	0
APSC-DV-002290 - CAT II The application must use the Federal Information Processing Standard (FIPS) 140-2-validated cryptographic modules and random number generator if the application implements encryption, key exchange, digital signature, and hash functionality.	0	0
APSC-DV-002300 - CAT II The application must only allow the use of DoD-approved certificate authorities for verification of the establishment of protected sessions.	0	0
APSC-DV-002310 - CAT I The application must fail to a secure state if system initialization fails, shutdown fails, or aborts fail.	0	0
APSC-DV-002320 - CAT II In the event of a system failure, applications must preserve any information necessary to determine cause of failure and any information necessary to return to operations with least disruption to mission processes.	0	0
APSC-DV-002330 - CAT II The application must protect the confidentiality and integrity of stored information when required by DoD policy or the information owner.	0	0
APSC-DV-002340 - CAT II The application must implement approved cryptographic mechanisms to prevent unauthorized modification of organization-defined information at rest on organization-defined information system components.	0	0
APSC-DV-002350 - CAT II The application must use appropriate cryptography in order to protect stored DoD information when required by the information owner or DoD policy.	0	0
APSC-DV-002360 - CAT II The application must isolate security functions from non-security functions.	0	0
APSC-DV-002370 - CAT II The application must maintain a separate execution domain for each executing process.	0	0
APSC-DV-002380 - CAT II Applications must prevent unauthorized and unintended information transfer via shared system resources.	0	0
APSC-DV-002390 - CAT II XML-based applications must mitigate DoS attacks by using XML filters, parser options, or gateways.	0	0
APSC-DV-002400 - CAT II The application must restrict the ability to launch Denial of Service (DoS) attacks against itself or other information systems.	0	0
APSC-DV-002410 - CAT II The web service design must include redundancy mechanisms when used with high-availability systems.	0	0
APSC-DV-002420 - CAT II An XML firewall function must be deployed to protect web services when exposed to untrusted networks.	0	0
APSC-DV-002610 - CAT II The application must remove organization-defined software components after updated versions have been installed.	0	0
APSC-DV-002440 - CAT I The application must protect the confidentiality and integrity of transmitted information.	0	0
APSC-DV-002450 - CAT II The application must implement cryptographic mechanisms to prevent unauthorized disclosure of information and/or detect changes to information during transmission unless otherwise protected by alternative physical safeguards, such as, at a minimum, a Prot	0	0
APSC-DV-002460 - CAT II The application must maintain the confidentiality and integrity of	0	0

information during preparation for transmission.		
APSC-DV-002470 - CAT II The application must maintain the confidentiality and integrity of information during reception.	0	0
APSC-DV-002480 - CAT II The application must not disclose unnecessary information to users.	0	0
APSC-DV-002485 - CAT I The application must not store sensitive information in hidden fields.	0	0
APSC-DV-002490 - CAT I The application must protect from Cross-Site Scripting (XSS) vulnerabilities.	0	0
APSC-DV-002500 - CAT II The application must protect from Cross-Site Request Forgery (CSRF) vulnerabilities.	0	0
APSC-DV-002510 - CAT I The application must protect from command injection.	0	0
APSC-DV-002520 - CAT II The application must protect from canonical representation vulnerabilities.	0	0
APSC-DV-002530 - CAT II The application must validate all input.	0	0
APSC-DV-002540 - CAT I The application must not be vulnerable to SQL Injection.	0	0
APSC-DV-002550 - CAT I The application must not be vulnerable to XML-oriented attacks.	0	0
APSC-DV-002560 - CAT I The application must not be subject to input handling vulnerabilities.	0	0
APSC-DV-002570 - CAT II The application must generate error messages that provide information necessary for corrective actions without revealing information that could be exploited by adversaries.	0	0
APSC-DV-002580 - CAT II The application must reveal error messages only to the ISSO, ISSM, or SA.	0	0
APSC-DV-002590 - CAT I The application must not be vulnerable to overflow attacks.	0	0
APSC-DV-002630 - CAT II Security-relevant software updates and patches must be kept up to date.	0	0
APSC-DV-002760 - CAT II The application performing organization-defined security functions must verify correct operation of security functions.	0	0
APSC-DV-002900 - CAT II The ISSO must ensure application audit trails are retained for at least 1 year for applications without SAMI data, and 5 years for applications including SAMI data.	0	0
APSC-DV-002770 - CAT II The application must perform verification of the correct operation of security functions: upon system startup and/or restart; upon command by a user with privileged access; and/or every 30 days.	0	0
APSC-DV-002780 - CAT III The application must notify the ISSO and ISSM of failed security verification tests.	0	0
APSC-DV-002870 - CAT II Unsigned Category 1A mobile code must not be used in the application in accordance with DoD policy.	0	0
APSC-DV-002880 - CAT II The ISSO must ensure an account management process is implemented, verifying only authorized users can gain access to the application, and individual accounts designated as inactive, suspended, or terminated are promptly removed.	0	0
APSC-DV-002890 - CAT I Application web servers must be on a separate network segment from the application and database servers if it is a tiered application operating in the DoD DMZ.	0	0
APSC-DV-002910 - CAT II The ISSO must review audit trails periodically based on system documentation recommendations or immediately upon system security events.	0	0
APSC-DV-002920 - CAT II The ISSO must report all suspected violations of IA policies in accordance with DoD information system IA procedures.	0	0
APSC-DV-002930 - CAT II The ISSO must ensure active vulnerability testing is performed.	0	0
APSC-DV-002980 - CAT II New IP addresses, data services, and associated ports used by the application must be submitted to the appropriate approving authority for the organization, which in turn will be submitted through the DoD Ports, Protocols, and Services Management (DoD PPS	0	0
APSC-DV-002950 - CAT II Execution flow diagrams and design documents must be created	0	0

to show how deadlock and recursion issues in web services are being mitigated.		
APSC-DV-002960 - CAT II The designer must ensure the application does not store configuration and control files in the same directory as user data.	0	0
APSC-DV-002970 - CAT II The ISSO must ensure if a DoD STIG or NSA guide is not available, a third-party product will be configured by following available guidance.	0	0
APSC-DV-002990 - CAT II The application must be registered with the DoD Ports and Protocols Database.	0	0
APSC-DV-002995 - CAT II The Configuration Management (CM) repository must be properly patched and STIG compliant.	0	0
APSC-DV-003000 - CAT II Access privileges to the Configuration Management (CM) repository must be reviewed every three months.	0	0
APSC-DV-003010 - CAT II A Software Configuration Management (SCM) plan describing the configuration control and change management process of application objects developed by the organization and the roles and responsibilities of the organization must be created and maintained.	0	0
APSC-DV-003020 - CAT II A Configuration Control Board (CCB) that meets at least every release cycle, for managing the Configuration Management (CM) process must be established.	0	0
APSC-DV-003030 - CAT II The application services and interfaces must be compatible with and ready for IPv6 networks.	0	0
APSC-DV-003040 - CAT II The application must not be hosted on a general purpose machine if the application is designated as critical or high availability by the ISSO.	0	0
APSC-DV-003050 - CAT II A disaster recovery/continuity plan must exist in accordance with DoD policy based on the applications availability requirements.	0	0
APSC-DV-003060 - CAT II Recovery procedures and technical system features must exist so recovery is performed in a secure and verifiable manner. The ISSO will document circumstances inhibiting a trusted recovery.	0	0
APSC-DV-003070 - CAT II Data backup must be performed at required intervals in accordance with DoD policy.	0	0
APSC-DV-003080 - CAT II Back-up copies of the application software or source code must be stored in a fire-rated container or stored separately (offsite).	0	0
APSC-DV-003090 - CAT II Procedures must be in place to assure the appropriate physical and technical protection of the backup and restoration of the application.	0	0
APSC-DV-003100 - CAT II The application must use encryption to implement key exchange and authenticate endpoints prior to establishing a communication channel for key exchange.	0	0
APSC-DV-003110 - CAT I The application must not contain embedded authentication data.	0	0
APSC-DV-003120 - CAT I The application must have the capability to mark sensitive/classified output when required.	0	0
APSC-DV-003130 - CAT III Prior to each release of the application, updates to system, or applying patches; tests plans and procedures must be created and executed.	0	0
APSC-DV-003150 - CAT II At least one tester must be designated to test for security flaws in addition to functional testing.	0	0
APSC-DV-003140 - CAT II Application files must be cryptographically hashed prior to deploying to DoD operational networks.	0	0
APSC-DV-003160 - CAT III Test procedures must be created and at least annually executed to ensure system initialization, shutdown, and aborts are configured to verify the system remains in a secure state.	0	0
APSC-DV-003170 - CAT II An application code review must be performed on the application.	0	0
APSC-DV-003180 - CAT III Code coverage statistics must be maintained for each release of the application.	0	0
APSC-DV-003190 - CAT II Flaws found during a code review must be tracked in a defect tracking system.	0	0
APSC-DV-003200 - CAT II The changes to the application must be assessed for IA and accreditation impact prior to implementation.	0	0
APSC-DV-003210 - CAT II Security flaws must be fixed or addressed in the project plan.	0	0

APSC-DV-003215 - CAT III The application development team must follow a set of coding standards.	0	0
APSC-DV-003220 - CAT III The designer must create and update the Design Document for each release of the application.	0	0
APSC-DV-003230 - CAT II Threat models must be documented and reviewed for each application release and updated as required by design and functionality changes or when new threats are discovered.	0	0
APSC-DV-003235 - CAT II The application must not be subject to error handling vulnerabilities.	0	0
APSC-DV-003250 - CAT I The application must be decommissioned when maintenance or support is no longer available.	0	0
APSC-DV-003236 - CAT II The application development team must provide an application incident response plan.	0	0
APSC-DV-003240 - CAT I All products must be supported by the vendor or the development team.	0	0
APSC-DV-003260 - CAT III Procedures must be in place to notify users when an application is decommissioned.	0	0
APSC-DV-003270 - CAT II Unnecessary built-in application accounts must be disabled.	0	0
APSC-DV-003280 - CAT I Default passwords must be changed.	0	0
APSC-DV-003330 - CAT II The system must alert an administrator when low resource conditions are encountered.	0	0
APSC-DV-003285 - CAT II An Application Configuration Guide must be created and included with the application.	0	0
APSC-DV-003290 - CAT II If the application contains classified data, a Security Classification Guide must exist containing data elements and their classification.	0	0
APSC-DV-003300 - CAT II The designer must ensure uncategorized or emerging mobile code is not used in applications.	0	0
APSC-DV-003310 - CAT II Production database exports must have database administration credentials and sensitive data removed before releasing the export.	0	0
APSC-DV-003320 - CAT II Protections against DoS attacks must be implemented.	0	0
APSC-DV-003340 - CAT III At least one application administrator must be registered to receive update notifications, or security alerts, when automated alerts are available.	0	0
APSC-DV-003360 - CAT III The application must generate audit records when concurrent logons from different workstations occur.	0	0
APSC-DV-003345 - CAT III The application must provide notifications or alerts when product update and security related patches are available.	0	0
APSC-DV-003350 - CAT II Connections between the DoD enclave and the Internet or other public or commercial wide area networks must require a DMZ.	0	0
APSC-DV-003400 - CAT II The Program Manager must verify all levels of program management, designers, developers, and testers receive annual security training pertaining to their job function.	0	0
APSC-DV-000010 - CAT II The application must provide a capability to limit the number of logon sessions per user.	0	0
APSC-DV-000060 - CAT II The application must clear temporary storage and cookies when the session is terminated.	0	0
APSC-DV-000070 - CAT II The application must automatically terminate the non-privileged user session and log off non-privileged users after a 15 minute idle time period has elapsed.	0	0
APSC-DV-000080 - CAT II The application must automatically terminate the admin user session and log off admin users after a 10 minute idle time period is exceeded.	0	0
APSC-DV-000090 - CAT II Applications requiring user access authentication must provide a logoff capability for user initiated communication session.	0	0
APSC-DV-000100 - CAT III The application must display an explicit logoff message to users indicating the reliable termination of authenticated communications sessions.	0	0
APSC-DV-000110 - CAT II The application must associate organization-defined types of security attributes having organization-defined security attribute values with information in	0	0

storage.		
APSC-DV-000120 - CAT II The application must associate organization-defined types of security attributes having organization-defined security attribute values with information in process.	0	0
APSC-DV-000130 - CAT II The application must associate organization-defined types of security attributes having organization-defined security attribute values with information in transmission.	0	0
APSC-DV-000160 - CAT II The application must implement DoD-approved encryption to protect the confidentiality of remote access sessions.	0	0
APSC-DV-000170 - CAT II The application must implement cryptographic mechanisms to protect the integrity of remote access sessions.	0	0
APSC-DV-000190 - CAT I Messages protected with WS_Security must use time stamps with creation and expiration times.	0	0
APSC-DV-000180 - CAT II Applications with SOAP messages requiring integrity must include the following message elements:-Message ID-Service Request-Timestamp-SAML Assertion (optionally included in messages) and all elements of the message must be digitally signed.	0	0
APSC-DV-000200 - CAT I Validity periods must be verified on all application messages using WS-Security or SAML assertions.	0	0
APSC-DV-000210 - CAT II The application must ensure each unique asserting party provides unique assertion ID references for each SAML assertion.	0	0
APSC-DV-000220 - CAT II The application must ensure encrypted assertions, or equivalent confidentiality protections are used when assertion data is passed through an intermediary, and confidentiality of the assertion data is required when passing through the intermediary.	0	0
APSC-DV-000230 - CAT I The application must use the NotOnOrAfter condition when using the SubjectConfirmation element in a SAML assertion.	0	0
APSC-DV-000240 - CAT I The application must use both the NotBefore and NotOnOrAfter elements or OneTimeUse element when using the Conditions element in a SAML assertion.	0	0
APSC-DV-000250 - CAT II The application must ensure if a OneTimeUse element is used in an assertion, there is only one of the same used in the Conditions element portion of an assertion.	0	0
APSC-DV-000260 - CAT II The application must ensure messages are encrypted when the SessionIndex is tied to privacy data.	0	0
APSC-DV-000290 - CAT II Shared/group account credentials must be terminated when members leave the group.	0	0
APSC-DV-000280 - CAT II The application must provide automated mechanisms for supporting account management functions.	0	0
APSC-DV-000300 - CAT II The application must automatically remove or disable temporary user accounts 72 hours after account creation.	0	0
APSC-DV-000320 - CAT III The application must automatically disable accounts after a 35 day period of account inactivity.	0	0
APSC-DV-000330 - CAT II Unnecessary application accounts must be disabled, or deleted.	0	0
APSC-DV-000420 - CAT II The application must automatically audit account enabling actions.	0	0
APSC-DV-000340 - CAT II The application must automatically audit account creation.	0	0
APSC-DV-000350 - CAT II The application must automatically audit account modification.	0	0
APSC-DV-000360 - CAT II The application must automatically audit account disabling actions.	0	0
APSC-DV-000370 - CAT II The application must automatically audit account removal actions.	0	0
APSC-DV-000380 - CAT III The application must notify System Administrators and Information System Security Officers when accounts are created.	0	0
APSC-DV-000390 - CAT III The application must notify System Administrators and Information System Security Officers when accounts are modified.	0	0
APSC-DV-000400 - CAT III The application must notify System Administrators and Information System Security Officers of account disabling actions.	0	0

APSC-DV-000410 - CAT III The application must notify System Administrators and Information System Security Officers of account removal actions.	0	0
APSC-DV-000430 - CAT III The application must notify System Administrators and Information System Security Officers of account enabling actions.	0	0
APSC-DV-000440 - CAT II Application data protection requirements must be identified and documented.	0	0
APSC-DV-000520 - CAT II The application must audit the execution of privileged functions.	0	0
APSC-DV-000450 - CAT II The application must utilize organization-defined data mining detection techniques for organization-defined data storage objects to adequately detect data mining attempts.	0	0
APSC-DV-000460 - CAT I The application must enforce approved authorizations for logical access to information and system resources in accordance with applicable access control policies.	0	0
APSC-DV-000470 - CAT II The application must enforce organization-defined discretionary access control policies over defined subjects and objects.	0	0
APSC-DV-000480 - CAT II The application must enforce approved authorizations for controlling the flow of information within the system based on organization-defined information flow control policies.	0	0
APSC-DV-000490 - CAT II The application must enforce approved authorizations for controlling the flow of information between interconnected systems based on organization-defined information flow control policies.	0	0
APSC-DV-000500 - CAT II The application must prevent non-privileged users from executing privileged functions to include disabling, circumventing, or altering implemented security safeguards/countermeasures.	0	0
APSC-DV-000510 - CAT I The application must execute without excessive account permissions.	0	0
APSC-DV-000530 - CAT I The application must enforce the limit of three consecutive invalid logon attempts by a user during a 15 minute time period.	0	0
APSC-DV-000560 - CAT III The application must retain the Standard Mandatory DoD Notice and Consent Banner on the screen until users acknowledge the usage conditions and take explicit actions to log on for further access.	0	0
APSC-DV-000540 - CAT II The application administrator must follow an approved process to unlock locked user accounts.	0	0
APSC-DV-000550 - CAT III The application must display the Standard Mandatory DoD Notice and Consent Banner before granting access to the application.	0	0
APSC-DV-000570 - CAT III The publicly accessible application must display the Standard Mandatory DoD Notice and Consent Banner before granting access to the application.	0	0
APSC-DV-000580 - CAT III The application must display the time and date of the users last successful logon.	0	0
APSC-DV-000630 - CAT II The application must provide audit record generation capability for the destruction of session IDs.	0	0
APSC-DV-000590 - CAT II The application must protect against an individual (or process acting on behalf of an individual) falsely denying having performed organization-defined actions to be covered by non-repudiation.	0	0
APSC-DV-000600 - CAT II For applications providing audit record aggregation, the application must compile audit records from organization-defined information system components into a system-wide audit trail that is time-correlated with an organization-defined level of tolerance	0	0
APSC-DV-000610 - CAT II The application must provide the capability for organization-identified individuals or roles to change the auditing to be performed on all application components, based on all selectable event criteria within organization-defined time thresholds.	0	0
APSC-DV-000620 - CAT II The application must provide audit record generation capability for the creation of session IDs.	0	0

***** Best fix location values are absolute values derived from the entire vulnerabilities detected.

Scan Summary - ASD STIG 6.1

Category	Issues Found	Best Fix Locations*
APSC-DV-000640 - CAT II The application must provide audit record generation capability for the renewal of session IDs.	0	0
APSC-DV-000650 - CAT II The application must not write sensitive data into the application logs.	0	0
APSC-DV-000660 - CAT II The application must provide audit record generation capability for session timeouts.	0	0
APSC-DV-000670 - CAT II The application must record a time stamp indicating when the event occurred.	0	0
APSC-DV-000680 - CAT II The application must provide audit record generation capability for HTTP headers including User-Agent, Referer, GET, and POST.	0	0
APSC-DV-000690 - CAT II The application must provide audit record generation capability for connecting system IP addresses.	0	0
APSC-DV-000700 - CAT II The application must record the username or user ID of the user associated with the event.	0	0
APSC-DV-000710 - CAT II The application must generate audit records when successful/unsuccessful attempts to grant privileges occur.	0	0
APSC-DV-000720 - CAT II The application must generate audit records when successful/unsuccessful attempts to access security objects occur.	0	0
APSC-DV-000730 - CAT II The application must generate audit records when successful/unsuccessful attempts to access security levels occur.	0	0
APSC-DV-000740 - CAT II The application must generate audit records when successful/unsuccessful attempts to access categories of information (e.g., classification levels) occur.	0	0
APSC-DV-000750 - CAT II The application must generate audit records when successful/unsuccessful attempts to modify privileges occur.	0	0
APSC-DV-000760 - CAT II The application must generate audit records when successful/unsuccessful attempts to modify security objects occur.	0	0
APSC-DV-000770 - CAT II The application must generate audit records when successful/unsuccessful attempts to modify security levels occur.	0	0
APSC-DV-000780 - CAT II The application must generate audit records when successful/unsuccessful attempts to modify categories of information (e.g., classification levels) occur.	0	0
APSC-DV-000790 - CAT II The application must generate audit records when successful/unsuccessful attempts to delete privileges occur.	0	0
APSC-DV-000800 - CAT II The application must generate audit records when successful/unsuccessful attempts to delete security levels occur.	0	0
APSC-DV-000810 - CAT II The application must generate audit records when successful/unsuccessful attempts to delete application database security objects occur.	0	0
APSC-DV-000820 - CAT II The application must generate audit records when successful/unsuccessful attempts to delete categories of information (e.g., classification levels) occur.	0	0
APSC-DV-000830 - CAT II The application must generate audit records when successful/unsuccessful logon attempts occur.	0	0
APSC-DV-000840 - CAT II The application must generate audit records for privileged activities or other system-level access.	0	0
APSC-DV-000850 - CAT II The application must generate audit records showing starting and ending time for user access to the system.	0	0
APSC-DV-000860 - CAT II The application must generate audit records when successful/unsuccessful accesses to objects occur.	0	0

APSC-DV-000870 - CAT II The application must generate audit records for all direct access to the information system.	0	0
APSC-DV-000880 - CAT II The application must generate audit records for all account creations, modifications, disabling, and termination events.	0	0
APSC-DV-000910 - CAT II The application must initiate session auditing upon startup.	0	0
APSC-DV-000940 - CAT II The application must log application shutdown events.	0	0
APSC-DV-000950 - CAT II The application must log destination IP addresses.	0	0
APSC-DV-000960 - CAT II The application must log user actions involving access to data.	0	0
APSC-DV-000970 - CAT II The application must log user actions involving changes to data.	0	0
APSC-DV-000980 - CAT II The application must produce audit records containing information to establish when (date and time) the events occurred.	0	0
APSC-DV-000990 - CAT II The application must produce audit records containing enough information to establish which component, feature or function of the application triggered the audit event.	0	0
APSC-DV-001000 - CAT II When using centralized logging; the application must include a unique identifier in order to distinguish itself from other application logs.	0	0
APSC-DV-001010 - CAT II The application must produce audit records that contain information to establish the outcome of the events.	0	0
APSC-DV-001020 - CAT II The application must generate audit records containing information that establishes the identity of any individual or process associated with the event.	0	0
APSC-DV-001030 - CAT II The application must generate audit records containing the full-text recording of privileged commands or the individual identities of group account users.	0	0
APSC-DV-001040 - CAT II The application must implement transaction recovery logs when transaction based.	0	0
APSC-DV-001050 - CAT II The application must provide centralized management and configuration of the content to be captured in audit records generated by all application components.	0	0
APSC-DV-001070 - CAT II The application must off-load audit records onto a different system or media than the system being audited.	0	0
APSC-DV-001080 - CAT II The application must be configured to write application logs to a centralized log repository.	0	0
APSC-DV-001090 - CAT II The application must provide an immediate warning to the SA and ISSO (at a minimum) when allocated audit record storage volume reaches 75% of repository maximum audit record storage capacity.	0	0
APSC-DV-001100 - CAT II Applications categorized as having a moderate or high impact must provide an immediate real-time alert to the SA and ISSO (at a minimum) for all audit failure events.	0	0
APSC-DV-001110 - CAT II The application must alert the ISSO and SA (at a minimum) in the event of an audit processing failure.	0	0
APSC-DV-001120 - CAT II The application must shut down by default upon audit failure (unless availability is an overriding concern).	0	0
APSC-DV-001130 - CAT II The application must provide the capability to centrally review and analyze audit records from multiple components within the system.	0	0
APSC-DV-001140 - CAT II The application must provide the capability to filter audit records for events of interest based upon organization-defined criteria.	0	0
APSC-DV-001150 - CAT II The application must provide an audit reduction capability that supports on-demand reporting requirements.	0	0
APSC-DV-001160 - CAT II The application must provide an audit reduction capability that supports on-demand audit review and analysis.	0	0
APSC-DV-001170 - CAT II The application must provide an audit reduction capability that supports after-the-fact investigations of security incidents.	0	0
APSC-DV-001180 - CAT II The application must provide a report generation capability that supports on-demand audit review and analysis.	0	0
APSC-DV-001190 - CAT II The application must provide a report generation capability that	0	0

supports on-demand reporting requirements.		
APSC-DV-001200 - CAT II The application must provide a report generation capability that supports after-the-fact investigations of security incidents.	0	0
APSC-DV-001210 - CAT II The application must provide an audit reduction capability that does not alter original content or time ordering of audit records.	0	0
APSC-DV-001220 - CAT II The application must provide a report generation capability that does not alter original content or time ordering of audit records.	0	0
APSC-DV-001250 - CAT II The applications must use internal system clocks to generate time stamps for audit records.	0	0
APSC-DV-001260 - CAT II The application must record time stamps for audit records that can be mapped to Coordinated Universal Time (UTC) or Greenwich Mean Time (GMT).	0	0
APSC-DV-001270 - CAT II The application must record time stamps for audit records that meet a granularity of one second for a minimum degree of precision.	0	0
APSC-DV-001280 - CAT II The application must protect audit information from any type of unauthorized read access.	0	0
APSC-DV-001290 - CAT II The application must protect audit information from unauthorized modification.	0	0
APSC-DV-001300 - CAT II The application must protect audit information from unauthorized deletion.	0	0
APSC-DV-001310 - CAT II The application must protect audit tools from unauthorized access.	0	0
APSC-DV-001320 - CAT II The application must protect audit tools from unauthorized modification.	0	0
APSC-DV-001330 - CAT II The application must protect audit tools from unauthorized deletion.	0	0
APSC-DV-001340 - CAT II The application must back up audit records at least every seven days onto a different system or system component than the system or component being audited.	0	0
APSC-DV-001570 - CAT II The application must electronically verify Personal Identity Verification (PIV) credentials.	0	0
APSC-DV-001350 - CAT II The application must use cryptographic mechanisms to protect the integrity of audit information.	0	0
APSC-DV-001360 - CAT II Application audit tools must be cryptographically hashed.	0	0
APSC-DV-001370 - CAT II The integrity of the audit tools must be validated by checking the files for changes in the cryptographic hash value.	0	0
APSC-DV-001390 - CAT II The application must prohibit user installation of software without explicit privileged status.	0	0
APSC-DV-001410 - CAT II The application must enforce access restrictions associated with changes to application configuration.	0	0
APSC-DV-001420 - CAT II The application must audit who makes configuration changes to the application.	0	0
APSC-DV-001430 - CAT II The application must have the capability to prevent the installation of patches, service packs, or application components without verification the software component has been digitally signed using a certificate that is recognized and approved by the orga	0	0
APSC-DV-001440 - CAT II The applications must limit privileges to change the software resident within software libraries.	0	0
APSC-DV-001460 - CAT II An application vulnerability assessment must be conducted.	0	0
APSC-DV-001480 - CAT II The application must prevent program execution in accordance with organization-defined policies regarding software program usage and restrictions, and/or rules authorizing the terms and conditions of software program usage.	0	0
APSC-DV-001490 - CAT II The application must employ a deny-all, permit-by-exception (whitelist) policy to allow the execution of authorized software programs.	0	0
APSC-DV-001500 - CAT II The application must be configured to disable non-essential capabilities.	0	0

APSC-DV-001510 - CAT II The application must be configured to use only functions, ports, and protocols permitted to it in the PPSM CAL.	0	0
APSC-DV-001520 - CAT II The application must require users to reauthenticate when organization-defined circumstances or situations require reauthentication.	0	0
APSC-DV-001530 - CAT II The application must require devices to reauthenticate when organization-defined circumstances or situations requiring reauthentication.	0	0
APSC-DV-001540 - CAT I The application must uniquely identify and authenticate organizational users (or processes acting on behalf of organizational users).	0	0
APSC-DV-001550 - CAT II The application must use multifactor (Alt. Token) authentication for network access to privileged accounts.	0	0
APSC-DV-001560 - CAT II The application must accept Personal Identity Verification (PIV) credentials.	0	0
APSC-DV-001580 - CAT II The application must use multifactor (e.g., CAC, Alt. Token) authentication for network access to non-privileged accounts.	0	0
APSC-DV-001590 - CAT II The application must use multifactor (Alt. Token) authentication for local access to privileged accounts.	0	0
APSC-DV-001600 - CAT II The application must use multifactor (e.g., CAC, Alt. Token) authentication for local access to non-privileged accounts.	0	0
APSC-DV-001610 - CAT II The application must ensure users are authenticated with an individual authenticator prior to using a group authenticator.	0	0
APSC-DV-001620 - CAT II The application must implement replay-resistant authentication mechanisms for network access to privileged accounts.	0	0
APSC-DV-001630 - CAT II The application must implement replay-resistant authentication mechanisms for network access to non-privileged accounts.	0	0
APSC-DV-001640 - CAT II The application must utilize mutual authentication when endpoint device non-repudiation protections are required by DoD policy or by the data owner.	0	0
APSC-DV-001650 - CAT II The application must authenticate all network connected endpoint devices before establishing any connection.	0	0
APSC-DV-001660 - CAT II Service-Oriented Applications handling non-releasable data must authenticate endpoint devices via mutual SSL/TLS.	0	0
APSC-DV-001670 - CAT II The application must disable device identifiers after 35 days of inactivity unless a cryptographic certificate is used for authentication.	0	0
APSC-DV-001680 - CAT I The application must enforce a minimum 15-character password length.**	0	0
APSC-DV-001690 - CAT II The application must enforce password complexity by requiring that at least one upper-case character be used.	0	0
APSC-DV-001700 - CAT II The application must enforce password complexity by requiring that at least one lower-case character be used.	0	0
APSC-DV-001710 - CAT II The application must enforce password complexity by requiring that at least one numeric character be used.	0	0
APSC-DV-001720 - CAT II The application must enforce password complexity by requiring that at least one special character be used.	0	0
APSC-DV-001730 - CAT II The application must require the change of at least 8 of the total number of characters when passwords are changed.	0	0
APSC-DV-001740 - CAT I The application must only store cryptographic representations of passwords.**	1	1
APSC-DV-001850 - CAT I The application must not display passwords/PINs as clear text.	0	0
APSC-DV-001750 - CAT I The application must transmit only cryptographically-protected passwords.	0	0
APSC-DV-001760 - CAT II The application must enforce 24 hours/1 day as the minimum password lifetime.	0	0
APSC-DV-001770 - CAT II The application must enforce a 60-day maximum password lifetime restriction.	0	0
APSC-DV-001780 - CAT II The application must prohibit password reuse for a minimum of five generations.	0	0

APSC-DV-001790 - CAT II The application must allow the use of a temporary password for system logons with an immediate change to a permanent password.	0	0
APSC-DV-001795 - CAT II The application password must not be changeable by users other than the administrator or the user with which the password is associated.	0	0
APSC-DV-001800 - CAT II The application must terminate existing user sessions upon account deletion.	0	0
APSC-DV-001820 - CAT I The application, when using PKI-based authentication, must enforce authorized access to the corresponding private key.	0	0
APSC-DV-001830 - CAT II The application must map the authenticated identity to the individual user or group account for PKI-based authentication.	0	0
APSC-DV-001870 - CAT II The application must uniquely identify and authenticate non-organizational users (or processes acting on behalf of non-organizational users).	0	0
APSC-DV-001810 - CAT I The application, when utilizing PKI-based authentication, must validate certificates by constructing a certification path (which includes status information) to an accepted trust anchor.	0	0
APSC-DV-001840 - CAT II The application, for PKI-based authentication, must implement a local cache of revocation data to support path discovery and validation in case of the inability to access revocation information via the network.	0	0
APSC-DV-001860 - CAT II The application must use mechanisms meeting the requirements of applicable federal laws, Executive Orders, directives, policies, regulations, standards, and guidance for authentication to a cryptographic module.	0	0
APSC-DV-001880 - CAT II The application must accept Personal Identity Verification (PIV) credentials from other federal agencies.	0	0
APSC-DV-001890 - CAT II The application must electronically verify Personal Identity Verification (PIV) credentials from other federal agencies.	0	0
APSC-DV-002050 - CAT II Applications making SAML assertions must use FIPS-approved random numbers in the generation of SessionIndex in the SAML element AuthnStatement.	0	0
APSC-DV-001900 - CAT II The application must accept FICAM-approved third-party credentials.	0	0
APSC-DV-001910 - CAT II The application must conform to FICAM-issued profiles.	0	0
APSC-DV-001930 - CAT II Applications used for non-local maintenance sessions must audit non-local maintenance and diagnostic sessions for organization-defined auditable events.	0	0
APSC-DV-000310 - CAT III The application must have a process, feature or function that prevents removal or disabling of emergency accounts.	0	0
APSC-DV-001940 - CAT II Applications used for non-local maintenance sessions must implement cryptographic mechanisms to protect the integrity of non-local maintenance and diagnostic communications.	0	0
APSC-DV-001950 - CAT II Applications used for non-local maintenance sessions must implement cryptographic mechanisms to protect the confidentiality of non-local maintenance and diagnostic communications.	0	0
APSC-DV-001960 - CAT II Applications used for non-local maintenance sessions must verify remote disconnection at the termination of non-local maintenance and diagnostic sessions.	0	0
APSC-DV-001970 - CAT II The application must employ strong authenticators in the establishment of non-local maintenance and diagnostic sessions.	0	0
APSC-DV-001980 - CAT II The application must terminate all sessions and network connections when non-local maintenance is completed.	0	0
APSC-DV-001995 - CAT II The application must not be vulnerable to race conditions.	0	0
APSC-DV-002000 - CAT II The application must terminate all network connections associated with a communications session at the end of the session.	0	0
APSC-DV-002010 - CAT II The application must implement NSA-approved cryptography to protect classified information in accordance with applicable federal laws, Executive Orders, directives, policies, regulations, and standards.	0	0
APSC-DV-002020 - CAT II The application must utilize FIPS-validated cryptographic modules when signing application components.	0	0
APSC-DV-002030 - CAT II The application must utilize FIPS-validated cryptographic modules when generating cryptographic hashes.	0	0

APSC-DV-002040 - CAT II The application must utilize FIPS-validated cryptographic modules when protecting unclassified information that requires cryptographic protection.	0	0
APSC-DV-002150 - CAT II The application user interface must be either physically or logically separated from data storage and management interfaces.	0	0
APSC-DV-002210 - CAT II The application must set the HTTPOnly flag on session cookies.	0	0
APSC-DV-002220 - CAT II The application must set the secure flag on session cookies.	0	0
APSC-DV-002230 - CAT I The application must not expose session IDs.	0	0
APSC-DV-002240 - CAT I The application must destroy the session ID value and/or cookie on logoff or browser close.	0	0
APSC-DV-002250 - CAT II Applications must use system-generated session identifiers that protect against session fixation.	0	0
APSC-DV-002260 - CAT II Applications must validate session identifiers.	0	0
APSC-DV-002270 - CAT II Applications must not use URL embedded session IDs.	0	0
APSC-DV-002280 - CAT II The application must not re-use or recycle session IDs.	0	0
APSC-DV-002290 - CAT II The application must use the Federal Information Processing Standard (FIPS) 140-2-validated cryptographic modules and random number generator if the application implements encryption, key exchange, digital signature, and hash functionality.**	0	0
APSC-DV-002300 - CAT II The application must only allow the use of DoD-approved certificate authorities for verification of the establishment of protected sessions.	0	0
APSC-DV-002310 - CAT I The application must fail to a secure state if system initialization fails, shutdown fails, or aborts fail.	0	0
APSC-DV-002320 - CAT II In the event of a system failure, applications must preserve any information necessary to determine cause of failure and any information necessary to return to operations with least disruption to mission processes.	0	0
APSC-DV-002330 - CAT II The application must protect the confidentiality and integrity of stored information when required by DoD policy or the information owner.**	0	0
APSC-DV-002340 - CAT II The application must implement approved cryptographic mechanisms to prevent unauthorized modification of organization-defined information at rest on organization-defined information system components.	0	0
APSC-DV-002350 - CAT II The application must use appropriate cryptography in order to protect stored DoD information when required by the information owner or DoD policy.	0	0
APSC-DV-002360 - CAT II The application must isolate security functions from non-security functions.	0	0
APSC-DV-002370 - CAT II The application must maintain a separate execution domain for each executing process.	0	0
APSC-DV-002380 - CAT II Applications must prevent unauthorized and unintended information transfer via shared system resources.	0	0
APSC-DV-002390 - CAT II XML-based applications must mitigate DoS attacks by using XML filters, parser options, or gateways.	0	0
APSC-DV-002400 - CAT II The application must restrict the ability to launch Denial of Service (DoS) attacks against itself or other information systems.	0	0
APSC-DV-002410 - CAT II The web service design must include redundancy mechanisms when used with high-availability systems.	0	0
APSC-DV-002420 - CAT II An XML firewall function must be deployed to protect web services when exposed to untrusted networks.	0	0
APSC-DV-002610 - CAT II The application must remove organization-defined software components after updated versions have been installed.	0	0
APSC-DV-002440 - CAT I The application must protect the confidentiality and integrity of transmitted information.	0	0
APSC-DV-002450 - CAT II The application must implement cryptographic mechanisms to prevent unauthorized disclosure of information and/or detect changes to information during transmission unless otherwise protected by alternative physical safeguards, such as, at a minimum, a Prot	0	0
APSC-DV-002460 - CAT II The application must maintain the confidentiality and integrity of	0	0

information during preparation for transmission.		
APSC-DV-002470 - CAT II The application must maintain the confidentiality and integrity of information during reception.	0	0
APSC-DV-002480 - CAT II The application must not disclose unnecessary information to users.	0	0
APSC-DV-002485 - CAT I The application must not store sensitive information in hidden fields.	5	1
APSC-DV-002490 - CAT I The application must protect from Cross-Site Scripting (XSS) vulnerabilities.**	0	0
APSC-DV-002500 - CAT II The application must protect from Cross-Site Request Forgery (CSRF) vulnerabilities.	0	0
APSC-DV-002510 - CAT I The application must protect from command injection.	4	4
APSC-DV-002520 - CAT II The application must protect from canonical representation vulnerabilities.	0	0
APSC-DV-002530 - CAT II The application must validate all input.	0	0
APSC-DV-002540 - CAT I The application must not be vulnerable to SQL Injection.	0	0
APSC-DV-002550 - CAT I The application must not be vulnerable to XML-oriented attacks.	0	0
APSC-DV-002560 - CAT I The application must not be subject to input handling vulnerabilities.**	0	0
APSC-DV-002570 - CAT II The application must generate error messages that provide information necessary for corrective actions without revealing information that could be exploited by adversaries.	187	176
APSC-DV-002580 - CAT II The application must reveal error messages only to the ISSO, ISSM, or SA.	0	0
APSC-DV-002590 - CAT I The application must not be vulnerable to overflow attacks.	0	0
APSC-DV-002630 - CAT II Security-relevant software updates and patches must be kept up to date.	0	0
APSC-DV-002760 - CAT II The application performing organization-defined security functions must verify correct operation of security functions.	0	0
APSC-DV-002900 - CAT II The ISSO must ensure application audit trails are retained for at least 1 year for applications without SAMI data, and 5 years for applications including SAMI data.	0	0
APSC-DV-002770 - CAT II The application must perform verification of the correct operation of security functions: upon system startup and/or restart; upon command by a user with privileged access; and/or every 30 days.	0	0
APSC-DV-002780 - CAT III The application must notify the ISSO and ISSM of failed security verification tests.	0	0
APSC-DV-002870 - CAT II Unsigned Category 1A mobile code must not be used in the application in accordance with DoD policy.	0	0
APSC-DV-002880 - CAT II The ISSO must ensure an account management process is implemented, verifying only authorized users can gain access to the application, and individual accounts designated as inactive, suspended, or terminated are promptly removed.	0	0
APSC-DV-002890 - CAT I Application web servers must be on a separate network segment from the application and database servers if it is a tiered application operating in the DoD DMZ.	0	0
APSC-DV-002910 - CAT II The ISSO must review audit trails periodically based on system documentation recommendations or immediately upon system security events.	0	0
APSC-DV-002920 - CAT II The ISSO must report all suspected violations of IA policies in accordance with DoD information system IA procedures.	0	0
APSC-DV-002930 - CAT II The ISSO must ensure active vulnerability testing is performed.	0	0
APSC-DV-002980 - CAT II New IP addresses, data services, and associated ports used by the application must be submitted to the appropriate approving authority for the organization, which in turn will be submitted through the DoD Ports, Protocols, and Services Management (DoD PPS	0	0
APSC-DV-002950 - CAT II Execution flow diagrams and design documents must be created	0	0

to show how deadlock and recursion issues in web services are being mitigated.		
APSC-DV-002960 - CAT II The designer must ensure the application does not store configuration and control files in the same directory as user data.	0	0
APSC-DV-002970 - CAT II The ISSO must ensure if a DoD STIG or NSA guide is not available, a third-party product will be configured by following available guidance.	0	0
APSC-DV-002990 - CAT II The application must be registered with the DoD Ports and Protocols Database.	0	0
APSC-DV-002995 - CAT II The Configuration Management (CM) repository must be properly patched and STIG compliant.	0	0
APSC-DV-003000 - CAT II Access privileges to the Configuration Management (CM) repository must be reviewed every three months.	0	0
APSC-DV-003010 - CAT II A Software Configuration Management (SCM) plan describing the configuration control and change management process of application objects developed by the organization and the roles and responsibilities of the organization must be created and maintained.	0	0
APSC-DV-003020 - CAT II A Configuration Control Board (CCB) that meets at least every release cycle, for managing the Configuration Management (CM) process must be established.	0	0
APSC-DV-003030 - CAT II The application services and interfaces must be compatible with and ready for IPv6 networks.	0	0
APSC-DV-003040 - CAT II The application must not be hosted on a general purpose machine if the application is designated as critical or high availability by the ISSO.	0	0
APSC-DV-003050 - CAT II A disaster recovery/continuity plan must exist in accordance with DoD policy based on the applications availability requirements.	0	0
APSC-DV-003060 - CAT II Recovery procedures and technical system features must exist so recovery is performed in a secure and verifiable manner. The ISSO will document circumstances inhibiting a trusted recovery.	0	0
APSC-DV-003070 - CAT II Data backup must be performed at required intervals in accordance with DoD policy.	0	0
APSC-DV-003080 - CAT II Back-up copies of the application software or source code must be stored in a fire-rated container or stored separately (offsite).	0	0
APSC-DV-003090 - CAT II Procedures must be in place to assure the appropriate physical and technical protection of the backup and restoration of the application.	0	0
APSC-DV-003100 - CAT II The application must use encryption to implement key exchange and authenticate endpoints prior to establishing a communication channel for key exchange.	0	0
APSC-DV-003110 - CAT I The application must not contain embedded authentication data.	0	0
APSC-DV-003120 - CAT I The application must have the capability to mark sensitive/classified output when required.	0	0
APSC-DV-003130 - CAT III Prior to each release of the application, updates to system, or applying patches; tests plans and procedures must be created and executed.	0	0
APSC-DV-003150 - CAT II At least one tester must be designated to test for security flaws in addition to functional testing.	0	0
APSC-DV-003140 - CAT II Application files must be cryptographically hashed prior to deploying to DoD operational networks.	0	0
APSC-DV-003160 - CAT III Test procedures must be created and at least annually executed to ensure system initialization, shutdown, and aborts are configured to verify the system remains in a secure state.	0	0
APSC-DV-003170 - CAT II An application code review must be performed on the application.	0	0
APSC-DV-003180 - CAT III Code coverage statistics must be maintained for each release of the application.	0	0
APSC-DV-003190 - CAT II Flaws found during a code review must be tracked in a defect tracking system.	0	0
APSC-DV-003200 - CAT II The changes to the application must be assessed for IA and accreditation impact prior to implementation.	0	0
APSC-DV-003210 - CAT II Security flaws must be fixed or addressed in the project plan.	0	0

APSC-DV-003215 - CAT III The application development team must follow a set of coding standards.	0	0
APSC-DV-003220 - CAT III The designer must create and update the Design Document for each release of the application.	0	0
APSC-DV-003230 - CAT II Threat models must be documented and reviewed for each application release and updated as required by design and functionality changes or when new threats are discovered.	0	0
APSC-DV-003235 - CAT II The application must not be subject to error handling vulnerabilities.	0	0
APSC-DV-003250 - CAT I The application must be decommissioned when maintenance or support is no longer available.	0	0
APSC-DV-003236 - CAT II The application development team must provide an application incident response plan.	0	0
APSC-DV-003240 - CAT I All products must be supported by the vendor or the development team.	0	0
APSC-DV-003260 - CAT III Procedures must be in place to notify users when an application is decommissioned.	0	0
APSC-DV-003270 - CAT II Unnecessary built-in application accounts must be disabled.	0	0
APSC-DV-003280 - CAT I Default passwords must be changed.	0	0
APSC-DV-003330 - CAT II The system must alert an administrator when low resource conditions are encountered.	0	0
APSC-DV-003285 - CAT II An Application Configuration Guide must be created and included with the application.	0	0
APSC-DV-003290 - CAT II If the application contains classified data, a Security Classification Guide must exist containing data elements and their classification.	0	0
APSC-DV-003300 - CAT II The designer must ensure uncategorized or emerging mobile code is not used in applications.	0	0
APSC-DV-003310 - CAT II Production database exports must have database administration credentials and sensitive data removed before releasing the export.	0	0
APSC-DV-003320 - CAT II Protections against DoS attacks must be implemented.	0	0
APSC-DV-003340 - CAT III At least one application administrator must be registered to receive update notifications, or security alerts, when automated alerts are available.	0	0
APSC-DV-003360 - CAT III The application must generate audit records when concurrent logons from different workstations occur.	0	0
APSC-DV-003345 - CAT III The application must provide notifications or alerts when product update and security related patches are available.	0	0
APSC-DV-003350 - CAT II Connections between the DoD enclave and the Internet or other public or commercial wide area networks must require a DMZ.	0	0
APSC-DV-003400 - CAT II The Program Manager must verify all levels of program management, designers, developers, and testers receive annual security training pertaining to their job function.	0	0
APSC-DV-000010 - CAT II The application must provide a capability to limit the number of logon sessions per user.	0	0
APSC-DV-000060 - CAT II The application must clear temporary storage and cookies when the session is terminated.	0	0
APSC-DV-000070 - CAT II The application must automatically terminate the non-privileged user session and log off non-privileged users after a 15 minute idle time period has elapsed.	0	0
APSC-DV-000080 - CAT II The application must automatically terminate the admin user session and log off admin users after a 10 minute idle time period is exceeded.	0	0
APSC-DV-000090 - CAT II Applications requiring user access authentication must provide a logoff capability for user initiated communication session.	0	0
APSC-DV-000100 - CAT III The application must display an explicit logoff message to users indicating the reliable termination of authenticated communications sessions.	0	0
APSC-DV-000110 - CAT II The application must associate organization-defined types of security attributes having organization-defined security attribute values with information in	0	0

storage.		
APSC-DV-000120 - CAT II The application must associate organization-defined types of security attributes having organization-defined security attribute values with information in process.	0	0
APSC-DV-000130 - CAT II The application must associate organization-defined types of security attributes having organization-defined security attribute values with information in transmission.	0	0
APSC-DV-000160 - CAT II The application must implement DoD-approved encryption to protect the confidentiality of remote access sessions.	0	0
APSC-DV-000170 - CAT II The application must implement cryptographic mechanisms to protect the integrity of remote access sessions.	0	0
APSC-DV-000190 - CAT I Messages protected with WS_Security must use time stamps with creation and expiration times.	0	0
APSC-DV-000180 - CAT II Applications with SOAP messages requiring integrity must include the following message elements:-Message ID-Service Request-Timestamp-SAML Assertion (optionally included in messages) and all elements of the message must be digitally signed.	0	0
APSC-DV-000200 - CAT I Validity periods must be verified on all application messages using WS-Security or SAML assertions.	0	0
APSC-DV-000210 - CAT II The application must ensure each unique asserting party provides unique assertion ID references for each SAML assertion.	0	0
APSC-DV-000220 - CAT II The application must ensure encrypted assertions, or equivalent confidentiality protections are used when assertion data is passed through an intermediary, and confidentiality of the assertion data is required when passing through the intermediary.	0	0
APSC-DV-000230 - CAT I The application must use the NotOnOrAfter condition when using the SubjectConfirmation element in a SAML assertion.	0	0
APSC-DV-000240 - CAT I The application must use both the NotBefore and NotOnOrAfter elements or OneTimeUse element when using the Conditions element in a SAML assertion.	0	0
APSC-DV-000250 - CAT II The application must ensure if a OneTimeUse element is used in an assertion, there is only one of the same used in the Conditions element portion of an assertion.	0	0
APSC-DV-000260 - CAT II The application must ensure messages are encrypted when the SessionIndex is tied to privacy data.	0	0
APSC-DV-000290 - CAT II Shared/group account credentials must be terminated when members leave the group.	0	0
APSC-DV-000280 - CAT II The application must provide automated mechanisms for supporting account management functions.	0	0
APSC-DV-000300 - CAT II The application must automatically remove or disable temporary user accounts 72 hours after account creation.	0	0
APSC-DV-000320 - CAT III The application must automatically disable accounts after a 35 day period of account inactivity.	0	0
APSC-DV-000330 - CAT II Unnecessary application accounts must be disabled, or deleted.	0	0
APSC-DV-000420 - CAT II The application must automatically audit account enabling actions.	0	0
APSC-DV-000340 - CAT II The application must automatically audit account creation.	0	0
APSC-DV-000350 - CAT II The application must automatically audit account modification.	0	0
APSC-DV-000360 - CAT II The application must automatically audit account disabling actions.	0	0
APSC-DV-000370 - CAT II The application must automatically audit account removal actions.	0	0
APSC-DV-000380 - CAT III The application must notify System Administrators and Information System Security Officers when accounts are created.	0	0
APSC-DV-000390 - CAT III The application must notify System Administrators and Information System Security Officers when accounts are modified.	0	0
APSC-DV-000400 - CAT III The application must notify System Administrators and Information System Security Officers of account disabling actions.	0	0

APSC-DV-000410 - CAT III The application must notify System Administrators and Information System Security Officers of account removal actions.	0	0
APSC-DV-000430 - CAT III The application must notify System Administrators and Information System Security Officers of account enabling actions.	0	0
APSC-DV-000440 - CAT II Application data protection requirements must be identified and documented.	0	0
APSC-DV-000520 - CAT II The application must audit the execution of privileged functions.	0	0
APSC-DV-000450 - CAT II The application must utilize organization-defined data mining detection techniques for organization-defined data storage objects to adequately detect data mining attempts.	0	0
APSC-DV-000460 - CAT I The application must enforce approved authorizations for logical access to information and system resources in accordance with applicable access control policies.	0	0
APSC-DV-000470 - CAT II The application must enforce organization-defined discretionary access control policies over defined subjects and objects.	0	0
APSC-DV-000480 - CAT II The application must enforce approved authorizations for controlling the flow of information within the system based on organization-defined information flow control policies.	0	0
APSC-DV-000490 - CAT II The application must enforce approved authorizations for controlling the flow of information between interconnected systems based on organization-defined information flow control policies.	0	0
APSC-DV-000500 - CAT II The application must prevent non-privileged users from executing privileged functions to include disabling, circumventing, or altering implemented security safeguards/countermeasures.	0	0
APSC-DV-000510 - CAT I The application must execute without excessive account permissions.	0	0
APSC-DV-000530 - CAT I The application must enforce the limit of three consecutive invalid logon attempts by a user during a 15 minute time period.	0	0
APSC-DV-000560 - CAT III The application must retain the Standard Mandatory DoD Notice and Consent Banner on the screen until users acknowledge the usage conditions and take explicit actions to log on for further access.	0	0
APSC-DV-000540 - CAT II The application administrator must follow an approved process to unlock locked user accounts.	0	0
APSC-DV-000550 - CAT III The application must display the Standard Mandatory DoD Notice and Consent Banner before granting access to the application.	0	0
APSC-DV-000570 - CAT III The publicly accessible application must display the Standard Mandatory DoD Notice and Consent Banner before granting access to the application.	0	0
APSC-DV-000580 - CAT III The application must display the time and date of the users last successful logon.	0	0
APSC-DV-000630 - CAT II The application must provide audit record generation capability for the destruction of session IDs.	0	0
APSC-DV-000590 - CAT II The application must protect against an individual (or process acting on behalf of an individual) falsely denying having performed organization-defined actions to be covered by non-repudiation.	0	0
APSC-DV-000600 - CAT II For applications providing audit record aggregation, the application must compile audit records from organization-defined information system components into a system-wide audit trail that is time-correlated with an organization-defined level of tolerance	0	0
APSC-DV-000610 - CAT II The application must provide the capability for organization-identified individuals or roles to change the auditing to be performed on all application components, based on all selectable event criteria within organization-defined time thresholds.	0	0
APSC-DV-000620 - CAT II The application must provide audit record generation capability for the creation of session IDs.	0	0

* Best fix location values are absolute values derived from the entire vulnerabilities detected.
** Please note, the report only includes the presets/filters you applied to the scan results.

Scan Summary - OWASP Top 10 API 2023

Category	Issues Found	Best Fix Locations*
API1-Broken Object Level Authorization	0	0
API2-Broken Authentication**	1	1
API3-Broken Object Property Level Authorization	0	0
API4-Unrestricted Resource Consumption	0	0
API5-Broken Function Level Authorization	0	0
API6-Unrestricted Access to Sensitive Business Flows	0	0
API7-Server Side Request Forgery	0	0
API8-Security Misconfiguration	187	176
API9-Improper Inventory Management	0	0
API10-Unsafe Consumption of APIs	0	0

* Best fix location values are absolute values derived from the entire vulnerabilities detected.
** Please note, the report only includes the presets/filters you applied to the scan results.

Scan Summary - MOIS(KISA) Secure Coding 2021

Category	Issues Found	Best Fix Locations*
MOIS(KISA) API misuse	0	0
MOIS(KISA) Code error	0	0
MOIS(KISA) Encapsulation	0	0
MOIS(KISA) Error processing	187	176
MOIS(KISA) Security Functions**	25	11
MOIS(KISA) Time and status	0	0
MOIS(KISA) Verification and representation of input data**	4	4

* Best fix location values are absolute values derived from the entire vulnerabilities detected.
** Please note, the report only includes the presets/filters you applied to the scan results.

Scan Summary - SANS top 25

Category	Issues Found	Best Fix Locations*
SANS top 25**	207	186

* Best fix location values are absolute values derived from the entire vulnerabilities detected.
** Please note, the report only includes the presets/filters you applied to the scan results.

Scan Summary - CWE top 25

Category	Issues Found	Best Fix Locations*
CWE top 25**	19	13

* Best fix location values are absolute values derived from the entire vulnerabilities detected.
** Please note, the report only includes the presets/filters you applied to the scan results.

Scan Summary - Top Tier

Category	Issues Found	Best Fix Locations*
Top Tier	29	12

* Best fix location values are absolute values derived from the entire vulnerabilities detected.

Scan Summary - OWASP ASVS

Category	Issues Found	Best Fix Locations*
V01 Architecture, Design and Threat Modeling	0	0
V02 Authentication**	1	1
V03 Session Management	0	0
V04 Access Control	0	0
V05 Validation, Sanitization and Encoding**	0	0
V06 Stored Cryptography**	5	1
V07 Error Handling and Logging**	20	7
V08 Data Protection	19	9
V09 Communication	0	0
V10 Malicious Code**	0	0
V11 Business Logic	0	0
V12 Files and Resources	0	0
V13 API and Web Service	0	0
V14 Configuration	188	177

* Best fix location values are absolute values derived from the entire vulnerabilities detected.
** Please note, the report only includes the presets/filters you applied to the scan results.

Scan Summary - ASA Mobile Premium

Category	Issues Found	Best Fix Locations*
ASA Mobile Premium**	0	0

* Best fix location values are absolute values derived from the entire vulnerabilities detected.
** Please note, the report only includes the presets/filters you applied to the scan results.

Scan Summary - ASA Premium

Category	Issues Found	Best Fix Locations*
ASA Premium**	36	15

* Best fix location values are absolute values derived from the entire vulnerabilities detected.
** Please note, the report only includes the presets/filters you applied to the scan results.

Scan Summary - Base Preset

Category	Issues Found	Best Fix Locations*
Base Preset	5	5

* Best fix location values are absolute values derived from the entire vulnerabilities detected.

Scan Summary - OWASP Top 10 2013

Further details and elaboration about vulnerabilities and risks can be found at: OWASP Top 10 2013

Category	Threat Agent	Attack Vectors	Weakness Prevalence	Weakness Detectability	Technical Impact	Business Impact	Issues Found	Best Fix Locations *
A1-Injection	EXTERNAL, INTERNAL, ADMIN USERS	EASY	COMMON	AVERAGE	SEVERE	ALL DATA	4	4
A2-Broken Authentication and Session Management**	EXTERNAL, INTERNAL USERS	AVERAGE	WIDESPREAD	AVERAGE	SEVERE	AFFECTED DATA AND FUNCTIONS	1	1
A3-Cross-Site Scripting (XSS)**	EXTERNAL, INTERNAL, ADMIN USERS	AVERAGE	VERY WIDESPREAD	EASY	MODERATE	AFFECTED DATA AND SYSTEM	0	0
A4-Insecure Direct Object References**	SYSTEM USERS	EASY	COMMON	EASY	MODERATE	EXPOSED DATA	0	0
A5-Security Misconfiguration	EXTERNAL, INTERNAL, ADMIN USERS	EASY	COMMON	EASY	MODERATE	ALL DATA AND SYSTEM	187	176
A6-Sensitive Data Exposure**	EXTERNAL, INTERNAL, ADMIN USERS, USERS BROWSERS	DIFFICULT	UNCOMMON	AVERAGE	SEVERE	EXPOSED DATA	25	8
A7-Missing Function Level Access Control	EXTERNAL, INTERNAL USERS	EASY	COMMON	AVERAGE	MODERATE	EXPOSED DATA AND FUNCTIONS	0	0
A8-Cross-Site Request Forgery (CSRF)	USERS BROWSERS	AVERAGE	COMMON	EASY	MODERATE	AFFECTED DATA AND FUNCTIONS	0	0
A9-Using Components with Known Vulnerabilities	EXTERNAL USERS, AUTOMATED TOOLS	AVERAGE	WIDESPREAD	DIFFICULT	MODERATE	AFFECTED DATA AND FUNCTIONS	0	0
A10-Unvalidated Redirects and Forwards	USERS BROWSERS	AVERAGE	WIDESPREAD	DIFFICULT	MODERATE	AFFECTED DATA AND FUNCTIONS	0	0

* Best fix location values are absolute values derived from the entire vulnerabilities detected.
** Please note, the report only includes the presets/filters you applied to the scan results.

Scan Summary - OWASP Top 10 API

Category	Issues Found	Best Fix Locations*
API1-Broken Object Level Authorization	0	0
API2-Broken Authentication	0	0
API3-Excessive Data Exposure	0	0
API4-Lack of Resources and Rate Limiting	0	0
API5-Broken Function Level Authorization	0	0
API6-Mass Assignment	0	0
API7-Security Misconfiguration	0	0
API8-Injection	0	0
API9-Improper Assets Management	0	0
API10-Insufficient Logging and Monitoring	0	0

* Best fix location values are absolute values derived from the entire vulnerabilities detected.

Scan Summary - OWASP Top 10 2010


Category	Issues Found	Best Fix Locations*
A1-Injection	0	0
A2-Cross-Site Scripting (XSS)**	0	0
A3-Broken Authentication and Session Management	0	0
A4-Insecure Direct Object References	0	0
A5-Cross-Site Request Forgery (CSRF)	0	0
A6-Security Misconfiguration	0	0
A7-Insecure Cryptographic Storage**	0	0
A8-Failure to Restrict URL Access	0	0
A9-Insufficient Transport Layer Protection	0	0
A10-Unvalidated Redirects and Forwards	0	0

* Best fix location values are absolute values derived from the entire vulnerabilities detected.
** Please note, the report only includes the presets/filters you applied to the scan results.

Results Distribution By Status

First scan of the project

	Critical	High	Medium	Low	Information	Total
New Issues	4	0	12	221	0	237
Recurrent Issues	0	0	0	0	0	0
Total	4	0	12	221	0	237
Fixed Issues	0	0	0	0	0	0

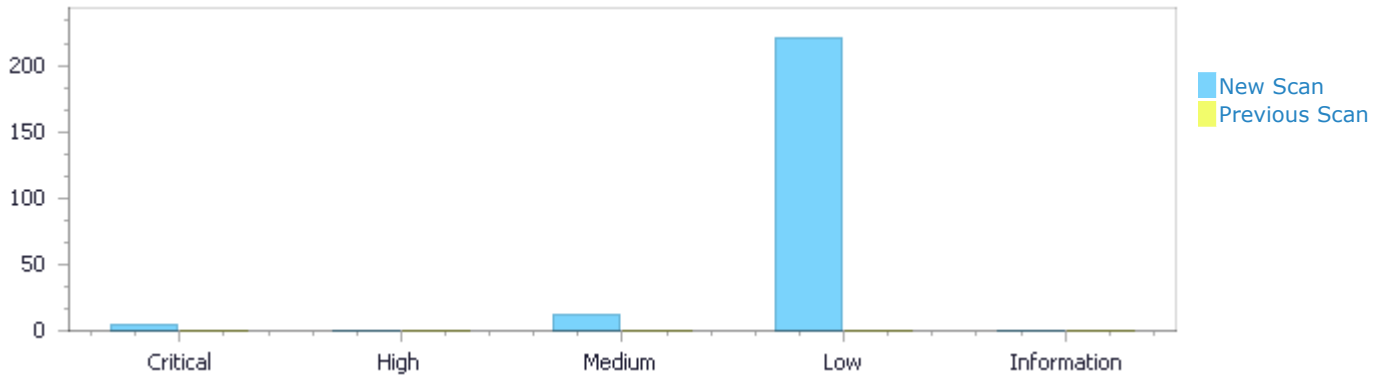

Results Distribution By State

	Critical	High	Medium	Low	Information	Total
To Verify	4	0	12	221	0	237
Not Exploitable	0	0	0	0	0	0
Confirmed	0	0	0	0	0	0
Urgent	0	0	0	0	0	0
Proposed Not Exploitable	0	0	0	0	0	0
Total	4	0	12	221	0	237

Result Summary

Vulnerability Type	Occurrences	Severity
Command Injection	4	Critical
Client HTML5 Store Sensitive data In Web Storage	5	Medium
Insecure Storage of Sensitive Data	5	Medium
Missing HSTS Header	1	Medium
Use Of Hardcoded Password	1	Medium
Information Exposure Through an Error Message	187	Low

Filtering Sensitive Logs	20	Low
Secret Leak in Error Messages	10	Low
Privacy Violation in Error Messages	3	Low
Secret Leak in Logs	1	Low

10 Most Vulnerable Files

Critical High and Medium Vulnerabilities

File Name	Issues Found
mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js	10
mahindragto-nashik-chatbot-pq-5464a1e870d5/scripts/create_users.py	4
mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/components/PartLabeler/PartLabeler.js	1
mahindragto-nashik-chatbot-pq-5464a1e870d5/scripts/data_loading.py	1

Scan Results Details

Command Injection

Query Path:
Python\Cx\Python Critical Risk\Command Injection Version:3

Categories

OWASP Top 10 2013: A1-Injection
FISMA 2014: System And Information Integrity
NIST SP 800-53: SI-10 Information Input Validation (P1)
OWASP Top 10 2017: A1-Injection
CWE top 25: CWE top 25
MOIS(KISA) Secure Coding 2021: MOIS(KISA) Verification and representation of input data
OWASP Top 10 2021: A3-Injection
PCI DSS v3.2.1: PCI DSS (3.2.1) - 6.5.1 - Injection flaws - particularly SQL injection
ASA Premium: ASA Premium
Top Tier: Top Tier
PCI DSS v4.0: PCI DSS (4.0) - 6.2.4 Vulnerabilities in software development
Base Preset: Base Preset
ASD STIG 6.1: APSC-DV-002510 - CAT I The application must protect from command injection.

Description

Command Injection\Path 1:

Severity	Critical
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=1
Status	New
Detection Date	11/2/2026 2:53:06 PM

The application's main method calls an OS (shell) command with input, at line 77 of mahindragto-nashik-chatbot-pq-5464a1e870d5/scripts/create_users.py, using an untrusted string with the command to execute.
This could allow an attacker to inject an arbitrary command, and enable a Command Injection attack.
The attacker may be able to inject the executed command via user input, input, which is retrieved by the application in the main method, at line 77 of mahindragto-nashik-chatbot-pq-5464a1e870d5/scripts/create_users.py.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/scripts/create_users.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/scripts/create_users.py
Line	77	77
Object	input	input

Code Snippet	
File Name	mahindragto-nashik-chatbot-pq-5464a1e870d5/scripts/create_users.py
Method	def main():

```
....
77.  username = args.username or input("Username: ").strip()
```

Command Injection\Path 2:

Severity	Critical
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=2
Status	New
Detection Date	11/2/2026 2:53:06 PM

The application's main method calls an OS (shell) command with input, at line 82 of mahindragto-nashik-chatbot-pq-5464a1e870d5/scripts/create_users.py, using an untrusted string with the command to execute.
This could allow an attacker to inject an arbitrary command, and enable a Command Injection attack.
The attacker may be able to inject the executed command via user input, input, which is retrieved by the application in the main method, at line 82 of mahindragto-nashik-chatbot-pq-5464a1e870d5/scripts/create_users.py.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/scripts/create_users.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/scripts/create_users.py
Line	82	82
Object	input	input

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/scripts/create_users.py
Method def main():

```
....
82.  email = args.email or input("Email: ").strip()
```

Command Injection\Path 3:

Severity	Critical
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=3
Status	New
Detection Date	11/2/2026 2:53:06 PM

The application's main method calls an OS (shell) command with input, at line 87 of mahindragto-nashik-chatbot-pq-5464a1e870d5/scripts/create_users.py, using an untrusted string with the command to execute.
This could allow an attacker to inject an arbitrary command, and enable a Command Injection attack.
The attacker may be able to inject the executed command via user input, input, which is retrieved by the application in the main method, at line 87 of mahindragto-nashik-chatbot-pq-5464a1e870d5/scripts/create_users.py.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/scripts/create_users.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/scripts/create_users.py
Line	87	87
Object	input	input

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/scripts/create_users.py
Method def main():

```
....
87.  first_name = args.first_name or input("First name [Admin]:
").strip() or "Admin"
```

Command Injection\Path 4:

Severity	Critical
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=4
Status	New
Detection Date	11/2/2026 2:53:06 PM

The application's main method calls an OS (shell) command with input, at line 88 of mahindragto-nashik-chatbot-pq-5464a1e870d5/scripts/create_users.py, using an untrusted string with the command to execute.
This could allow an attacker to inject an arbitrary command, and enable a Command Injection attack.
The attacker may be able to inject the executed command via user input, input, which is retrieved by the application in the main method, at line 88 of mahindragto-nashik-chatbot-pq-5464a1e870d5/scripts/create_users.py.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/scripts/create_users.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/scripts/create_users.py
Line	88	88
Object	input	input

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/scripts/create_users.py
Method def main():

```
....
88.  last_name  = args.last_name  or input("Last name  [User]:
").strip() or "User"
```

Client HTML5 Store Sensitive data In Web Storage

Query Path:
JavaScript\Cx\JavaScript Medium Threat\Client HTML5 Store Sensitive data In Web Storage Version:8

Categories

OWASP Top 10 2013: A6-Sensitive Data Exposure
FISMA 2014: Media Protection
NIST SP 800-53: SC-28 Protection of Information at Rest (P1)
OWASP Top 10 2017: A3-Sensitive Data Exposure
MOIS(KISA) Secure Coding 2021: MOIS(KISA) Security Functions
OWASP ASVS: V06 Stored Cryptography
OWASP Top 10 2021: A4-Insecure Design
PCI DSS v3.2.1: PCI DSS (3.2.1) - 6.5.10 - Broken authentication and session management
SANS top 25: SANS top 25
ASA Premium: ASA Premium
PCI DSS v4.0: PCI DSS (4.0) - 6.2.4 Vulnerabilities in software development
ASD STIG 6.1: APSC-DV-002485 - CAT I The application must not store sensitive information in hidden fields.

Description

Client HTML5 Store Sensitive data In Web Storage\Path 1:

Severity	Medium
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=5
Status	New
Detection Date	11/2/2026 2:53:22 PM

The application stores data data on the client, in an insecure manner, at line 61 of mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js
Line	50	61
Object	password	data

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js
Method async login(username, password) {

```
....
50.  body: JSON.stringify({ username, password }),
....
61.  sessionStorage.setItem("user_id", data.user_id);
```

Client HTML5 Store Sensitive data In Web Storage\Path 2:

Severity	Medium
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=6
Status	New
Detection Date	11/2/2026 2:53:22 PM

The application stores data data on the client, in an insecure manner, at line 62 of mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js
Line	50	62
Object	password	data

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js
Method async login(username, password) {

```
....
50.  body: JSON.stringify({ username, password }),
....
62.  sessionStorage.setItem("username", data.username);
```

Client HTML5 Store Sensitive data In Web Storage\Path 3:

Severity Medium
Result State To Verify
Online Results https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=7
Status New
Detection Date 11/2/2026 2:53:22 PM

The application stores data data on the client, in an insecure manner, at line 63 of mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js
Line	50	63
Object	password	data

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js
Method async login(username, password) {

```
....
50.  body: JSON.stringify({ username, password }),
....
63.  sessionStorage.setItem("first_name", data.first_name || "");
```

Client HTML5 Store Sensitive data In Web Storage\Path 4:

Severity Medium
Result State To Verify

Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=8
Status	New
Detection Date	11/2/2026 2:53:22 PM

The application stores data data on the client, in an insecure manner, at line 64 of mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js
Line	50	64
Object	password	data

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js

Method async login(username, password) {

```
....
50.  body: JSON.stringify({ username, password }),
....
64.  sessionStorage.setItem("last_name", data.last_name || "");
```

Client HTML5 Store Sensitive data In Web Storage\Path 5:

Severity	Medium
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=9
Status	New
Detection Date	11/2/2026 2:53:22 PM

The application stores data data on the client, in an insecure manner, at line 65 of mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js
Line	50	65
Object	password	data

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js

Method async login(username, password) {

```
....
50.  body: JSON.stringify({ username, password }),
....
65.  sessionStorage.setItem("role", data.role || "user");
```

Insecure Storage of Sensitive Data

Query Path:
JavaScript\Cx\JavaScript Server Side Vulnerabilities\Insecure Storage of Sensitive Data Version:9

Categories

MOIS(KISA) Secure Coding 2021: MOIS(KISA) Security Functions
OWASP ASVS: V08 Data Protection
OWASP Top 10 2021: A1-Broken Access Control
ASA Premium: ASA Premium
Top Tier: Top Tier

Description

Insecure Storage of Sensitive Data\Path 1:

Severity	Medium
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=12
Status	New
Detection Date	11/2/2026 2:53:24 PM

The application takes sensitive, personal data password, found at line 50 of mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js, and stores it in an unprotected manner, without encryption, to setItem at line 61 of mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js
Line	50	61
Object	password	setItem

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js
Method async login(username, password) {

```
....
50.  body: JSON.stringify({ username, password }),
....
61.  sessionStorage.setItem("user_id", data.user_id);
```

Insecure Storage of Sensitive Data\Path 2:

Severity	Medium
Result State	To Verify
Online Results	https://checkmarx.mahindra-

	ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=13
Status	New
Detection Date	11/2/2026 2:53:24 PM

The application takes sensitive, personal data password, found at line 50 of mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js, and stores it in an unprotected manner, without encryption, to setItem at line 62 of mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js
Line	50	62
Object	password	setItem

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js

Method async login(username, password) {

```
....
50.  body: JSON.stringify({ username, password }),
....
62.  sessionStorage.setItem("username", data.username);
```

Insecure Storage of Sensitive Data\Path 3:

Severity	Medium
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=14
Status	New
Detection Date	11/2/2026 2:53:24 PM

The application takes sensitive, personal data password, found at line 50 of mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js, and stores it in an unprotected manner, without encryption, to setItem at line 63 of mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js
Line	50	63
Object	password	setItem

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js

Method async login(username, password) {

```
....
50.  body: JSON.stringify({ username, password }),
....
63.  sessionStorage.setItem("first_name", data.first_name || "");
```

Insecure Storage of Sensitive Data\Path 4:

Severity	Medium
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=15
Status	New
Detection Date	11/2/2026 2:53:24 PM

The application takes sensitive, personal data password, found at line 50 of mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js, and stores it in an unprotected manner, without encryption, to setItem at line 64 of mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js
Line	50	64
Object	password	setItem

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js

Method async login(username, password) {

```
....
50.  body: JSON.stringify({ username, password }),
....
64.  sessionStorage.setItem("last_name", data.last_name || "");
```

Insecure Storage of Sensitive Data\Path 5:

Severity	Medium
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=16
Status	New
Detection Date	11/2/2026 2:53:24 PM

The application takes sensitive, personal data password, found at line 50 of mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js, and stores it in an unprotected manner, without encryption, to setItem at line 65 of mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-	mahindragto-nashik-chatbot-pq-

	5464a1e870d5/frontend/src/services/api/authService.js	5464a1e870d5/frontend/src/services/api/authService.js
Line	50	65
Object	password	setItem

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js
Method async login(username, password) {

```
....
50.  body: JSON.stringify({ username, password }),
....
65.  sessionStorage.setItem("role", data.role || "user");
```

Missing HSTS Header

Query Path:
JavaScript\Cx\JavaScript Medium Threat\Missing HSTS Header Version:7

Categories

OWASP ASVS: V14 Configuration
OWASP Top 10 2021: A7-Identification and Authentication Failures
ASA Premium: ASA Premium
PCI DSS v4.0: PCI DSS (4.0) - 6.2.4 Vulnerabilities in software development
Base Preset: Base Preset

Description
Missing HSTS Header\Path 1:

Severity	Medium
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=10
Status	New
Detection Date	11/2/2026 2:53:23 PM

The web-application does not define an HSTS header, leaving it vulnerable to attack.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/components/PartLabeler/PartLabeler.js	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/components/PartLabeler/PartLabeler.js
Line	786	786
Object	json	json

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/components/PartLabeler/PartLabeler.js
Method const fetchDashboardData = async (partNameArg = null, srcOverride = null) => {

```
....
786.  const data = await res.json();
```

Use Of Hardcoded Password

Query Path:
Python\Cx\Python Medium Threat\Use Of Hardcoded Password Version:3

Categories

OWASP Top 10 2013: A2-Broken Authentication and Session Management
FISMA 2014: Identification And Authentication
NIST SP 800-53: SC-28 Protection of Information at Rest (P1)
OWASP Top 10 2017: A2-Broken Authentication
CWE top 25: CWE top 25
MOIS(KISA) Secure Coding 2021: MOIS(KISA) Security Functions
OWASP ASVS: V02 Authentication
OWASP Top 10 2021: A7-Identification and Authentication Failures
SANS top 25: SANS top 25
ASA Premium: ASA Premium
PCI DSS v4.0: PCI DSS (4.0) - 8.6.2 Vulnerabilities related to passwords/passphrases usage
OWASP Top 10 API 2023: API2-Broken Authentication
ASD STIG 6.1: APSC-DV-001740 - CAT I The application must only store cryptographic representations of passwords.

Description

Use Of Hardcoded Password\Path 1:

Severity	Medium
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=11
Status	New
Detection Date	11/2/2026 2:53:24 PM

The application uses the hard-coded password "dataeaze@12345" for authentication purposes, either using it to verify users' identities, or to access another remote system. This password at line 14 of mahindragto-nashik-chatbot-pq-5464a1e870d5/scripts/data_loading.py appears in the code, implying it is accessible to anyone with source code access, and cannot be changed without rebuilding the application.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/scripts/data_loading.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/scripts/data_loading.py
Line	14	14
Object	"dataeaze@12345"	"dataeaze@12345"

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/scripts/data_loading.py
Method NEO4J_PASSWORD = "dataeaze@12345"

```
....
14.  NEO4J_PASSWORD = "dataeaze@12345"
```

Information Exposure Through an Error Message

Query Path:
Python\Cx\Python Low Visibility\Information Exposure Through an Error Message Version:2

Categories

OWASP Top 10 2013: A5-Security Misconfiguration
FISMA 2014: Configuration Management
NIST SP 800-53: SI-11 Error Handling (P2)
OWASP Top 10 2017: A6-Security Misconfiguration
MOIS(KISA) Secure Coding 2021: MOIS(KISA) Error processing
OWASP ASVS: V14 Configuration
OWASP Top 10 2021: A4-Insecure Design
SANS top 25: SANS top 25
PCI DSS v4.0: PCI DSS (4.0) - 6.2.4 Vulnerabilities in software development
OWASP Top 10 API 2023: API8-Security Misconfiguration
ASD STIG 6.1: APSC-DV-002570 - CAT II The application must generate error messages that provide information necessary for corrective actions without revealing information that could be exploited by adversaries.

Description

Information Exposure Through an Error Message\Path 1:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=37
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method stream, at line 291 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py, handles an Exception or runtime Error true. During the exception handling code, the application exposes the exception details to debug, in method stream of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py, line 291.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py
Line	291	291
Object	true	debug

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py
Method def stream(self, user_question: str) -> Generator[Dict[str, Any], None, None]:

```
....
291.  logger.debug(f"Error capturing tool calls: {e}", exc_info=True)
```

Information Exposure Through an Error Message\Path 2:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pa

	thid=38
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method stream, at line 290 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to debug, in method stream of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py, line 291.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py
Line	290	291
Object	e	debug

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py
Method def stream(self, user_question: str) -> Generator[Dict[str, Any], None, None]:

```
....
290.  except Exception as e:
291.  logger.debug(f"Error capturing tool calls: {e}", exc_info=True)
```

Information Exposure Through an Error Message\Path 3:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=39
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method stream, at line 296 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/standards_guidelines_agent.py, handles an Exception or runtime Error true. During the exception handling code, the application exposes the exception details to debug, in method stream of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/standards_guidelines_agent.py, line 296.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/standards_guidelines_agent.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/standards_guidelines_agent.py
Line	296	296
Object	true	debug

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/standards_guidelines_agent.py
Method def stream(self, user_question: str) -> Generator[Dict[str, Any], None, None]:

```
....
296.  logger.debug(f"Error capturing tool calls: {e}", exc_info=True)
```

Information Exposure Through an Error Message\Path 4:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=40
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method stream, at line 295 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/standards_guidelines_agent.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to debug, in method stream of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/standards_guidelines_agent.py, line 296.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/standards_guidelines_agent.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/standards_guidelines_agent.py
Line	295	296
Object	e	debug

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/standards_guidelines_agent.py
Method def stream(self, user_question: str) -> Generator[Dict[str, Any], None, None]:

```
....
295.  except Exception as e:
296.  logger.debug(f"Error capturing tool calls: {e}", exc_info=True)
```

Information Exposure Through an Error Message\Path 5:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=41
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method stream, at line 355 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/standards_guidelines_agent.py, handles an Exception or runtime Error true. During the exception handling code, the application exposes the exception details to error, in method stream of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/standards_guidelines_agent.py, line 355.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/standards_g	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/standards_g

	uidelines_agent.py	uidelines_agent.py
Line	355	355
Object	true	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/standards_guidelines_agent.py
Method def stream(self, user_question: str) -> Generator[Dict[str, Any], None, None]:

```
....
355.  logger.error(f"Error in Standards & Guidelines streaming: {e}",
exc_info=True)
```

Information Exposure Through an Error Message\Path 6:

Severity Low
Result State To Verify
Online Results https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=42
Status New
Detection Date 11/2/2026 2:53:25 PM

Method stream, at line 354 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/standards_guidelines_agent.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method stream of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/standards_guidelines_agent.py, line 355.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/standards_guidelines_agent.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/standards_guidelines_agent.py
Line	354	355
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/standards_guidelines_agent.py
Method def stream(self, user_question: str) -> Generator[Dict[str, Any], None, None]:

```
....
354.  except Exception as e:
355.  logger.error(f"Error in Standards & Guidelines streaming: {e}",
exc_info=True)
```

Information Exposure Through an Error Message\Path 7:

Severity Low
Result State To Verify
Online Results https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=43

Status	New
Detection Date	11/2/2026 2:53:25 PM

Method stream, at line 358 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_dashboard_agent.py, handles an Exception or runtime Error true. During the exception handling code, the application exposes the exception details to debug, in method stream of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_dashboard_agent.py, line 357.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_dashboard_agent.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_dashboard_agent.py
Line	358	357
Object	true	debug

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_dashboard_agent.py

Method def stream(self, user_question: str) -> Generator[Dict[str, Any], None, None]:

```
....
358.  f"Error capturing tool calls: {e}", exc_info=True
....
357.  logger.debug(
```

Information Exposure Through an Error Message\Path 8:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=44
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method stream, at line 356 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_dashboard_agent.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to debug, in method stream of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_dashboard_agent.py, line 357.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_dashboard_agent.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_dashboard_agent.py
Line	356	357
Object	e	debug

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_dashboard_agent.py

Method def stream(self, user_question: str) -> Generator[Dict[str, Any], None, None]:

```
....
356.  except Exception as e:
357.  logger.debug(
```

Information Exposure Through an Error Message\Path 9:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=45
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method stream, at line 391 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py, handles an Exception or runtime Error true. During the exception handling code, the application exposes the exception details to error, in method stream of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py, line 391.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py
Line	391	391
Object	true	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py
Method def stream(self, user_question: str) -> Generator[Dict[str, Any], None, None]:

```
....
391.  logger.error(f"Error in QLense streaming: {e}", exc_info=True)
```

Information Exposure Through an Error Message\Path 10:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=46
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method stream, at line 390 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method stream of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py, line 391.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py

Line	390	391
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py
Method def stream(self, user_question: str) -> Generator[Dict[str, Any], None, None]:

```
....
390.  except Exception as e:
391.  logger.error(f"Error in QLense streaming: {e}", exc_info=True)
```

Information Exposure Through an Error Message\Path 11:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=47
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method stream, at line 426 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_dashboard_agent.py, handles an Exception or runtime Error true. During the exception handling code, the application exposes the exception details to error, in method stream of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_dashboard_agent.py, line 425.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_dashboard_agent.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_dashboard_agent.py
Line	426	425
Object	true	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_dashboard_agent.py
Method def stream(self, user_question: str) -> Generator[Dict[str, Any], None, None]:

```
....
426.  f"Error in Part Labeler Dashboard streaming: {e}", exc_info=True
....
425.  logger.error(
```

Information Exposure Through an Error Message\Path 12:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=48
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method stream, at line 424 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_dashboard_agent.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method stream of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_dashboard_agent.py, line 425.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_dashboard_agent.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_dashboard_agent.py
Line	424	425
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_dashboard_agent.py
Method def stream(self, user_question: str) -> Generator[Dict[str, Any], None, None]:

```
....
424.  except Exception as e:
425.  logger.error(
```

Information Exposure Through an Error Message\Path 13:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=49
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method stream, at line 502 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py, handles an Exception or runtime Error true. During the exception handling code, the application exposes the exception details to debug, in method stream of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py, line 502.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py
Line	502	502
Object	true	debug

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py
Method def stream(self, user_question: str) -> Generator[Dict[str, Any], None, None]:

```
....
502.  logger.debug(f"Error capturing tool calls: {e}", exc_info=True)
```

Information Exposure Through an Error Message\Path 14:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=50
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method stream, at line 500 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to debug, in method stream of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py, line 502.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py
Line	500	502
Object	e	debug

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py
Method def stream(self, user_question: str) -> Generator[Dict[str, Any], None, None]:

```
....
500.  except Exception as e:
....
502.  logger.debug(f"Error capturing tool calls: {e}", exc_info=True)
```

Information Exposure Through an Error Message\Path 15:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=51
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method stream, at line 614 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py, handles an Exception or runtime Error true. During the exception handling code, the application exposes the exception details to error, in method stream of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py, line 614.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py
Line	614	614
Object	true	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py
Method def stream(self, user_question: str) -> Generator[Dict[str, Any], None, None]:

```
....
614.  logger.error(f"Error in streaming: {e}", exc_info=True)
```

Information Exposure Through an Error Message\Path 16:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=52
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method stream, at line 590 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method stream of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py, line 614.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py
Line	590	614
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py
Method def stream(self, user_question: str) -> Generator[Dict[str, Any], None, None]:

```
....
590.  except Exception as e:
....
614.  logger.error(f"Error in streaming: {e}", exc_info=True)
```

Information Exposure Through an Error Message\Path 17:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=53
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method _connect, at line 35 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/neo4j_connector.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method _connect of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/neo4j_connector.py, line 36.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/neo4j_connector.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/neo4j_connector.py
Line	35	36
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/neo4j_connector.py
Method def _connect(self):

```
....
35.  except Exception as e:
36.  logger.error(f"Failed to connect to Neo4j: {e}")
```

Information Exposure Through an Error Message\Path 18:

Severity Low
Result State To Verify
Online Results https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=54
Status New
Detection Date 11/2/2026 2:53:25 PM

Method signup, at line 49 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/auth/auth_routes.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method signup of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/auth/auth_routes.py, line 50.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/auth/auth_routes.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/auth/auth_routes.py
Line	49	50
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/auth/auth_routes.py
Method async def signup(payload: SignupDto):

```
....
49.  except Exception as e:
50.  logger.error(f"Signup error: {e}", exc_info=True)
```

Information Exposure Through an Error Message\Path 19:

Severity Low
Result State To Verify

Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=55
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method format_chat_response, at line 50 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/response_formatter.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method format_chat_response of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/response_formatter.py, line 51.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/response_formatter.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/response_formatter.py
Line	50	51
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/response_formatter.py
Method def format_chat_response(

```
....
50.  except Exception as e:
51.  logger.error(f"Error formatting chat response: {e}")
```

Information Exposure Through an Error Message\Path 20:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=56
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method lifespan, at line 51 of mahindragto-nashik-chatbot-pq-5464a1e870d5/main.py, handles an Exception or runtime Error _idx_err. During the exception handling code, the application exposes the exception details to warning, in method lifespan of mahindragto-nashik-chatbot-pq-5464a1e870d5/main.py, line 52.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/main.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/main.py
Line	51	52
Object	_idx_err	warning

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/main.py
Method async def lifespan(app: FastAPI):

```
....
51.  except Exception as _idx_err:
52.  logger.warning(f"Index migrations non-critical failure:
{_idx_err}")
```

Information Exposure Through an Error Message\Path 21:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=57
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method _connect, at line 53 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method _connect of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py, line 54.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py
Line	53	54
Object	e	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py

Method def _connect(self):

```
....
53.  except Exception as e:
54.  logger.error(f"Failed to connect to PostgreSQL: {e}")
```

Information Exposure Through an Error Message\Path 22:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=58
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method lifespan, at line 54 of mahindragto-nashik-chatbot-pq-5464a1e870d5/main.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method lifespan of mahindragto-nashik-chatbot-pq-5464a1e870d5/main.py, line 55.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-	mahindragto-nashik-chatbot-pq-

	5464a1e870d5/main.py	5464a1e870d5/main.py
Line	54	55
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/main.py
Method async def lifespan(app: FastAPI):

```
....
54.  except Exception as e:
55.  logger.error(f"□ Critical error during startup: {e}")
```

Information Exposure Through an Error Message\Path 23:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=59
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method start_new_chat, at line 57 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/conversations/conversation_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method start_new_chat of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/conversations/conversation_service.py, line 58.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/conversations/conversation_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/conversations/conversation_service.py
Line	57	58
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/conversations/conversation_service.py
Method def start_new_chat(self, payload, agent_type: str = "analyst") -> int:

```
....
57.  except Exception as e:
58.  logger.error(f"Error starting new chat: {e}")
```

Information Exposure Through an Error Message\Path 24:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=60
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_chat_model, at line 58 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/models/azure_openai_handler.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_chat_model of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/models/azure_openai_handler.py, line 59.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/models/azure_openai_handler.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/models/azure_openai_handler.py
Line	58	59
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/models/azure_openai_handler.py
Method def get_chat_model(

```
....
58.  except Exception as e:
59.  logger.error(f"Error initializing chat model: {e}")
```

Information Exposure Through an Error Message\Path 25:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=61
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method _load_default_prompts_from_files, at line 59 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/prompt_manager.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to warning, in method _load_default_prompts_from_files of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/prompt_manager.py, line 60.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/prompt_manager.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/prompt_manager.py
Line	59	60
Object	e	warning

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/prompt_manager.py
Method def _load_default_prompts_from_files():

```
....
59.  except ImportError as e:
60.  logger.warning(f"Could not load default prompts from files: {e}")
```

Information Exposure Through an Error Message\Path 26:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=62
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method create_conversation, at line 59 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/chat_history/chat_manager.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method create_conversation of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/chat_history/chat_manager.py, line 60.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/chat_history/chat_manager.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/chat_history/chat_manager.py
Line	59	60
Object	e	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/chat_history/chat_manager.py

Method def create_conversation(

```
....
59.  except Exception as e:
60.  logger.error(f"Error creating conversation: {e}")
```

Information Exposure Through an Error Message\Path 27:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=63
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method search_standards, at line 61 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/tools/vector_db_tool.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method search_standards of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/tools/vector_db_tool.py, line 62.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-	mahindragto-nashik-chatbot-pq-

	5464a1e870d5/app/tools/vector_db_tool.py	5464a1e870d5/app/tools/vector_db_tool.py
Line	61	62
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/tools/vector_db_tool.py
Method def search_standards(query: str, top_k: int = 5) -> str:

```
....
61.  except Exception as e:
62.  logger.error(f"search_standards error: {e}", exc_info=True)
```

Information Exposure Through an Error Message\Path 28:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=64
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method execute_query, at line 64 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/neo4j_connector.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method execute_query of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/neo4j_connector.py, line 65.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/neo4j_connector.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/neo4j_connector.py
Line	64	65
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/neo4j_connector.py
Method def execute_query(

```
....
64.  except Exception as e:
65.  logger.error(f"Error executing Cypher query: {e}")
```

Information Exposure Through an Error Message\Path 29:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=65
Status	New

Detection Date	11/2/2026 2:53:25 PM

Method initialize_database, at line 66 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_manager.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method initialize_database of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_manager.py, line 67.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_manager.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_manager.py
Line	66	67
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_manager.py
Method def initialize_database(self):

```
....
66.  except ValueError as e:
67.  logger.error(f"Invalid database name: {e}")
```

Information Exposure Through an Error Message\Path 30:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=66
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method warranty_lookup, at line 69 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method warranty_lookup of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py, line 70.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py
Line	69	70
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py
Method async def warranty_lookup(

```
....
69.  except Exception as e:
70.  logger.error(f"Data lookup error: {e}")
```

Information Exposure Through an Error Message\Path 31:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=67
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method initialize_database, at line 69 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_manager.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method initialize_database of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_manager.py, line 70.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_manager.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_manager.py
Line	69	70
Object	e	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_manager.py

Method def initialize_database(self):

```
....
69.  except Exception as e:
70.  logger.error(f"Error initializing database: {e}")
```

Information Exposure Through an Error Message\Path 32:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=68
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method _initialize_agent, at line 69 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/cypher_agent.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method _initialize_agent of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/cypher_agent.py, line 70.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-	mahindragto-nashik-chatbot-pq-

	5464a1e870d5/app/agents/cypher_agent.py	5464a1e870d5/app/agents/cypher_agent.py
Line	69	70
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/cypher_agent.py
Method def _initialize_agent(self):

```
....
69.  except Exception as e:
70.  logger.error(f"Error initializing Cypher agent: {e}")
```

Information Exposure Through an Error Message\Path 33:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=69
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_session, at line 69 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_session of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py, line 71.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py
Line	69	71
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py
Method def get_session(self) -> Session:

```
....
69.  except Exception as e:
....
71.  logger.error(f"Session error: {e}")
```

Information Exposure Through an Error Message\Path 34:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=70

Status	New
Detection Date	11/2/2026 2:53:25 PM

Method lifespan, at line 70 of mahindragto-nashik-chatbot-pq-5464a1e870d5/main.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to warning, in method lifespan of mahindragto-nashik-chatbot-pq-5464a1e870d5/main.py, line 71.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/main.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/main.py
Line	70	71
Object	e	warning

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/main.py
Method async def lifespan(app: FastAPI):

```
....
70.  except Exception as e:
71.  logger.warning(f"□□  Error closing Neo4j connection: {e}")
```

Information Exposure Through an Error Message\Path 35:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=71
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method login, at line 71 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/auth/auth_routes.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method login of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/auth/auth_routes.py, line 72.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/auth/auth_routes.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/auth/auth_routes.py
Line	71	72
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/auth/auth_routes.py
Method async def login(payload: LoginDto):

```
....
71.  except Exception as e:
72.  logger.error(f"Login error: {e}", exc_info=True)
```

Information Exposure Through an Error Message\Path 36:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=72
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method initiate_conversation, at line 73 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/conversations/conversation_routes.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method initiate_conversation of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/conversations/conversation_routes.py, line 74.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/conversations/conversation_routes.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/conversations/conversation_routes.py
Line	73	74
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/conversations/conversation_routes.py
Method async def initiate_conversation(payload: InitiateConversationDto):

```
....
73.  except Exception as e:
74.  logger.error(f"Error initiating conversation: {e}", exc_info=True)
```

Information Exposure Through an Error Message\Path 37:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=73
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_part_labeler_schema, at line 76 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/tools/pg_schema_tool.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to warning, in method get_part_labeler_schema of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/tools/pg_schema_tool.py, line 77.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-	mahindragto-nashik-chatbot-pq-

	5464a1e870d5/app/tools/pg_schema_tool.py	5464a1e870d5/app/tools/pg_schema_tool.py
Line	76	77
Object	e	warning

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/tools/pg_schema_tool.py
Method def get_part_labeler_schema() -> str:

```
....
76.  except Exception as e:
77.  logger.warning(f"Could not fetch schema for {table_name}: {e}")
```

Information Exposure Through an Error Message\Path 38:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=74
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_schema, at line 79 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/neo4j_connector.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_schema of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/neo4j_connector.py, line 80.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/neo4j_connector.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/neo4j_connector.py
Line	79	80
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/neo4j_connector.py
Method def get_schema(self) -> Dict[str, Any]:

```
....
79.  except Exception as e:
80.  logger.error(f"Error retrieving schema: {e}")
```

Information Exposure Through an Error Message\Path 39:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=75
Status	New

Detection Date	11/2/2026 2:53:25 PM

Method format_query_result, at line 79 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/response_formatter.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method format_query_result of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/response_formatter.py, line 80.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/response_formatter.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/response_formatter.py
Line	79	80
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/response_formatter.py
Method def format_query_result(

```
....
79.  except Exception as e:
80.  logger.error(f"Error formatting query result: {e}")
```

Information Exposure Through an Error Message\Path 40:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=76
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method _initialize_database, at line 81 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/startup_initializer.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method _initialize_database of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/startup_initializer.py, line 82.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/startup_initializer.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/startup_initializer.py
Line	81	82
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/startup_initializer.py
Method def _initialize_database(self) -> Dict[str, Any]:

```
....
81.  except Exception as e:
82.  logger.error(f"  □ Database init failed: {e}")
```

Information Exposure Through an Error Message\Path 41:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=77
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method detailed_health_check, at line 83 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/health/health_routes.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method detailed_health_check of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/health/health_routes.py, line 84.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/health/health_routes.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/health/health_routes.py
Line	83	84
Object	e	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/health/health_routes.py

Method async def detailed_health_check():

```
....
83.  except Exception as e:
84.  logger.error(f"Error in detailed health check: {e}")
```

Information Exposure Through an Error Message\Path 42:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=78
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_part_labeler_schema, at line 83 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/tools/pg_schema_tool.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_part_labeler_schema of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/tools/pg_schema_tool.py, line 84.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-	mahindragto-nashik-chatbot-pq-

	5464a1e870d5/app/tools/pg_schema_tool.py	5464a1e870d5/app/tools/pg_schema_tool.py
Line	83	84
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/tools/pg_schema_tool.py
Method def get_part_labeler_schema() -> str:

```
....
83.  except Exception as e:
84.  logger.error(f"Error in get_part_labeler_schema: {e}")
```

Information Exposure Through an Error Message\Path 43:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=79
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method upload_warranty_file, at line 86 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method upload_warranty_file of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py, line 87.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py
Line	86	87
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py
Method async def upload_warranty_file(file: UploadFile = File(...)):

```
....
86.  except Exception as e:
87.  logger.error(f"Warranty upload error: {e}")
```

Information Exposure Through an Error Message\Path 44:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=80
Status	New

Detection Date	11/2/2026 2:53:25 PM

Method get_checkpointer, at line 87 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/checkpointer_manager.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_checkpointer of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/checkpointer_manager.py, line 88.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/checkpointer_manager.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/checkpointer_manager.py
Line	87	88
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/checkpointer_manager.py
Method def get_checkpointer(self):

```
....
87.  except Exception as e:
88.  logger.error(f"□ Failed to initialize PostgreSQL checkpointer: {e}")
```

Information Exposure Through an Error Message\Path 45:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=81
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method test_connection, at line 93 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/neo4j_connector.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method test_connection of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/neo4j_connector.py, line 94.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/neo4j_connector.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/neo4j_connector.py
Line	93	94
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/neo4j_connector.py
Method def test_connection(self) -> bool:

```
....
93.  except Exception as e:
94.  logger.error(f"Connection test failed: {e}")
```

Information Exposure Through an Error Message\Path 46:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=82
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method save_message, at line 95 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/chat_history/chat_manager.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method save_message of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/chat_history/chat_manager.py, line 96.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/chat_history/chat_manager.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/chat_history/chat_manager.py
Line	95	96
Object	e	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/chat_history/chat_manager.py

Method def save_message(

```
....
95.  except Exception as e:
96.  logger.error(f"Error saving message: {e}")
```

Information Exposure Through an Error Message\Path 47:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=83
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method confirm_warranty_mapping, at line 99 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method confirm_warranty_mapping of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py, line 100.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-	mahindragto-nashik-chatbot-pq-

	5464a1e870d5/backend/api/routes/part_labeler_routes.py	5464a1e870d5/backend/api/routes/part_labeler_routes.py
Line	99	100
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py
Method async def confirm_warranty_mapping(payload: MappingRequest):

```
....
99.  except Exception as e:
100.  logger.error(f"Mapping confirmation error: {e}")
```

Information Exposure Through an Error Message\Path 48:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=84
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method execute_query, at line 99 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method execute_query of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py, line 100.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py
Line	99	100
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py
Method def execute_query(self, query: str, params: Dict[str, Any] = None) -> List[Any]:

```
....
99.  except Exception as e:
100.  logger.error(f"Error executing query: {e}")
```

Information Exposure Through an Error Message\Path 49:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=85

Status	New
Detection Date	11/2/2026 2:53:25 PM

Method _get_engine, at line 99 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/prompt_manager.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method _get_engine of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/prompt_manager.py, line 100.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/prompt_manager.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/prompt_manager.py
Line	99	100
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/prompt_manager.py
Method def _get_engine(self):

```
....
99.  except Exception as e:
100.  logger.error(f"Error creating database engine: {e}")
```

Information Exposure Through an Error Message\Path 50:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=86
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method close, at line 103 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/checkpointer_manager.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method close of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/checkpointer_manager.py, line 104.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/checkpointer_manager.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/checkpointer_manager.py
Line	103	104
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/checkpointer_manager.py
Method def close(self):

```
....
103.  except Exception as e:
104.  logger.error(f"Error closing checkpointer: {e}")
```

Information Exposure Through an Error Message\Path 51:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=87
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_reasoning_model, at line 104 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/models/azure_openai_handler.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_reasoning_model of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/models/azure_openai_handler.py, line 105.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/models/azure_openai_handler.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/models/azure_openai_handler.py
Line	104	105
Object	e	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/models/azure_openai_handler.py

Method def get_reasoning_model(

```
....
104.  except Exception as e:
105.  logger.error(f"Error initializing reasoning model: {e}")
```

Information Exposure Through an Error Message\Path 52:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=88
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_filter_options, at line 107 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_filter_options of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py, line 108.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-	mahindragto-nashik-chatbot-pq-

	5464a1e870d5/backend/api/routes/part_labeler_routes.py	5464a1e870d5/backend/api/routes/part_labeler_routes.py
Line	107	108
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py
Method async def get_filter_options(userId: int = Query(...), dataSource: Optional[str] = Query("warranty")):

```
....
107.  except Exception as e:
108.  logger.error(f"Filter options error: {e}")
```

Information Exposure Through an Error Message\Path 53:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=89
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method create_tables_if_not_exists, at line 107 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_manager.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method create_tables_if_not_exists of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_manager.py, line 108.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_manager.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_manager.py
Line	107	108
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_manager.py
Method def create_tables_if_not_exists(self):

```
....
107.  except Exception as e:
108.  logger.error(f"Error creating tables: {e}")
```

Information Exposure Through an Error Message\Path 54:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pa

	thid=90
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method generate_query, at line 108 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/cypher_agent.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method generate_query of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/cypher_agent.py, line 109.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/cypher_agent.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/cypher_agent.py
Line	108	109
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/cypher_agent.py
Method def generate_query(self, question: str) -> Dict[str, Any]:

```
....
108.  except Exception as e:
109.  logger.error(f"Error generating Cypher query: {e}")
```

Information Exposure Through an Error Message\Path 55:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=91
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method execute_cypher, at line 110 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/query_executor.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method execute_cypher of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/query_executor.py, line 111.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/query_executor.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/query_executor.py
Line	110	111
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/query_executor.py
Method def execute_cypher(

```
....
110.  except Exception as e:
111.  logger.error(f"Error executing Cypher query: {e}")
```

Information Exposure Through an Error Message\Path 56:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=92
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method submit_feedback, at line 111 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/conversations/conversation_routes.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method submit_feedback of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/conversations/conversation_routes.py, line 112.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/conversations/conversation_routes.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/conversations/conversation_routes.py
Line	111	112
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/conversations/conversation_routes.py
Method async def submit_feedback(

```
....
111.  except Exception as e:
112.  logger.error(f"Error submitting feedback: {e}", exc_info=True)
```

Information Exposure Through an Error Message\Path 57:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=93
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method execute_cypher_query, at line 112 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to warning, in method execute_cypher_query of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py, line 113.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-	mahindragto-nashik-chatbot-pq-

	5464a1e870d5/app/agents/analyst_agent.py	5464a1e870d5/app/agents/analyst_agent.py
Line	112	113
Object	e	warning

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py
Method def execute_cypher_query(question: str) -> Dict[str, Any]:

```
....
112.  except Exception as e:
113.  logger.warning(f"Could not generate chart data: {e}")
```

Information Exposure Through an Error Message\Path 58:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=94
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_stats, at line 113 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/health/health_routes.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_stats of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/health/health_routes.py, line 114.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/health/health_routes.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/health/health_routes.py
Line	113	114
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/health/health_routes.py
Method async def get_stats():

```
....
113.  except Exception as e:
114.  logger.error(f"Error getting stats: {e}")
```

Information Exposure Through an Error Message\Path 59:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=95
Status	New

Detection Date	11/2/2026 2:53:25 PM

Method extract_excel_headers, at line 113 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method extract_excel_headers of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 114.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Line	113	114
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Method def extract_excel_headers(self, file_path: str) -> List[str]:

```
....
113.  except Exception as e:
114.  logger.error(f"Error extracting headers: {e}")
```

Information Exposure Through an Error Message\Path 60:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=96
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_node_count, at line 115 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/neo4j_connector.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_node_count of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/neo4j_connector.py, line 116.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/neo4j_connector.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/neo4j_connector.py
Line	115	116
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/neo4j_connector.py
Method def get_node_count(self, label: str = None) -> int:

```
....
115.  except Exception as e:
116.  logger.error(f"Error getting node count: {e}")
```

Information Exposure Through an Error Message\Path 61:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=97
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method _initialize_agent, at line 117 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_dashboard_agent.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method _initialize_agent of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_dashboard_agent.py, line 118.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_dashboard_agent.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_dashboard_agent.py
Line	117	118
Object	e	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_dashboard_agent.py

Method def _initialize_agent(self):

```
....
117.  except Exception as e:
118.  logger.error(f"Error initialising Part Labeler Dashboard agent:
{e}")
```

Information Exposure Through an Error Message\Path 62:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=98
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method _initialize_agent, at line 118 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/standards_guidelines_agent.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method _initialize_agent of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/standards_guidelines_agent.py, line 119.

	Source	Destination

File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/standards_guidelines_agent.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/standards_guidelines_agent.py
Line	118	119
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/standards_guidelines_agent.py
Method def _initialize_agent(self):

```
....
118.  except Exception as e:
119.  logger.error(f"Error initializing Standards & Guidelines agent: {e}")
```

Information Exposure Through an Error Message\Path 63:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=99
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method execute_query_with_headers, at line 120 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method execute_query_with_headers of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py, line 121.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py
Line	120	121
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py
Method def execute_query_with_headers(self, query: str, params: Dict[str, Any] = None) -> tuple:

```
....
120.  except Exception as e:
121.  logger.error(f"Error executing query with headers: {e}")
```

Information Exposure Through an Error Message\Path 64:

Severity	Low
Result State	To Verify

Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=100
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method _initialize_agent, at line 123 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method _initialize_agent of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py, line 124.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py
Line	123	124
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py
Method def _initialize_agent(self):

```
....
123.  except Exception as e:
124.  logger.error(f"Error initializing QLense agent: {e}")
```

Information Exposure Through an Error Message\Path 65:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=101
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method _initialize_agent, at line 124 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_chart_agent.py, handles an Exception or runtime Error exc. During the exception handling code, the application exposes the exception details to error, in method _initialize_agent of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_chart_agent.py, line 125.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_chart_agent.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_chart_agent.py
Line	124	125
Object	exc	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_chart_agent.py

Method	def _initialize_agent(self):

```
....
124.  except Exception as exc:
125.  logger.error(f"PartLabelerChartAgent init error: {exc}")
```

Information Exposure Through an Error Message\Path 66:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=102
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method close, at line 125 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/neo4j_connector.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method close of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/neo4j_connector.py, line 126.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/neo4j_connector.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/neo4j_connector.py
Line	125	126
Object	e	error

Code Snippet	
File Name	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/neo4j_connector.py
Method	def close(self):

```
....
125.  except Exception as e:
126.  logger.error(f"Error closing connection: {e}")
```

Information Exposure Through an Error Message\Path 67:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=103
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method generate_chart, at line 127 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/tools/chart_generator_tool.py, handles an Exception or runtime Error _fe. During the exception handling code, the application exposes the exception details to debug, in method generate_chart of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/tools/chart_generator_tool.py, line 128.

	Source	Destination

File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/tools/chart_generator_tool.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/tools/chart_generator_tool.py
Line	127	128
Object	_fe	debug

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/tools/chart_generator_tool.py
Method def generate_chart(query_results_json: str, user_question: str) -> str:

```
....
127.  except Exception as _fe:
128.  logger.debug(f"Rule-based chart fallback failed: {_fe}")
```

Information Exposure Through an Error Message\Path 68:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=104
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method execute_read_query, at line 129 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/tools/pg_query_tool.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method execute_read_query of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/tools/pg_query_tool.py, line 130.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/tools/pg_query_tool.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/tools/pg_query_tool.py
Line	129	130
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/tools/pg_query_tool.py
Method def execute_read_query(sql_query: str) -> str:

```
....
129.  except Exception as e:
130.  logger.error(f"Error executing read query: {e}", exc_info=True)
```

Information Exposure Through an Error Message\Path 69:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=105

Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_embedding_model, at line 130 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/models/azure_openai_handler.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_embedding_model of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/models/azure_openai_handler.py, line 131.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/models/azure_openai_handler.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/models/azure_openai_handler.py
Line	130	131
Object	e	error

Code Snippet	
File Name	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/models/azure_openai_handler.py
Method	def get_embedding_model(self):

```
....
130.  except Exception as e:
131.  logger.error(f"Error initializing embedding model: {e}")
```

Information Exposure Through an Error Message\Path 70:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=106
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method download_warranty, at line 131 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method download_warranty of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py, line 132.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py
Line	131	132
Object	e	error

Code Snippet	
File Name	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py
Method	async def download_warranty(

```
....
131.  except Exception as e:
132.  logger.error(f"Download error: {e}")
```

Information Exposure Through an Error Message\Path 71:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=107
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_conversation, at line 133 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/conversations/conversation_routes.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_conversation of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/conversations/conversation_routes.py, line 134.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/conversations/conversation_routes.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/conversations/conversation_routes.py
Line	133	134
Object	e	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/conversations/conversation_routes.py

Method async def get_conversation(

```
....
133.  except Exception as e:
134.  logger.error(f"Error retrieving conversation: {e}", exc_info=True)
```

Information Exposure Through an Error Message\Path 72:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=108
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_conversation_messages, at line 134 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/chat_history/chat_manager.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_conversation_messages of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/chat_history/chat_manager.py, line 135.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-	mahindragto-nashik-chatbot-pq-

	5464a1e870d5/app/chat_history/chat_manager.py	5464a1e870d5/app/chat_history/chat_manager.py
Line	134	135
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/chat_history/chat_manager.py
Method def get_conversation_messages(self, conversation_id: int) -> List[Dict]:

```
....
134.  except Exception as e:
135.  logger.error(f"Error retrieving messages: {e}")
```

Information Exposure Through an Error Message\Path 73:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=109
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_prompt, at line 135 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/prompt_manager.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to warning, in method get_prompt of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/prompt_manager.py, line 136.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/prompt_manager.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/prompt_manager.py
Line	135	136
Object	e	warning

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/prompt_manager.py
Method def get_prompt(self, prompt_key: str, use_cache: bool = True) -> Optional[str]:

```
....
135.  except SQLAlchemyError as e:
136.  logger.warning(f"Database error loading prompt '{prompt_key}': {e}")
```

Information Exposure Through an Error Message\Path 74:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pa

	thid=110
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_prompt, at line 137 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/prompt_manager.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to warning, in method get_prompt of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/prompt_manager.py, line 138.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/prompt_manager.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/prompt_manager.py
Line	137	138
Object	e	warning

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/prompt_manager.py

Method def get_prompt(self, prompt_key: str, use_cache: bool = True) -> Optional[str]:

```
....
137.  except Exception as e:
138.  logger.warning(f"Error loading prompt '{prompt_key}': {e}")
```

Information Exposure Through an Error Message\Path 75:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=111
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method test_connection, at line 139 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/opensearch_connector.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method test_connection of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/opensearch_connector.py, line 140.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/opensearch_connector.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/opensearch_connector.py
Line	139	140
Object	e	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/opensearch_connector.py

Method def test_connection(self) -> bool:

```
....
139.  except Exception as e:
140.  logger.error(f"OpenSearch connection test failed: {e}")
```

Information Exposure Through an Error Message\Path 76:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=112
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_initialization_status, at line 144 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/health/health_routes.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_initialization_status of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/health/health_routes.py, line 145.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/health/health_routes.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/health/health_routes.py
Line	144	145
Object	e	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/health/health_routes.py

Method async def get_initialization_status(request: Request):

```
....
144.  except Exception as e:
145.  logger.error(f"Error getting initialization status: {e}")
```

Information Exposure Through an Error Message\Path 77:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=113
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method _setup_tables_and_prompts, at line 149 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/startup_initializer.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method _setup_tables_and_prompts of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/startup_initializer.py, line 150.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-	mahindragto-nashik-chatbot-pq-

	5464a1e870d5/app/services/startup_initializer.py	5464a1e870d5/app/services/startup_initializer.py
Line	149	150
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/startup_initializer.py
Method def _setup_tables_and_prompts(self) -> tuple:

```
....
149.  except Exception as e:
150.  logger.error(f"  Tables/prompts setup failed: {e}")
```

Information Exposure Through an Error Message\Path 78:

Severity Low
Result State To Verify
Online Results https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=114
Status New
Detection Date 11/2/2026 2:53:25 PM

Method execute_insert, at line 150 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method execute_insert of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py, line 151.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py
Line	150	151
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py
Method def execute_insert(self, query: str, params: Dict[str, Any] = None) -> Any:

```
....
150.  except Exception as e:
151.  logger.error(f"Error executing insert: {e}")
```

Information Exposure Through an Error Message\Path 79:

Severity Low
Result State To Verify
Online Results https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=115

Status	New
Detection Date	11/2/2026 2:53:25 PM

Method generate_chart, at line 151 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/tools/chart_generator_tool.py, handles an Exception or runtime Error exc. During the exception handling code, the application exposes the exception details to error, in method generate_chart of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/tools/chart_generator_tool.py, line 152.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/tools/chart_generator_tool.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/tools/chart_generator_tool.py
Line	151	152
Object	exc	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/tools/chart_generator_tool.py
Method def generate_chart(query_results_json: str, user_question: str) -> str:

```
....
151.  except Exception as exc:
152.  logger.error(f"generate_chart tool error: {exc}", exc_info=True)
```

Information Exposure Through an Error Message\Path 80:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=116
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method execute_with_timeout, at line 154 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/query_executor.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method execute_with_timeout of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/query_executor.py, line 155.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/query_executor.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/query_executor.py
Line	154	155
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/query_executor.py
Method def execute_with_timeout(

```
....
154.  except TimeoutError as e:
155.  logger.error(f"Query timeout: {e}")
```

Information Exposure Through an Error Message\Path 81:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=117
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_conversation_history, at line 157 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/conversations/conversation_routes.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_conversation_history of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/conversations/conversation_routes.py, line 158.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/conversations/conversation_routes.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/conversations/conversation_routes.py
Line	157	158
Object	e	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/conversations/conversation_routes.py

Method async def get_conversation_history(

```
....
157.  except Exception as e:
158.  logger.error(f"Error retrieving conversation history: {e}",
exc_info=True)
```

Information Exposure Through an Error Message\Path 82:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=118
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method upload_image, at line 159 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method upload_image of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py, line 160.

	Source	Destination

File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py
Line	159	160
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py
Method async def upload_image(

```
....
159.  except Exception as e:
160.  logger.error(f"Upload error: {e}", exc_info=True)
```

Information Exposure Through an Error Message\Path 83:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=119
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method search_quality_issues, at line 160 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/tools/qlense_search_tool.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method search_quality_issues of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/tools/qlense_search_tool.py, line 161.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/tools/qlense_search_tool.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/tools/qlense_search_tool.py
Line	160	161
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/tools/qlense_search_tool.py
Method def search_quality_issues(part_search_term: str) -> str:

```
....
160.  except Exception as e:
161.  logger.error(f"search_quality_issues: error querying
{cfg['table']}: {e}")
```

Information Exposure Through an Error Message\Path 84:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pa

	thid=120
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method scrape_directory, at line 162 of mahindragto-nashik-chatbot-pq-5464a1e870d5/dataloader/scraper/file_system_scraper.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method scrape_directory of mahindragto-nashik-chatbot-pq-5464a1e870d5/dataloader/scraper/file_system_scraper.py, line 163.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/dataloader/scraper/file_system_scraper.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/dataloader/scraper/file_system_scraper.py
Line	162	163
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/dataloader/scraper/file_system_scraper.py
Method def scrape_directory(

```
....
162.  except Exception as e:
163.  logger.error(f"Error processing file {file_path}: {e}")
```

Information Exposure Through an Error Message\Path 85:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=121
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method execute_with_timeout, at line 163 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/query_executor.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method execute_with_timeout of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/query_executor.py, line 166.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/query_executor.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/query_executor.py
Line	163	166
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/query_executor.py
Method def execute_with_timeout(

```
....
163.  except Exception as e:
....
166.  logger.error(f"Error in query execution: {e}")
```

Information Exposure Through an Error Message\Path 86:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=122
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method delete_image, at line 168 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method delete_image of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py, line 169.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py
Line	168	169
Object	e	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py

Method async def delete_image(image_id: int, userId: int = Query(...)):

```
....
168.  except Exception as e:
169.  logger.error(f"Delete image error: {e}")
```

Information Exposure Through an Error Message\Path 87:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=123
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_all_prompts, at line 168 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/prompt_manager.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_all_prompts of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/prompt_manager.py, line 169.

	Source	Destination

File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/prompt_manager.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/prompt_manager.py
Line	168	169
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/prompt_manager.py
Method def get_all_prompts(self) -> Dict[str, Any]:

```
....
168.  except Exception as e:
169.  logger.error(f"Error loading all prompts: {e}")
```

Information Exposure Through an Error Message\Path 88:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=124
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method execute_update, at line 170 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method execute_update of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py, line 171.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py
Line	170	171
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py
Method def execute_update(self, query: str, params: Dict[str, Any] = None) -> int:

```
....
170.  except Exception as e:
171.  logger.error(f"Error executing update: {e}")
```

Information Exposure Through an Error Message\Path 89:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pa

	thid=125
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_complete_chat, at line 171 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/chat_history/chat_manager.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_complete_chat of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/chat_history/chat_manager.py, line 172.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/chat_history/chat_manager.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/chat_history/chat_manager.py
Line	171	172
Object	e	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/chat_history/chat_manager.py

Method def get_complete_chat(self, conversation_id: int) -> Dict:

```
....
171.  except Exception as e:
172.  logger.error(f"Error retrieving complete chat: {e}")
```

Information Exposure Through an Error Message\Path 90:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=126
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_images, at line 176 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_images of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py, line 177.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py
Line	176	177
Object	e	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py

Method async def get_images(userId: int = Query(...)):

```
....
176.  except Exception as e:
177.  logger.error(f"Get images error: {e}")
```

Information Exposure Through an Error Message\Path 91:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=127
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method delete_doc, at line 178 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/z_satge/docs.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to warning, in method delete_doc of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/z_satge/docs.py, line 179.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/z_satge/docs.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/z_satge/docs.py
Line	178	179
Object	e	warning

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/z_satge/docs.py

Method def delete_doc(

```
....
178.  except Exception as e:
179.  logger.warning(f"Could not delete file {file_path}: {e}")
```

Information Exposure Through an Error Message\Path 92:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=128
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method list_prompts, at line 181 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/health/health_routes.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method list_prompts of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/health/health_routes.py, line 182.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-	mahindragto-nashik-chatbot-pq-

	5464a1e870d5/backend/api/routes/health/health_routes.py	5464a1e870d5/backend/api/routes/health/health_routes.py
Line	181	182
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/health/health_routes.py
Method async def list_prompts():

```
....
181.  except Exception as e:
182.  logger.error(f"Error listing prompts: {e}")
```

Information Exposure Through an Error Message\Path 93:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=129
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method process_mapped_warranty_data, at line 182 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method process_mapped_warranty_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 183.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Line	182	183
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Method def process_mapped_warranty_data(self, file_path: str, mapping: Dict[str, str], user_id: int) -> int:

```
....
182.  except Exception as e:
183.  logger.error(f"Error processing mapped data: {e}")
```

Information Exposure Through an Error Message\Path 94:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pa

	thid=130
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method test_connection, at line 184 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method test_connection of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py, line 185.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py
Line	184	185
Object	e	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py

Method def test_connection(self) -> bool:

```
....
184.  except Exception as e:
185.  logger.error(f"Connection test failed: {e}")
```

Information Exposure Through an Error Message\Path 95:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=131
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method save_label, at line 185 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method save_label of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py, line 186.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py
Line	185	186
Object	e	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py

Method async def save_label(label: LabelDto):

```
....
185.  except Exception as e:
186.  logger.error(f"Save label error: {e}")
```

Information Exposure Through an Error Message\Path 96:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=132
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method format_batch_list, at line 192 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/response_formatter.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method format_batch_list of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/response_formatter.py, line 193.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/response_formatter.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/response_formatter.py
Line	192	193
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/response_formatter.py
Method def format_batch_list(batches: List[Dict]) -> List[Dict]:

```
....
192.  except Exception as e:
193.  logger.error(f"Error formatting batch list: {e}")
```

Information Exposure Through an Error Message\Path 97:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=133
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method _validate_connections, at line 192 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/startup_initializer.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to warning, in method _validate_connections of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/startup_initializer.py, line 193.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/startup_initi	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/startup_initi

	alizer.py	alizer.py
Line	192	193
Object	e	warning

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/startup_initializer.py
Method def _validate_connections(self) -> Dict[str, Any]:

```
....
192.  except Exception as e:
193.  logger.warning(f"  □□  Neo4j validation failed: {e}")
```

Information Exposure Through an Error Message\Path 98:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=134
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method delete_label, at line 194 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method delete_label of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py, line 195.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py
Line	194	195
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py
Method async def delete_label(label_id: int, userId: int = Query(...)):

```
....
194.  except Exception as e:
195.  logger.error(f"Delete label error: {e}")
```

Information Exposure Through an Error Message\Path 99:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=135
Status	New

Detection Date	11/2/2026 2:53:25 PM

Method close, at line 194 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method close of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py, line 195.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py
Line	194	195
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py
Method def close(self):

```
....
194.  except Exception as e:
195.  logger.error(f"Error closing connection: {e}")
```

Information Exposure Through an Error Message\Path 100:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=136
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method validate_query, at line 197 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/query_executor.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method validate_query of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/query_executor.py, line 198.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/query_executor.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/query_executor.py
Line	197	198
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/query_executor.py
Method def validate_query(self, cypher_query: str) -> bool:

```
....
197.  except Exception as e:
198.  logger.error(f"Error validating query: {e}")
```

Information Exposure Through an Error Message\Path 101:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=137
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method update_label, at line 203 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method update_label of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py, line 204.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py
Line	203	204
Object	e	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py

Method async def update_label(label_id: int, payload: UpdateLabelDto):

```
....
203.  except Exception as e:
204.  logger.error(f"Update label error: {e}")
```

Information Exposure Through an Error Message\Path 102:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=138
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method run_migrations, at line 204 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_manager.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method run_migrations of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_manager.py, line 205.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-	mahindragto-nashik-chatbot-pq-

	5464a1e870d5/app/connectors/state_db_manager.py	5464a1e870d5/app/connectors/state_db_manager.py
Line	204	205
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_manager.py
Method def run_migrations(self):

```
....
204.  except Exception as e:
205.  logger.error(f"Error running migrations: {e}")
```

Information Exposure Through an Error Message\Path 103:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=139
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method _initialize_agent, at line 209 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to debug, in method _initialize_agent of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py, line 210.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py
Line	209	210
Object	e	debug

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py
Method def _initialize_agent(self):

```
....
209.  except Exception as e:
210.  logger.debug(f"Could not inspect agent graph: {e}")
```

Information Exposure Through an Error Message\Path 104:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=140
Status	New

Detection Date	11/2/2026 2:53:25 PM

Method list_user_chats, at line 210 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/chat_history/chat_manager.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method list_user_chats of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/chat_history/chat_manager.py, line 211.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/chat_history/chat_manager.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/chat_history/chat_manager.py
Line	210	211
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/chat_history/chat_manager.py
Method def list_user_chats(self, user_id: int, agent_type: str = None) -> List[Dict]:

```
....
210.  except Exception as e:
211.  logger.error(f"Error listing chats: {e}")
```

Information Exposure Through an Error Message\Path 105:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=141
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method generate, at line 211 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_chart_agent.py, handles an Exception or runtime Error exc. During the exception handling code, the application exposes the exception details to error, in method generate of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_chart_agent.py, line 212.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_chart_agent.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_chart_agent.py
Line	211	212
Object	exc	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_chart_agent.py
Method def generate(

```
....
211.  except Exception as exc:
212.  logger.error(f"PartLabelerChartAgent.generate error: {exc}",
exc_info=True)
```

Information Exposure Through an Error Message\Path 106:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=142
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method update_label_note, at line 212 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method update_label_note of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py, line 213.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py
Line	212	213
Object	e	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py

Method async def update_label_note(label_id: int, payload: UpdateLabelNoteDto):

```
....
212.  except Exception as e:
213.  logger.error(f"Update label note error: {e}")
```

Information Exposure Through an Error Message\Path 107:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=143
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method process_streaming, at line 214 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/conversations/conversation_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method process_streaming of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/conversations/conversation_service.py, line 215.

	Source	Destination

File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/conversations/conversation_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/conversations/conversation_service.py
Line	214	215
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/conversations/conversation_service.py
Method def process_streaming(

```
....
214.  except Exception as e:
215.  logger.error(f"Error in process_streaming: {e}", exc_info=True)
```

Information Exposure Through an Error Message\Path 108:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=144
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method _initialize_agent, at line 214 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method _initialize_agent of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py, line 215.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py
Line	214	215
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py
Method def _initialize_agent(self):

```
....
214.  except Exception as e:
215.  logger.error(f"Error initializing Analyst agent: {e}")
```

Information Exposure Through an Error Message\Path 109:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=145

Status	New
Detection Date	11/2/2026 2:53:25 PM

Method _flush_batch, at line 215 of mahindragto-nashik-chatbot-pq-5464a1e870d5/dataloader/embedding/embedding_creator.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method _flush_batch of mahindragto-nashik-chatbot-pq-5464a1e870d5/dataloader/embedding/embedding_creator.py, line 216.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/dataloader/embedding/embedding_creator.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/dataloader/embedding/embedding_creator.py
Line	215	216
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/dataloader/embedding/embedding_creator.py
Method def _flush_batch(

```
....
215.  except Exception as e:
216.  logger.error(f"Error updating Postgres for chunk
{chunk_info['index']}: {e}")
```

Information Exposure Through an Error Message\Path 110:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=146
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method drop_all_tables, at line 218 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_manager.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method drop_all_tables of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_manager.py, line 219.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_manager.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_manager.py
Line	218	219
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_manager.py
Method def drop_all_tables(self):

```
....
218.  except Exception as e:
219.  logger.error(f"Error dropping tables: {e}")
```

Information Exposure Through an Error Message\Path 111:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=147
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method _validate_connections, at line 218 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/startup_initializer.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to warning, in method _validate_connections of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/startup_initializer.py, line 219.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/startup_initializer.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/startup_initializer.py
Line	218	219
Object	e	warning

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/startup_initializer.py

Method def _validate_connections(self) -> Dict[str, Any]:

```
....
218.  except Exception as e:
219.  logger.warning(f"  □□  OpenSearch validation failed: {e}")
```

Information Exposure Through an Error Message\Path 112:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=148
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_labels, at line 220 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_labels of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py, line 221.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-	mahindragto-nashik-chatbot-pq-

	5464a1e870d5/backend/api/routes/part_labeler_routes.py	5464a1e870d5/backend/api/routes/part_labeler_routes.py
Line	220	221
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py
Method async def get_labels(image_id: int, userId: int = Query(...)):

```
....
220.  except Exception as e:
221.  logger.error(f"Get labels error: {e}")
```

Information Exposure Through an Error Message\Path 113:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=149
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method _flush_batch, at line 220 of mahindragto-nashik-chatbot-pq-5464a1e870d5/dataloader/embedding/embedding_creator.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method _flush_batch of mahindragto-nashik-chatbot-pq-5464a1e870d5/dataloader/embedding/embedding_creator.py, line 221.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/dataloader/embedding/embedding_creator.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/dataloader/embedding/embedding_creator.py
Line	220	221
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/dataloader/embedding/embedding_creator.py
Method def _flush_batch(

```
....
220.  except Exception as e:
221.  logger.error(f"Error during OpenSearch batch processing: {e}")
```

Information Exposure Through an Error Message\Path 114:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=150

Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_prompt, at line 221 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/health/health_routes.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_prompt of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/health/health_routes.py, line 222.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/health/health_routes.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/health/health_routes.py
Line	221	222
Object	e	error

Code Snippet	
File Name	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/health/health_routes.py
Method	async def get_prompt(prompt_key: str):

```
....
221.  except Exception as e:
222.  logger.error(f"Error getting prompt {prompt_key}: {e}")
```

Information Exposure Through an Error Message\Path 115:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=151
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method run_column_migrations, at line 222 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/migrations.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to warning, in method run_column_migrations of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/migrations.py, line 223.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/migrations.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/migrations.py
Line	222	223
Object	e	warning

Code Snippet	
File Name	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/migrations.py
Method	def run_column_migrations(session_factory) -> None:

```
....
222.  except Exception as e:
223.  logger.warning(f"Column migration skipped [{sql[:60]}]: {e}")
```

Information Exposure Through an Error Message\Path 116:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=152
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_data_status, at line 229 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_data_status of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py, line 230.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py
Line	229	230
Object	e	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py

Method async def get_data_status(userId: int = Query(...)):

```
....
229.  except Exception as e:
230.  logger.error(f"Data status error: {e}")
```

Information Exposure Through an Error Message\Path 117:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=153
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_warranty_data, at line 229 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_warranty_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 230.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-	mahindragto-nashik-chatbot-pq-

	5464a1e870d5/backend/services/part_labeler_service.py	5464a1e870d5/backend/services/part_labeler_service.py
Line	229	230
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Method def get_warranty_data(self, user_id: int, part_name: Optional[str] = None, month: Optional[list[str]] = None, base_model: Optional[list[str]] = None, mis_bucket: Optional[list[str]] = None, mfg_qtr: Optional[list[str]] = None) -> Any:

```
....
229.  except Exception as e:
230.  logger.error(f"Error fetching warranty data from DB: {e}")
```

Information Exposure Through an Error Message\Path 118:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=154
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_complete_chat, at line 232 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/conversations/conversation_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_complete_chat of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/conversations/conversation_service.py, line 233.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/conversations/conversation_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/conversations/conversation_service.py
Line	232	233
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/conversations/conversation_service.py
Method def get_complete_chat(self, conversation_id: int) -> Dict:

```
....
232.  except Exception as e:
233.  logger.error(f"Error retrieving complete chat: {e}",
exc_info=True)
```

Information Exposure Through an Error Message\Path 119:

Severity	Low

Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=155
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method update_chat_title, at line 233 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/chat_history/chat_manager.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method update_chat_title of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/chat_history/chat_manager.py, line 234.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/chat_history/chat_manager.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/chat_history/chat_manager.py
Line	233	234
Object	e	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/chat_history/chat_manager.py

Method def update_chat_title(self, conversation_id: int, title: str) -> bool:

```
....
233.  except Exception as e:
234.  logger.error(f"Error updating chat title: {e}")
```

Information Exposure Through an Error Message\Path 120:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=156
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method upsert_prompt, at line 236 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/prompt_manager.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method upsert_prompt of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/prompt_manager.py, line 237.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/prompt_manager.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/prompt_manager.py
Line	236	237
Object	e	error

Code Snippet

File Name	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/prompt_manager.py
Method	def upsert_prompt(

```
....
236.  except Exception as e:
237.  logger.error(f"Error upserting prompt '{prompt_key}': {e}")
```

Information Exposure Through an Error Message\Path 121:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=157
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method format_results_for_display, at line 237 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/query_executor.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method format_results_for_display of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/query_executor.py, line 238.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/query_executor.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/query_executor.py
Line	237	238
Object	e	error

Code Snippet

File Name	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/query_executor.py
Method	def format_results_for_display(self, results: List[Dict]) -> str:

```
....
237.  except Exception as e:
238.  logger.error(f"Error formatting results: {e}")
```

Information Exposure Through an Error Message\Path 122:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=158
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method list_tables, at line 238 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_manager.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method list_tables of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_manager.py, line 239.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_manager.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_manager.py
Line	238	239
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_manager.py
Method def list_tables(self):

```
....
238.  except Exception as e:
239.  logger.error(f"Error listing tables: {e}")
```

Information Exposure Through an Error Message\Path 123:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=159
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method analyze, at line 244 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method analyze of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py, line 245.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py
Line	244	245
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py
Method def analyze(self, question: str) -> Dict[str, Any]:

```
....
244.  except Exception as e:
245.  logger.error(f"Error in analysis: {e}")
```

Information Exposure Through an Error Message\Path 124:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-

	ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=160
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method run_index_migrations, at line 244 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/migrations.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to warning, in method run_index_migrations of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/migrations.py, line 245.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/migrations.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/migrations.py
Line	244	245
Object	e	warning

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/migrations.py
Method def run_index_migrations(session_factory) -> None:

```
....
244.  except Exception as e:
245.  logger.warning(f"Index migration skipped [{idx_name}]: {e}")
```

Information Exposure Through an Error Message\Path 125:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=161
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_filter_options, at line 247 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_filter_options of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 248.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Line	247	248
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Method def get_filter_options(self, user_id: int) -> Dict[str, List[str]]:

```
....
247.  except Exception as e:
248.  logger.error(f"Error fetching filter options: {e}")
```

Information Exposure Through an Error Message\Path 126:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=162
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_dashboard_data, at line 249 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_dashboard_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py, line 250.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py
Line	249	250
Object	e	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/part_labeler_routes.py

Method async def get_dashboard_data(

```
....
249.  except Exception as e:
250.  logger.error(f"Dashboard data error: {e}")
```

Information Exposure Through an Error Message\Path 127:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=163
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method list_chats, at line 253 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/conversations/conversation_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method list_chats of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/conversations/conversation_service.py, line 254.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-	mahindragto-nashik-chatbot-pq-

	5464a1e870d5/backend/services/conversations/conversation_service.py	5464a1e870d5/backend/services/conversations/conversation_service.py
Line	253	254
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/conversations/conversation_service.py
Method def list_chats(self, user_id: int, agent_type: str = "analyst") -> list:

```
....
253.  except Exception as e:
254.  logger.error(f"Error listing chats: {e}", exc_info=True)
```

Information Exposure Through an Error Message\Path 128:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=164
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method stream, at line 253 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to warning, in method stream of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py, line 254.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py
Line	253	254
Object	e	warning

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py
Method def stream(self, user_question: str) -> Generator[Dict[str, Any], None, None]:

```
....
253.  except Exception as e:
254.  logger.warning(f"Error parsing search_standards output: {e}")
```

Information Exposure Through an Error Message\Path 129:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=165
Status	New

Detection Date	11/2/2026 2:53:25 PM

Method delete_chat, at line 254 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/chat_history/chat_manager.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method delete_chat of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/chat_history/chat_manager.py, line 255.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/chat_history/chat_manager.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/chat_history/chat_manager.py
Line	254	255
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/chat_history/chat_manager.py
Method def delete_chat(self, conversation_id: int) -> bool:

```
....
254.  except Exception as e:
255.  logger.error(f"Error deleting chat: {e}")
```

Information Exposure Through an Error Message\Path 130:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=166
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method upload_layered_audit, at line 268 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/z_satge/layered_audit.py, handles an Exception or runtime Error exc. During the exception handling code, the application exposes the exception details to error, in method upload_layered_audit of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/z_satge/layered_audit.py, line 269.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/z_satge/layered_audit.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/z_satge/layered_audit.py
Line	268	269
Object	exc	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/z_satge/layered_audit.py
Method async def upload_layered_audit(

```
....
268.  except Exception as exc:
269.  logger.error(f"Layered Audit parse error: {exc}")
```

Information Exposure Through an Error Message\Path 131:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=167
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method stream, at line 268 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to warning, in method stream of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py, line 269.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py
Line	268	269
Object	e	warning

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py
Method def stream(self, user_question: str) -> Generator[Dict[str, Any], None, None]:

```
....
268.  except Exception as e:
269.  logger.warning(f"Error parsing search_quality_issues output: {e}")
```

Information Exposure Through an Error Message\Path 132:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=168
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method stream, at line 270 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/standards_guidelines_agent.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to warning, in method stream of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/standards_guidelines_agent.py, line 271.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/standards_g	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/standards_g

	uidelines_agent.py	uidelines_agent.py
Line	270	271
Object	e	warning

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/standards_guidelines_agent.py
Method def stream(self, user_question: str) -> Generator[Dict[str, Any], None, None]:

```
....
270.  except Exception as e:
271.  logger.warning(f"Error parsing search_standards output for
citations: {e}")
```

Information Exposure Through an Error Message\Path 133:

Severity Low
Result State To Verify
Online Results https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=169
Status New
Detection Date 11/2/2026 2:53:25 PM

Method delete_chat, at line 274 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/conversations/conversation_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method delete_chat of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/conversations/conversation_service.py, line 275.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/conversations/conversation_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/conversations/conversation_service.py
Line	274	275
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/conversations/conversation_service.py
Method def delete_chat(self, conversation_id: int) -> bool:

```
....
274.  except Exception as e:
275.  logger.error(f"Error deleting conversation: {e}", exc_info=True)
```

Information Exposure Through an Error Message\Path 134:

Severity Low
Result State To Verify
Online Results https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=170

Status	New
Detection Date	11/2/2026 2:53:25 PM

Method seed_default_prompts, at line 288 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/prompt_manager.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method seed_default_prompts of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/prompt_manager.py, line 289.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/prompt_manager.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/prompt_manager.py
Line	288	289
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/prompt_manager.py
Method def seed_default_prompts(self, force_update: bool = False) -> Dict[str, bool]:

```
....
288.  except Exception as e:
289.  logger.error(f"Error in seed_default_prompts: {e}")
```

Information Exposure Through an Error Message\Path 135:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=171
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_detailed_warranty_csv, at line 292 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_detailed_warranty_csv of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 293.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Line	292	293
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py

Method	def get_detailed_warranty_csv(self, user_id: int, part_name: str, month: Optional[list[str]] = None, base_model: Optional[list[str]] = None, mis_bucket: Optional[list[str]] = None, mfg_qtr: Optional[list[str]] = None) -> str:

```
....
292.  except Exception as e:
293.  logger.error(f"Error generating CSV: {e}")
```

Information Exposure Through an Error Message\Path 136:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=172
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method run_data_migrations, at line 293 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/migrations.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to warning, in method run_data_migrations of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/migrations.py, line 294.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/migrations.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/migrations.py
Line	293	294
Object	e	warning

Code Snippet

File Name	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/migrations.py
Method	def run_data_migrations(session_factory) -> None:

```
....
293.  except Exception as e:
294.  logger.warning(f"Data migration skipped [{sql[:60].strip()}]:
{e}")
```

Information Exposure Through an Error Message\Path 137:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=173
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method upsert_feedback, at line 297 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/conversations/conversation_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method upsert_feedback of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/conversations/conversation_service.py, line 298.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/conversations/conversation_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/conversations/conversation_service.py
Line	297	298
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/conversations/conversation_service.py
Method def upsert_feedback(self, conversation_id: int, message_id: int, payload) -> str:

```
....
297.  except Exception as e:
298.  logger.error(f"Error saving feedback: {e}")
```

Information Exposure Through an Error Message\Path 138:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=174
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method websocket_endpoint, at line 300 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/conversations/conversation_routes.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method websocket_endpoint of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/conversations/conversation_routes.py, line 301.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/conversations/conversation_routes.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/conversations/conversation_routes.py
Line	300	301
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/conversations/conversation_routes.py
Method async def websocket_endpoint(

```
....
300.  except Exception as e:
301.  logger.error(f"WebSocket error: {e}", exc_info=True)
```

Information Exposure Through an Error Message\Path 139:

Severity	Low
Result State	To Verify

Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=175
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method upload_excel, at line 301 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/z_satge/input_records.py, handles an Exception or runtime Error exc. During the exception handling code, the application exposes the exception details to error, in method upload_excel of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/z_satge/input_records.py, line 302.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/z_satge/input_records.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/z_satge/input_records.py
Line	301	302
Object	exc	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/z_satge/input_records.py

Method async def upload_excel(

```
....
301.  except Exception as exc:
302.  logger.error(f"Excel parse error: {exc}")
```

Information Exposure Through an Error Message\Path 140:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=176
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method stream, at line 312 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_dashboard_agent.py, handles an Exception or runtime Error _ce. During the exception handling code, the application exposes the exception details to debug, in method stream of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_dashboard_agent.py, line 313.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_dashboard_agent.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_dashboard_agent.py
Line	312	313
Object	_ce	debug

Code Snippet

File Name	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_dashboard_agent.py
Method	def stream(self, user_question: str) -> Generator[Dict[str, Any], None, None]:

```
....
312.  except Exception as _ce:
313.  logger.debug(f"generate_chart ToolMessage parse error: {_ce}")
```

Information Exposure Through an Error Message\Path 141:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=177
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method delete_conversation, at line 343 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/conversations/conversation_routes.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method delete_conversation of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/conversations/conversation_routes.py, line 344.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/conversations/conversation_routes.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/conversations/conversation_routes.py
Line	343	344
Object	e	error

Code Snippet

File Name	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/conversations/conversation_routes.py
Method	async def delete_conversation(

```
....
343.  except Exception as e:
344.  logger.error(f"Error deleting conversation: {e}", exc_info=True)
```

Information Exposure Through an Error Message\Path 142:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=178
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method process_document, at line 377 of mahindragto-nashik-chatbot-pq-5464a1e870d5/dataloader/embedding/embedding_creator.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method process_document of mahindragto-nashik-chatbot-pq-5464a1e870d5/dataloader/embedding/embedding_creator.py, line 378.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/dataloader/embedding/embedding_creator.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/dataloader/embedding/embedding_creator.py
Line	377	378
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/dataloader/embedding/embedding_creator.py
Method def process_document(self, doc: Dict[str, Any]) -> Dict[str, Any]:

```
....
377.  except Exception as e:
378.  logger.error(f"Error processing document {doc['doc_name']}: {e}")
```

Information Exposure Through an Error Message\Path 143:

Severity Low
Result State To Verify
Online Results https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=179
Status New
Detection Date 11/2/2026 2:53:25 PM

Method analyze, at line 385 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/standards_guidelines_agent.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method analyze of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/standards_guidelines_agent.py, line 386.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/standards_guidelines_agent.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/standards_guidelines_agent.py
Line	385	386
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/standards_guidelines_agent.py
Method def analyze(self, question: str) -> Dict[str, Any]:

```
....
385.  except Exception as e:
386.  logger.error(f"Error in Standards & Guidelines analysis: {e}")
```

Information Exposure Through an Error Message\Path 144:

Severity Low
Result State To Verify

Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=180
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method upload_layered_audit_adherence, at line 390 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/z_satge/layered_audit.py, handles an Exception or runtime Error exc. During the exception handling code, the application exposes the exception details to error, in method upload_layered_audit_adherence of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/z_satge/layered_audit.py, line 391.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/z_satge/layered_audit.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/z_satge/layered_audit.py
Line	390	391
Object	exc	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/api/routes/z_satge/layered_audit.py
Method async def upload_layered_audit_adherence(

```
....
390.  except Exception as exc:
391.  logger.error(f"Layered Audit Adherence parse error: {exc}")
```

Information Exposure Through an Error Message\Path 145:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=181
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method analyze, at line 413 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method analyze of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py, line 414.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py
Line	413	414
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/qlense_agent.py

Method	def analyze(self, question: str) -> Dict[str, Any]:

```
....
413.  except Exception as e:
414.  logger.error(f"Error in QLense analysis: {e}")
```

Information Exposure Through an Error Message\Path 146:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=182
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method analyze, at line 445 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_dashboard_agent.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method analyze of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_dashboard_agent.py, line 446.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_dashboard_agent.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_dashboard_agent.py
Line	445	446
Object	e	error

Code Snippet	
File Name	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/part_labeler_dashboard_agent.py
Method	def analyze(self, question: str) -> Dict[str, Any]:

```
....
445.  except Exception as e:
446.  logger.error(f"Error in Part Labeler Dashboard analysis: {e}")
```

Information Exposure Through an Error Message\Path 147:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=183
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method process_mapped_rpt_data, at line 491 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method process_mapped_rpt_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 492.

	Source	Destination

File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_laboler_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_laboler_service.py
Line	491	492
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Method def process_mapped_rpt_data(self, file_path: str, mapping: Dict[str, str], user_id: int) -> int:

```
....
491.  except Exception as e:
492.  logger.error(f"Error processing RPT data: {e}")
```

Information Exposure Through an Error Message\Path 148:

Severity Low
Result State To Verify
Online Results https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=184
Status New
Detection Date 11/2/2026 2:53:25 PM

Method get_rpt_data, at line 529 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_rpt_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 530.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_laboler_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_laboler_service.py
Line	529	530
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Method def get_rpt_data(self, user_id: int, part_name=None, month=None, base_model=None, mis_bucket=None, mfg_qtr=None, buyoff_stage=None, online_offline=None) -> Any:

```
....
529.  except Exception as e:
530.  logger.error(f"RPT data lookup error: {e}")
```

Information Exposure Through an Error Message\Path 149:

Severity Low

Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=185
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_rpt_dashboard_data, at line 555 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_rpt_dashboard_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 556.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Line	555	556
Object	e	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py

Method def get_rpt_dashboard_data(self, user_id: int, part_name=None, month=None, base_model=None, mis_bucket=None, mfg_qtr=None, buyoff_stage=None, online_offline=None) -> Dict[str, Any]:

```
....
555.  except Exception as e:
556.  logger.error(f"RPT mfgMonth error: {e}")
```

Information Exposure Through an Error Message\Path 150:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=186
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_rpt_dashboard_data, at line 559 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_rpt_dashboard_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 560.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Line	559	560
Object	e	error

Code Snippet	
File Name	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Method	def get_rpt_dashboard_data(self, user_id: int, part_name=None, month=None, base_model=None, mis_bucket=None, mfg_qtr=None, buyoff_stage=None, online_offline=None) -> Dict[str, Any]:

```
....
559.  except Exception as e:
560.  logger.error(f"RPT reportingMonth error: {e}")
```

Information Exposure Through an Error Message\Path 151:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=187
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_rpt_dashboard_data, at line 563 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_rpt_dashboard_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 564.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Line	563	564
Object	e	error

Code Snippet	
File Name	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Method	def get_rpt_dashboard_data(self, user_id: int, part_name=None, month=None, base_model=None, mis_bucket=None, mfg_qtr=None, buyoff_stage=None, online_offline=None) -> Dict[str, Any]:

```
....
563.  except Exception as e:
564.  logger.error(f"RPT shift error: {e}")
```

Information Exposure Through an Error Message\Path 152:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=188
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_rpt_dashboard_data, at line 567 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_rpt_dashboard_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 568.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Line	567	568
Object	e	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py

Method def get_rpt_dashboard_data(self, user_id: int, part_name=None, month=None, base_model=None, mis_bucket=None, mfg_qtr=None, buyoff_stage=None, online_offline=None) -> Dict[str, Any]:

```
....
567.  except Exception as e:
568.  logger.error(f"RPT location error: {e}")
```

Information Exposure Through an Error Message\Path 153:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=189
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method process_mapped_gnovac_data, at line 602 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method process_mapped_gnovac_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 603.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Line	602	603
Object	e	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py

Method def process_mapped_gnovac_data(self, file_path: str, mapping: Dict[str, str], user_id: int) -> int:

```
....
602.  except Exception as e:
603.  logger.error(f"Error processing GNOVAC data: {e}")
```

Information Exposure Through an Error Message\Path 154:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=190
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method _clear_thread_checkpoint, at line 633 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py, handles an Exception or runtime Error ex. During the exception handling code, the application exposes the exception details to warning, in method _clear_thread_checkpoint of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py, line 634.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py
Line	633	634
Object	ex	warning

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py
Method def _clear_thread_checkpoint(self):

```
....
633.  except Exception as ex:
634.  logger.warning(f"[thread={self.thread_id}] Could not clear
checkpoint: {ex}")
```

Information Exposure Through an Error Message\Path 155:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=191
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_gnovac_data, at line 636 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_gnovac_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 637.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-	mahindragto-nashik-chatbot-pq-

	5464a1e870d5/backend/services/part_labeler_service.py	5464a1e870d5/backend/services/part_labeler_service.py
Line	636	637
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Method def get_gnovac_data(self, user_id: int, part_name=None, month=None, base_model=None, mis_bucket=None, mfg_qtr=None) -> Any:

```
....
636.  except Exception as e:
637.  logger.error(f"GNOVAC data lookup error: {e}")
```

Information Exposure Through an Error Message\Path 156:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=192
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_gnovac_dashboard_data, at line 660 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_gnovac_dashboard_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 661.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Line	660	661
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Method def get_gnovac_dashboard_data(self, user_id: int, part_name=None, month=None, base_model=None, mis_bucket=None, mfg_qtr=None) -> Dict[str, Any]:

```
....
660.  except Exception as e:
661.  logger.error(f"GNOVAC mfgMonth error: {e}")
```

Information Exposure Through an Error Message\Path 157:

Severity	Low
Result State	To Verify

Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=193
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_gnovac_dashboard_data, at line 664 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_gnovac_dashboard_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 665.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Line	664	665
Object	e	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py

Method def get_gnovac_dashboard_data(self, user_id: int, part_name=None, month=None, base_model=None, mis_bucket=None, mfg_qtr=None) -> Dict[str, Any]:

```
....
664.  except Exception as e:
665.  logger.error(f"GNOVAC reportingMonth error: {e}")
```

Information Exposure Through an Error Message\Path 158:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=194
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_gnovac_dashboard_data, at line 668 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_gnovac_dashboard_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 669.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Line	668	669
Object	e	error

Code Snippet	
File Name	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Method	def get_gnovac_dashboard_data(self, user_id: int, part_name=None, month=None, base_model=None, mis_bucket=None, mfg_qtr=None) -> Dict[str, Any]:

```
....
668.  except Exception as e:
669.  logger.error(f"GNOVAC pointer error: {e}")
```

Information Exposure Through an Error Message\Path 159:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=195
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_gnovac_dashboard_data, at line 672 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_gnovac_dashboard_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 673.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Line	672	673
Object	e	error

Code Snippet	
File Name	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Method	def get_gnovac_dashboard_data(self, user_id: int, part_name=None, month=None, base_model=None, mis_bucket=None, mfg_qtr=None) -> Dict[str, Any]:

```
....
672.  except Exception as e:
673.  logger.error(f"GNOVAC location error: {e}")
```

Information Exposure Through an Error Message\Path 160:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=196
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method process_mapped_rfi_data, at line 708 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method process_mapped_rfi_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 709.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Line	708	709
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Method def process_mapped_rfi_data(self, file_path: str, mapping: Dict[str, str], user_id: int) -> int:

```
....
708.  except Exception as e:
709.  logger.error(f"Error processing RFI data: {e}")
```

Information Exposure Through an Error Message\Path 161:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=197
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_rfi_data, at line 744 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_rfi_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 745.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Line	744	745
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Method def get_rfi_data(self, user_id: int, part_name=None, month=None, base_model=None, mis_bucket=None, mfg_qtr=None, defect_type=None) -> Any:

```
....
744.  except Exception as e:
745.  logger.error(f"RFI data lookup error: {e}")
```

Information Exposure Through an Error Message\Path 162:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=198
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_rfi_dashboard_data, at line 769 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_rfi_dashboard_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 770.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Line	769	770
Object	e	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py

Method def get_rfi_dashboard_data(self, user_id: int, part_name=None, month=None, base_model=None, mis_bucket=None, mfg_qtr=None, defect_type=None) -> Dict[str, Any]:

```
....
769.  except Exception as e:
770.  logger.error(f"RFI mfgMonth error: {e}")
```

Information Exposure Through an Error Message\Path 163:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=199
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_rfi_dashboard_data, at line 773 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_rfi_dashboard_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 774.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Line	773	774
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Method def get_rfi_dashboard_data(self, user_id: int, part_name=None, month=None, base_model=None, mis_bucket=None, mfg_qtr=None, defect_type=None) -> Dict[str, Any]:

```
....
773.  except Exception as e:
774.  logger.error(f"RFI reportingMonth error: {e}")
```

Information Exposure Through an Error Message\Path 164:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=200
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_rfi_dashboard_data, at line 777 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_rfi_dashboard_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 778.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Line	777	778
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Method def get_rfi_dashboard_data(self, user_id: int, part_name=None, month=None, base_model=None, mis_bucket=None, mfg_qtr=None, defect_type=None) -> Dict[str, Any]:

```
....
777.  except Exception as e:
778.  logger.error(f"RFI severity/defecttype error: {e}")
```

Information Exposure Through an Error Message\Path 165:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=201
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_rfi_dashboard_data, at line 781 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_rfi_dashboard_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 782.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Line	781	782
Object	e	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py

Method def get_rfi_dashboard_data(self, user_id: int, part_name=None, month=None, base_model=None, mis_bucket=None, mfg_qtr=None, defect_type=None) -> Dict[str, Any]:

```
....
781.  except Exception as e:
782.  logger.error(f"RFI location error: {e}")
```

Information Exposure Through an Error Message\Path 166:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=202
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method process_mapped_esqa_data, at line 820 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method process_mapped_esqa_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 821.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py

Line	820	821
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Method def process_mapped_esqa_data(self, file_path: str, mapping: Dict[str, str], user_id: int) -> int:

```
....
820.  except Exception as e:
821.  logger.error(f"Error processing e-SQA data: {e}")
```

Information Exposure Through an Error Message\Path 167:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=203
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_esqa_data, at line 854 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_esqa_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 855.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Line	854	855
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Method def get_esqa_data(self, user_id: int, part_name=None, month=None, base_model=None, mis_bucket=None, mfg_qtr=None) -> Any:

```
....
854.  except Exception as e:
855.  logger.error(f"e-SQA data lookup error: {e}")
```

Information Exposure Through an Error Message\Path 168:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=204

Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_esqa_dashboard_data, at line 878 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_esqa_dashboard_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 879.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Line	878	879
Object	e	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py

Method def get_esqa_dashboard_data(self, user_id: int, part_name=None, month=None, base_model=None, mis_bucket=None, mfg_qtr=None) -> Dict[str, Any]:

```
....
878.  except Exception as e:
879.  logger.error(f"e-SQA mfgMonth error: {e}")
```

Information Exposure Through an Error Message\Path 169:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=205
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_esqa_dashboard_data, at line 882 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_esqa_dashboard_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 883.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Line	882	883
Object	e	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py

Method	def get_esqa_dashboard_data(self, user_id: int, part_name=None, month=None, base_model=None, mis_bucket=None, mfg_qtr=None) -> Dict[str, Any]:

```
....
882.  except Exception as e:
883.  logger.error(f"e-SQA reportingMonth error: {e}")
```

Information Exposure Through an Error Message\Path 170:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=206
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_esqa_dashboard_data, at line 886 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_esqa_dashboard_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 887.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Line	886	887
Object	e	error

Code Snippet	
File Name	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Method	def get_esqa_dashboard_data(self, user_id: int, part_name=None, month=None, base_model=None, mis_bucket=None, mfg_qtr=None) -> Dict[str, Any]:

```
....
886.  except Exception as e:
887.  logger.error(f"e-SQA concern source error: {e}")
```

Information Exposure Through an Error Message\Path 171:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=207
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_esqa_dashboard_data, at line 890 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_esqa_dashboard_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 891.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Line	890	891
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Method def get_esqa_dashboard_data(self, user_id: int, part_name=None, month=None, base_model=None, mis_bucket=None, mfg_qtr=None) -> Dict[str, Any]:

```
....
890.  except Exception as e:
891.  logger.error(f"e-SQA location error: {e}")
```

Information Exposure Through an Error Message\Path 172:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=208
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_dashboard_data, at line 926 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_dashboard_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 927.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Line	926	927
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Method def get_dashboard_data(self, user_id: int, part_name: Optional[list[str]] = None, month: Optional[list[str]] = None, base_model: Optional[list[str]] = None, mis_bucket: Optional[list[str]] = None, mfg_qtr: Optional[list[str]] = None) -> Dict[str, Any]:

```
....
926.  except Exception as e:
927.  logger.error(f"Error fetching MFG Month dashboard data: {e}")
```

Information Exposure Through an Error Message\Path 173:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=209
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_dashboard_data, at line 942 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_dashboard_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 943.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Line	942	943
Object	e	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py

Method def get_dashboard_data(self, user_id: int, part_name: Optional[list[str]] = None, month: Optional[list[str]] = None, base_model: Optional[list[str]] = None, mis_bucket: Optional[list[str]] = None, mfg_qtr: Optional[list[str]] = None) -> Dict[str, Any]:

```
....
942.  except Exception as e:
943.  logger.error(f"Error fetching Reporting Month dashboard data:
{e}")
```

Information Exposure Through an Error Message\Path 174:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=210
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_dashboard_data, at line 952 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_dashboard_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 953.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_la	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_la

	beler_service.py	beler_service.py
Line	952	953
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Method def get_dashboard_data(self, user_id: int, part_name: Optional[list[str]] = None, month: Optional[list[str]] = None, base_model: Optional[list[str]] = None, mis_bucket: Optional[list[str]] = None, mfg_qtr: Optional[list[str]] = None) -> Dict[str, Any]:

```
....
952.  except Exception as e:
953.  logger.error(f"Error fetching KMS dashboard data: {e}")
```

Information Exposure Through an Error Message\Path 175:

Severity Low
Result State To Verify
Online Results https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=211
Status New
Detection Date 11/2/2026 2:53:25 PM

Method get_dashboard_data, at line 962 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_dashboard_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 963.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Line	962	963
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Method def get_dashboard_data(self, user_id: int, part_name: Optional[list[str]] = None, month: Optional[list[str]] = None, base_model: Optional[list[str]] = None, mis_bucket: Optional[list[str]] = None, mfg_qtr: Optional[list[str]] = None) -> Dict[str, Any]:

```
....
962.  except Exception as e:
963.  logger.error(f"Error fetching Region dashboard data: {e}")
```

Information Exposure Through an Error Message\Path 176:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=212
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_dashboard_data, at line 966 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_dashboard_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 967.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Line	966	967
Object	e	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py

Method def get_dashboard_data(self, user_id: int, part_name: Optional[list[str]] = None, month: Optional[list[str]] = None, base_model: Optional[list[str]] = None, mis_bucket: Optional[list[str]] = None, mfg_qtr: Optional[list[str]] = None) -> Dict[str, Any]:

```
....
966.  except Exception as e:
967.  logger.error(f"Global error fetching dashboard data: {e}")
```

Information Exposure Through an Error Message\Path 177:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=213
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method process_mapped_ev_data, at line 1003 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method process_mapped_ev_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 1004.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Line	1003	1004

Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Method def process_mapped_ev_data(self, file_path: str, mapping: Dict[str, str], user_id: int) -> int:

```
....
1003.  except Exception as e:
1004.  logger.error(f"Error processing EV data: {e}")
```

Information Exposure Through an Error Message\Path 178:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=214
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_ev_data, at line 1039 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_ev_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 1040.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Line	1039	1040
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Method def get_ev_data(self, user_id: int, part_name=None, month=None, base_model=None, mis_bucket=None, mfg_qtr=None, battery_motor=None) -> Any:

```
....
1039.  except Exception as e:
1040.  logger.error(f"EV data lookup error: {e}")
```

Information Exposure Through an Error Message\Path 179:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=215
Status	New

Detection Date	11/2/2026 2:53:25 PM

Method get_ev_dashboard_data, at line 1067 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_ev_dashboard_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 1068.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Line	1067	1068
Object	e	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py

Method def get_ev_dashboard_data(self, user_id: int, part_name=None, month=None, base_model=None, mis_bucket=None, mfg_qtr=None, battery_motor=None) -> Dict[str, Any]:

```
....
1067.  except Exception as e:
1068.  logger.error(f"EV mfgMonth error: {e}")
```

Information Exposure Through an Error Message\Path 180:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=216
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_ev_dashboard_data, at line 1071 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_ev_dashboard_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 1072.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Line	1071	1072
Object	e	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py

Method	def get_ev_dashboard_data(self, user_id: int, part_name=None, month=None, base_model=None, mis_bucket=None, mfg_qtr=None, battery_motor=None) -> Dict[str, Any]:

```
....
1071.  except Exception as e:
1072.  logger.error(f"EV reportingMonth error: {e}")
```

Information Exposure Through an Error Message\Path 181:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=217
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_ev_dashboard_data, at line 1075 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method get_ev_dashboard_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 1076.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Line	1075	1076
Object	e	error

Code Snippet

File Name	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Method	def get_ev_dashboard_data(self, user_id: int, part_name=None, month=None, base_model=None, mis_bucket=None, mfg_qtr=None, battery_motor=None) -> Dict[str, Any]:

```
....
1075.  except Exception as e:
1076.  logger.error(f"EV km range error: {e}")
```

Information Exposure Through an Error Message\Path 182:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=218
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method get_ev_dashboard_data, at line 1079 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to

error, in method get_ev_dashboard_data of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py, line 1080.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Line	1079	1080
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/part_labeler_service.py
Method def get_ev_dashboard_data(self, user_id: int, part_name=None, month=None, base_model=None, mis_bucket=None, mfg_qtr=None, battery_motor=None) -> Dict[str, Any]:

```
....
1079.  except Exception as e:
1080.  logger.error(f"EV state error: {e}")
```

Information Exposure Through an Error Message\Path 183:

Severity Low
Result State To Verify
Online Results https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=219
Status New
Detection Date 11/2/2026 2:53:25 PM

Method process_warranty_to_db, at line 102 of mahindragto-nashik-chatbot-pq-5464a1e870d5/scripts/process_warranty.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method process_warranty_to_db of mahindragto-nashik-chatbot-pq-5464a1e870d5/scripts/process_warranty.py, line 103.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/scripts/process_warranty.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/scripts/process_warranty.py
Line	102	103
Object	e	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/scripts/process_warranty.py
Method def process_warranty_to_db():

```
....
102.  except Exception as e:
103.  logger.error(f"Error processing warranty data: {str(e)}")
```

Information Exposure Through an Error Message\Path 184:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=220
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method process_document, at line 281 of mahindragto-nashik-chatbot-pq-5464a1e870d5/dataloader/embedding/embedding_creator.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method process_document of mahindragto-nashik-chatbot-pq-5464a1e870d5/dataloader/embedding/embedding_creator.py, line 284.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/dataloader/embedding/embedding_creator.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/dataloader/embedding/embedding_creator.py
Line	281	284
Object	e	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/dataloader/embedding/embedding_creator.py

Method def process_document(self, doc: Dict[str, Any]) -> Dict[str, Any]:

```
....
281.  except Exception as e:
....
284.  logger.error(f"  ✗ PDF conversion failed: {str(e)}")
```

Information Exposure Through an Error Message\Path 185:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=221
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method _initialize_database, at line 81 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/startup_initializer.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to error, in method setup of mahindragto-nashik-chatbot-pq-5464a1e870d5/tasks.py, line 52.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/startup_initializer.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/tasks.py
Line	81	52
Object	e	error

Code Snippet	
File Name	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/services/startup_initializer.py
Method	def _initialize_database(self) -> Dict[str, Any]:

```
....
81.  except Exception as e:
```

File Name	mahindragto-nashik-chatbot-pq-5464a1e870d5/tasks.py
Method	def setup(ctx):

```
....
52.  logger.error(f"  {step}: {result['message']}")
```

Information Exposure Through an Error Message\Path 186:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=222
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method execute_cypher, at line 110 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/query_executor.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to debug, in method _initialize_agent of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py, line 206.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/query_executor.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py
Line	110	206
Object	e	debug

Code Snippet	
File Name	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/utils/query_executor.py
Method	def execute_cypher(

```
....
110.  except Exception as e:
```

File Name	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py
Method	def _initialize_agent(self):

```
....
206.  logger.debug(
```

Information Exposure Through an Error Message\Path 187:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=223
Status	New
Detection Date	11/2/2026 2:53:25 PM

Method generate_query, at line 108 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/cypher_agent.py, handles an Exception or runtime Error e. During the exception handling code, the application exposes the exception details to debug, in method _initialize_agent of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py, line 206.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/cypher_agent.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py
Line	108	206
Object	e	debug

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/cypher_agent.py

Method def generate_query(self, question: str) -> Dict[str, Any]:

```
....
108.  except Exception as e:
```

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/agents/analyst_agent.py

Method def _initialize_agent(self):

```
....
206.  logger.debug(
```

Filtering Sensitive Logs

Query Path:
Python\Cx\Python Low Visibility\Filtering Sensitive Logs Version:3

Categories

OWASP Top 10 2013: A6-Sensitive Data Exposure
OWASP Top 10 2017: A3-Sensitive Data Exposure
OWASP ASVS: V07 Error Handling and Logging
OWASP Top 10 2021: A9-Security Logging and Monitoring Failures
PCI DSS v3.2.1: PCI DSS (3.2.1) - 6.5.8 - Improper access control
ASA Premium: ASA Premium

Top Tier: Top Tier
PCI DSS v4.0: PCI DSS (4.0) - 6.2.4 Vulnerabilities in software development

Description

Filtering Sensitive Logs\Path 1:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=17
Status	New
Detection Date	11/2/2026 2:53:25 PM

The application logs various user events, and in method execute_query writes sensitive user details to debug, in mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py at line 96. These details include user- or session-specific data, such as AuthService, at line 37 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py in the signup method.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py
Line	37	96
Object	AuthService	debug

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py

Method def signup(self, username: str, first_name: str, last_name: str, email: str, password: str) -> dict:

```
....
37.  rows = self.db.execute_query(
```

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py

Method def execute_query(self, query: str, params: Dict[str, Any] = None) -> List[Any]:

```
....
96.  logger.debug(f"Query returned {len(rows)} rows")
```

Filtering Sensitive Logs\Path 2:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=18
Status	New
Detection Date	11/2/2026 2:53:25 PM

The application logs various user events, and in method execute_query writes sensitive user details to error, in mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py at line 100. These details include user- or session-specific data, such as AuthService, at line 37 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py in the signup method.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py
Line	37	100
Object	AuthService	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py

Method def signup(self, username: str, first_name: str, last_name: str, email: str, password: str) -> dict:

```
....
37.  rows = self.db.execute_query(
```

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py

Method def execute_query(self, query: str, params: Dict[str, Any] = None) -> List[Any]:

```
....
100.  logger.error(f"Error executing query: {e}")
```

Filtering Sensitive Logs\Path 3:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=19
Status	New
Detection Date	11/2/2026 2:53:25 PM

The application logs various user events, and in method get_session writes sensitive user details to error, in mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py at line 71. These details include user- or session-specific data, such as AuthService, at line 37 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py in the signup method.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py
Line	37	71
Object	AuthService	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py
Method def signup(self, username: str, first_name: str, last_name: str, email: str, password: str) -> dict:

```
....
37.  rows = self.db.execute_query(
```

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py
Method def get_session(self) -> Session:

```
....
71.  logger.error(f"Session error: {e}")
```

Filtering Sensitive Logs\Path 4:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=20
Status	New
Detection Date	11/2/2026 2:53:25 PM

The application logs various user events, and in method execute_insert writes sensitive user details to error, in mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py at line 151. These details include user- or session-specific data, such as AuthService, at line 37 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py in the signup method.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py
Line	37	151
Object	AuthService	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py
Method def signup(self, username: str, first_name: str, last_name: str, email: str, password: str) -> dict:

```
....
37.  rows = self.db.execute_query(
```

File Name	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py
Method	def execute_insert(self, query: str, params: Dict[str, Any] = None) -> Any:

```
....
151.  logger.error(f"Error executing insert: {e}")
```

Filtering Sensitive Logs\Path 5:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=21
Status	New
Detection Date	11/2/2026 2:53:25 PM

The application logs various user events, and in method execute_query writes sensitive user details to debug, in mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py at line 96. These details include user- or session-specific data, such as AuthService, at line 45 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py in the signup method.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py
Line	45	96
Object	AuthService	debug

Code Snippet

File Name	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py
Method	def signup(self, username: str, first_name: str, last_name: str, email: str, password: str) -> dict:

```
....
45.  rows = self.db.execute_query(
```

File Name	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py
Method	def execute_query(self, query: str, params: Dict[str, Any] = None) -> List[Any]:

```
....
96.  logger.debug(f"Query returned {len(rows)} rows")
```

Filtering Sensitive Logs\Path 6:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-

	ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=22
Status	New
Detection Date	11/2/2026 2:53:25 PM

The application logs various user events, and in method execute_query writes sensitive user details to error, in mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py at line 100. These details include user- or session-specific data, such as AuthService, at line 45 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py in the signup method.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py
Line	45	100
Object	AuthService	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py

Method def signup(self, username: str, first_name: str, last_name: str, email: str, password: str) -> dict:

```
....
45.  rows = self.db.execute_query(
```

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py

Method def execute_query(self, query: str, params: Dict[str, Any] = None) -> List[Any]:

```
....
100.  logger.error(f"Error executing query: {e}")
```

Filtering Sensitive Logs\Path 7:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=23
Status	New
Detection Date	11/2/2026 2:53:25 PM

The application logs various user events, and in method execute_insert writes sensitive user details to error, in mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py at line 151. These details include user- or session-specific data, such as AuthService, at line 45 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py in the signup method.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-	mahindragto-nashik-chatbot-pq-

	5464a1e870d5/backend/services/auth/auth_service.py	5464a1e870d5/app/connectors/state_db_connector.py
Line	45	151
Object	AuthService	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py
Method def signup(self, username: str, first_name: str, last_name: str, email: str, password: str) -> dict:

```
....
45.  rows = self.db.execute_query(
```

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py
Method def execute_insert(self, query: str, params: Dict[str, Any] = None) -> Any:

```
....
151.  logger.error(f"Error executing insert: {e}")
```

Filtering Sensitive Logs\Path 8:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=24
Status	New
Detection Date	11/2/2026 2:53:25 PM

The application logs various user events, and in method get_session writes sensitive user details to error, in mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py at line 71. These details include user- or session-specific data, such as AuthService, at line 45 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py in the signup method.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py
Line	45	71
Object	AuthService	error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py
Method def signup(self, username: str, first_name: str, last_name: str, email: str, password: str) -> dict:

```
....
45.  rows = self.db.execute_query(
```

File Name	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py
Method	def get_session(self) -> Session:

```
....
71.  logger.error(f"Session error: {e}")
```

Filtering Sensitive Logs\Path 9:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=25
Status	New
Detection Date	11/2/2026 2:53:25 PM

The application logs various user events, and in method execute_insert writes sensitive user details to error, in mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py at line 151. These details include user- or session-specific data, such as AuthService, at line 54 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py in the signup method.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py
Line	54	151
Object	AuthService	error

Code Snippet

File Name	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py
Method	def signup(self, username: str, first_name: str, last_name: str, email: str, password: str) -> dict:

```
....
54.  user_id = self.db.execute_insert(
```

File Name	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py
Method	def execute_insert(self, query: str, params: Dict[str, Any] = None) -> Any:

```
....
151.  logger.error(f"Error executing insert: {e}")
```

Filtering Sensitive Logs\Path 10:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=26
Status	New
Detection Date	11/2/2026 2:53:25 PM

The application logs various user events, and in method get_session writes sensitive user details to error, in mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py at line 71. These details include user- or session-specific data, such as AuthService, at line 54 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py in the signup method.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py
Line	54	71
Object	AuthService	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py

Method def signup(self, username: str, first_name: str, last_name: str, email: str, password: str) -> dict:

```
....
54.  user_id = self.db.execute_insert(
```

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py

Method def get_session(self) -> Session:

```
....
71.  logger.error(f"Session error: {e}")
```

Filtering Sensitive Logs\Path 11:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=27
Status	New
Detection Date	11/2/2026 2:53:25 PM

The application logs various user events, and in method execute_query writes sensitive user details to debug, in mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py at line 96. These details include user- or

session-specific data, such as AuthService, at line 82 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py in the login method.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py
Line	82	96
Object	AuthService	debug

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py

Method def login(self, username: str, password: str) -> dict:

```
....
82.  rows = self.db.execute_query(
```

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py

Method def execute_query(self, query: str, params: Dict[str, Any] = None) -> List[Any]:

```
....
96.  logger.debug(f"Query returned {len(rows)} rows")
```

Filtering Sensitive Logs\Path 12:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=28
Status	New
Detection Date	11/2/2026 2:53:25 PM

The application logs various user events, and in method execute_query writes sensitive user details to error, in mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py at line 100. These details include user- or session-specific data, such as AuthService, at line 82 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py in the login method.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py
Line	82	100
Object	AuthService	error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py

Method	def login(self, username: str, password: str) -> dict:

```
....
82.  rows = self.db.execute_query(
```

File Name	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py
Method	def execute_query(self, query: str, params: Dict[str, Any] = None) -> List[Any]:

```
....
100.  logger.error(f"Error executing query: {e}")
```

Filtering Sensitive Logs\Path 13:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=29
Status	New
Detection Date	11/2/2026 2:53:25 PM

The application logs various user events, and in method get_session writes sensitive user details to error, in mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py at line 71. These details include user- or session-specific data, such as AuthService, at line 82 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py in the login method.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py
Line	82	71
Object	AuthService	error

Code Snippet

File Name	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py
Method	def login(self, username: str, password: str) -> dict:

```
....
82.  rows = self.db.execute_query(
```

File Name	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/state_db_connector.py
Method	def get_session(self) -> Session:

```
....
71.  logger.error(f"Session error: {e}")
```

Filtering Sensitive Logs\Path 14:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=30
Status	New
Detection Date	11/2/2026 2:53:25 PM

The application logs various user events, and in method signup writes sensitive user details to info, in mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py at line 67. These details include user- or session-specific data, such as "password_hash", at line 61 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py in the signup method.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py
Line	61	67
Object	"password_hash"	info

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py

Method def signup(self, username: str, first_name: str, last_name: str, email: str, password: str) -> dict:

```
....
61.  "password_hash": password_hash,
....
67.  logger.info(f"New user registered: {username} (id={user_id})")
```

Filtering Sensitive Logs\Path 15:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=31
Status	New
Detection Date	11/2/2026 2:53:25 PM

The application logs various user events, and in method signup writes sensitive user details to info, in mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py at line 67. These details include user- or session-specific data, such as AuthQueries, at line 55 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py in the signup method.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py

Line	55	67
Object	AuthQueries	info

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py
Method def signup(self, username: str, first_name: str, last_name: str, email: str, password: str) -> dict:

```
....
55.  AuthQueries.REGISTER_USER,
....
67.  logger.info(f"New user registered: {username} (id={user_id})")
```

Filtering Sensitive Logs\Path 16:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=32
Status	New
Detection Date	11/2/2026 2:53:25 PM

The application logs various user events, and in method login writes sensitive user details to info, in mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py at line 91. These details include user- or session-specific data, such as "password_hash", at line 84 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py in the login method.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py
Line	84	91
Object	"password_hash"	info

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py
Method def login(self, username: str, password: str) -> dict:

```
....
84.  {"username": username, "password_hash": password_hash},
....
91.  logger.info(f"User logged in: {row[1]} (id={row[0]})
role={row[4]}")
```

Filtering Sensitive Logs\Path 17:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pa

	thid=33
Status	New
Detection Date	11/2/2026 2:53:25 PM

The application logs various user events, and in method login writes sensitive user details to info, in mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py at line 91. These details include user- or session-specific data, such as AUTHENTICATE_USER, at line 83 of mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py in the login method.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py
Line	83	91
Object	AUTHENTICATE_USER	info

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/auth/auth_service.py

Method def login(self, username: str, password: str) -> dict:

```
....
83.  AuthQueries.AUTHENTICATE_USER,
....
91.  logger.info(f"User logged in: {row[1]} (id={row[0]})
role={row[4]}")
```

Filtering Sensitive Logs\Path 18:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=34
Status	New
Detection Date	11/2/2026 2:53:25 PM

The application logs various user events, and in method process_streaming writes sensitive user details to info, in mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/conversations/conversation_service.py at line 144. These details include user- or session-specific data, such as NEO4J_PASSWORD, at line 31 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/neo4j_connector.py in the _connect method.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/neo4j_connector.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/conversations/conversation_service.py
Line	31	144
Object	NEO4J_PASSWORD	info

Code Snippet

File Name	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/neo4j_connector.py
Method	def _connect(self):

```
....
31.  password=self.settings.NEO4J_PASSWORD,
```

File Name	mahindragto-nashik-chatbot-pq-5464a1e870d5/backend/services/conversations/conversation_service.py
Method	def process_streaming(

```
....
144.  logger.info(
```

Filtering Sensitive Logs\Path 19:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=35
Status	New
Detection Date	11/2/2026 2:53:25 PM

The application logs various user events, and in method save_message writes sensitive user details to info, in mahindragto-nashik-chatbot-pq-5464a1e870d5/app/chat_history/chat_manager.py at line 92. These details include user- or session-specific data, such as NEO4J_PASSWORD, at line 31 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/neo4j_connector.py in the _connect method.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/neo4j_connector.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/chat_history/chat_manager.py
Line	31	92
Object	NEO4J_PASSWORD	info

Code Snippet

File Name	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/neo4j_connector.py
Method	def _connect(self):

```
....
31.  password=self.settings.NEO4J_PASSWORD,
```

File Name	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/chat_history/chat_manager.py
Method	def save_message(

```
....
92.  logger.info(f"Saved message {message_id} to conversation
{conversation_id}")
```

Filtering Sensitive Logs\Path 20:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=36
Status	New
Detection Date	11/2/2026 2:53:25 PM

The application logs various user events, and in method search_standards writes sensitive user details to info, in mahindragto-nashik-chatbot-pq-5464a1e870d5/app/tools/vector_db_tool.py at line 55. These details include user- or session-specific data, such as OPENSEARCH_PASSWORD, at line 32 of mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/opensearch_connector.py in the __init__ method.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/opensearch_connector.py	mahindragto-nashik-chatbot-pq-5464a1e870d5/app/tools/vector_db_tool.py
Line	32	55
Object	OPENSEARCH_PASSWORD	info

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/connectors/opensearch_connector.py

Method def __init__(self):

```
....
32.  (self.settings.OPENSEARCH_USERNAME,
self.settings.OPENSEARCH_PASSWORD)
```

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/app/tools/vector_db_tool.py

Method def search_standards(query: str, top_k: int = 5) -> str:

```
....
55.  logger.info(
```

Secret Leak in Error Messages

Query Path:
JavaScript\Cx\JavaScript Low Visibility\Secret Leak in Error Messages Version:1

Categories

CWE top 25: CWE top 25
MOIS(KISA) Secure Coding 2021: MOIS(KISA) Security Functions
OWASP ASVS: V08 Data Protection

OWASP Top 10 2021: A1-Broken Access Control
SANS top 25: SANS top 25
PCI DSS v4.0: PCI DSS (4.0) - 6.2.4 Vulnerabilities in software development

Description

Secret Leak in Error Messages\Path 1:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=228
Status	New
Detection Date	11/2/2026 2:53:27 PM

Method deleteUser at line 43 of mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/adminService.js includes the secret in Error in the error message. This may result in a secret leak.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/adminService.js	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/adminService.js
Line	38	43
Object	userId	Error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/adminService.js
Method async deleteUser(userId) {

```
....
38.
`${backend_url}/admin/users/${userId}?requester_id=${this._adminId()}`,
....
43.  throw new Error(err.detail || "Failed to delete user");
```

Secret Leak in Error Messages\Path 2:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=229
Status	New
Detection Date	11/2/2026 2:53:27 PM

Method deleteUser at line 43 of mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/adminService.js includes the secret in Error in the error message. This may result in a secret leak.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/adminService.js	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/adminService.js

Line	13	43
Object	getUserId	Error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/adminService.js
Method _adminId() {

```
....
13.  return authService.getUserId();
```

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/adminService.js
Method async deleteUser(userId) {

```
....
43.  throw new Error(err.detail || "Failed to delete user");
```

Secret Leak in Error Messages\Path 3:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=230
Status	New
Detection Date	11/2/2026 2:53:27 PM

Method updateRole at line 84 of mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/adminService.js includes the secret in Error in the error message. This may result in a secret leak.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/adminService.js	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/adminService.js
Line	75	84
Object	userId	Error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/adminService.js
Method async updateRole(userId, role) {

```
....
75.
`${backend_url}/admin/users/${userId}/role?requester_id=${this._adminId(
)}`,
....
84.  throw new Error(err.detail || "Failed to update role");
```

Secret Leak in Error Messages\Path 4:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=231
Status	New
Detection Date	11/2/2026 2:53:27 PM

Method updateRole at line 84 of mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/adminService.js includes the secret in Error in the error message. This may result in a secret leak.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/adminService.js	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/adminService.js
Line	13	84
Object	getUserId	Error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/adminService.js

Method _adminId() {

```
....
13.  return authService.getUserId();
```

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/adminService.js

Method async updateRole(userId, role) {

```
....
84.  throw new Error(err.detail || "Failed to update role");
```

Secret Leak in Error Messages\Path 5:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=232
Status	New
Detection Date	11/2/2026 2:53:27 PM

Method getUsers at line 26 of mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/adminService.js includes the secret in Error in the error message. This may result in a secret leak.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-	mahindragto-nashik-chatbot-pq-

	5464a1e870d5/frontend/src/services/api/adminService.js	5464a1e870d5/frontend/src/services/api/adminService.js
Line	13	26
Object	getUserId	Error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/adminService.js
Method _adminId() {

```
....
13.  return authService.getUserId();
```

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/adminService.js
Method async getUsers() {

```
....
26.  throw new Error(err.detail || "Failed to fetch users");
```

Secret Leak in Error Messages\Path 6:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=233
Status	New
Detection Date	11/2/2026 2:53:27 PM

Method createUser at line 63 of mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/adminService.js includes the secret in Error in the error message. This may result in a secret leak.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/adminService.js	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/adminService.js
Line	13	63
Object	getUserId	Error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/adminService.js
Method _adminId() {

```
....
13.  return authService.getUserId();
```

File Name	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/adminService.js
Method	async createUser(userData) {

```
....
63.  throw new Error(err.detail || "Failed to create user");
```

Secret Leak in Error Messages\Path 7:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=234
Status	New
Detection Date	11/2/2026 2:53:27 PM

Method signup at line 33 of mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js includes the secret in Error in the error message. This may result in a secret leak.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js
Line	27	33
Object	password	Error

Code Snippet

File Name	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js
Method	async signup(username, firstName, lastName, email, password) {

```
....
27.  password,
....
33.  throw new Error(error.detail || "Signup failed");
```

Secret Leak in Error Messages\Path 8:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=235
Status	New
Detection Date	11/2/2026 2:53:27 PM

Method login at line 55 of mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js includes the secret in Error in the error message. This may result in a secret leak.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-	mahindragto-nashik-chatbot-pq-

	5464a1e870d5/frontend/src/services/api/authService.js	5464a1e870d5/frontend/src/services/api/authService.js
Line	50	55
Object	password	Error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js
Method async login(username, password) {

```
....
50.  body: JSON.stringify({ username, password }),
....
55.  throw new Error(error.detail || "Login failed");
```

Secret Leak in Error Messages\Path 9:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=236
Status	New
Detection Date	11/2/2026 2:53:27 PM

Method resetPassword at line 160 of mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js includes the secret in Error in the error message. This may result in a secret leak.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js
Line	156	160
Object	current_password	Error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js
Method async resetPassword(username, currentPassword, newPassword) {

```
....
156.  body: JSON.stringify({ username, current_password:
currentPassword, new_password: newPassword }),
....
160.  throw new Error(error.detail || "Password reset failed");
```

Secret Leak in Error Messages\Path 10:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pa

	thid=237
Status	New
Detection Date	11/2/2026 2:53:27 PM

Method resetPassword at line 160 of mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js includes the secret in Error in the error message. This may result in a secret leak.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js
Line	156	160
Object	new_password	Error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js
Method async resetPassword(username, currentPassword, newPassword) {

```
....
156.  body: JSON.stringify({ username, current_password:
currentPassword, new_password: newPassword }),
....
160.  throw new Error(error.detail || "Password reset failed");
```

Privacy Violation in Error Messages

Query Path:
JavaScript\Cx\JavaScript Low Visibility\Privacy Violation in Error Messages Version:1

Categories

CWE top 25: CWE top 25
MOIS(KISA) Secure Coding 2021: MOIS(KISA) Security Functions
OWASP ASVS: V08 Data Protection
OWASP Top 10 2021: A1-Broken Access Control
SANS top 25: SANS top 25
PCI DSS v4.0: PCI DSS (4.0) - 6.2.4 Vulnerabilities in software development

Description
Privacy Violation in Error Messages\Path 1:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=224
Status	New
Detection Date	11/2/2026 2:53:26 PM

Method signup at line 33 of mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js includes PII in Error in the error message. This may result in a Privacy Violation.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-	mahindragto-nashik-chatbot-pq-

	5464a1e870d5/frontend/src/services/api/authService.js	5464a1e870d5/frontend/src/services/api/authService.js
Line	26	33
Object	email	Error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js
Method async signup(username, firstName, lastName, email, password) {

```
....
26.  email,
....
33.  throw new Error(error.detail || "Signup failed");
```

Privacy Violation in Error Messages\Path 2:

Severity Low
Result State To Verify
Online Results https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=225
Status New
Detection Date 11/2/2026 2:53:26 PM

Method signup at line 33 of mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js includes PII in Error in the error message. This may result in a Privacy Violation.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js
Line	24	33
Object	firstName	Error

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js
Method async signup(username, firstName, lastName, email, password) {

```
....
24.  first_name: firstName,
....
33.  throw new Error(error.detail || "Signup failed");
```

Privacy Violation in Error Messages\Path 3:

Severity Low
Result State To Verify
Online Results https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=226

Status	New
Detection Date	11/2/2026 2:53:26 PM

Method signup at line 33 of mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js includes PII in Error in the error message. This may result in a Privacy Violation.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js
Line	25	33
Object	lastName	Error

Code Snippet

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/authService.js

Method async signup(username, firstName, lastName, email, password) {

```
....
25.  last_name: lastName,
....
33.  throw new Error(error.detail || "Signup failed");
```

Secret Leak in Logs

Query Path:
JavaScript\Cx\JavaScript Low Visibility\Secret Leak in Logs Version:1

Categories

CWE top 25: CWE top 25
MOIS(KISA) Secure Coding 2021: MOIS(KISA) Security Functions
OWASP ASVS: V08 Data Protection
OWASP Top 10 2021: A1-Broken Access Control
SANS top 25: SANS top 25
PCI DSS v4.0: PCI DSS (4.0) - 6.2.4 Vulnerabilities in software development

Description

Secret Leak in Logs\Path 1:

Severity	Low
Result State	To Verify
Online Results	https://checkmarx.mahindra-ad.com/CxWebClient/ViewerMain.aspx?scanid=1032952&projectid=13818&pathid=238
Status	New
Detection Date	11/2/2026 2:53:27 PM

Method console.log at line 34 of mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/config.js leaks the secret log to the log.

	Source	Destination
File	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/config.js	mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/config.js

Line	40	34
Object	userId	log

Code Snippet
File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/config.js
Method userId: CURRENT_USER_ID,

```
....
40.  userId: CURRENT_USER_ID,
```

File Name mahindragto-nashik-chatbot-pq-5464a1e870d5/frontend/src/services/api/config.js
Method console.log("□ Frontend Configuration:", {

```
....
34.  console.log("□ Frontend Configuration:", {
```

Command Injection

Risk

What might happen

An attacker could run arbitrary system-level OS commands on the application server host. Depending on the application's OS permissions, these could include:

- File actions (read / create / modify / delete)
- Open a network connection to the attacker's server
- Start and stop system services
- Modify the running application
- Complete server takeover

Cause

How does it happen

The application runs an OS system-level command to complete it's task, rather than via the application code. The command includes untrusted data, that may be controllable by an attacker. This untrusted string may contain malicious system-level commands engineered by an attacker, which could be executed as though the attacker were running commands directly on the application server.
In this case, the application receives data from the user input, and passes it as a string to the Operating System. This unvalidated data is then executed by the OS as a system command, running with the same system privileges as the application.

General Recommendations

How to avoid it

- Refactor the code to avoid any direct shell command execution. Instead, use platform provided APIs or library calls.
- If it is impossible to remove the command execution, execute only static commands that do not include dynamic, user-controlled data.
- Validate all input, regardless of source. Validation should be based on a whitelist: accept only data fitting a specified format, rather than rejecting bad patterns (blacklist). Parameters should be limited to an allowed character set, and non-validated input should be dropped. In addition to characters, check for:
    - Data type

  - Size
  - Range
  - Format
  - Expected values
- In order to minimize damage as a measure of defense in depth, configure the application to run using a restricted user account that has no unnecessary OS privileges.
- If possible, isolate all OS commands to use a separate dedicated user account that has minimal privileges only for the specific commands and files used by the application, according to the Principle of Least Privilege.
- If absolutely necessary to call a system command or execute an external program with user input, do not use unsafe methods that call the system shell, such as `os.system()` or `popen2.popen4()`.
- Instead, use safer methods such as `subprocess.run()`, with the `shell` parameter set to `False`.
- Always pass the user input as the 2nd element in the `args` list, with the first element in the list set to a hard-coded (or application-controlled) system command or program path.
- Do not pass the user argument as a string parameter, or as the first element in the `args` list.

Source Code Examples

Python
Execute System (Shell) Command With User Input

```
@app.route('/execute')
def execute_user_command_unsafe():
    user_command = request.args.get('command')

      output = os.system(user_command)

      return output
```

Call External Program with Safe Parameters

```
@app.route('/execute')
def execute_command_with_user_argument_safe():
    user_param = request.args.get('Parameter')
      user_param = shlex.quote(user_param)

      proc = subprocess.run( [PATH_TO_EXTERNAL_PROGRAM, user_param], shell=False)

      return proc.returncode
```

Refactor Code to Call Method in External Package

```
@app.route('/execute')
def perform_specific_action_package_api():
    user_param = request.args.get('Parameter')

      api = OpenSysLibrary()
      output = api.specific_action(user_param)

      return output
```

Client HTML5 Store Sensitive data In Web Storage

Risk

What might happen

An attacker that has access to a user's client device, will be able to retrieve stored information, such as user's sensitive personal data (PII) from the client storage. Use of this storage will also increase exposure of its content to theft via other means, such as cross-site scripting (XSS). This would be detrimental to the user and harm their privacy, and could cause damage to reputation, financial loss, and even lead to identity theft.

Cause

How does it happen

The application stores data, which may contain PII (Personally Identifiable Information), on the client browser or device. The application uses insecure forms of storage, which do not inherently provide any protection from unauthorized access. This data is not encrypted or sanitized before being stored, thus a malicious entity with access to the device or browser could easily retrieve the user's data.

General Recommendations

How to avoid it

- Avoid storing sensitive data, such as PII, on unprotected clients.
- If PII or other sensitive data must be stored on the client, ensure it is encrypted or otherwise protected.

Source Code Examples

JavaScript

User Data Stored in Local Storage

```
function storeUserData() {
      var accountId = getUserAccount();
      localStorage.setItem('accountId', accountId);
}
```

User Data in Globals instead of Persistent Storage

```
var globalAccountId;

function storeUserData() {
      var accountId = getUserAccount();
      globalAccountId = accountId; // Data is stored in DOM, but not persistently
}
```

Missing HSTS Header

Risk

What might happen

Failure to set an HSTS header and provide it with a reasonable "max-age" value of at least one year may leave users vulnerable to Man-in-the-Middle attacks.

Cause

How does it happen

Many users browse to websites by simply typing the domain name into the address bar, without the protocol prefix. The browser will automatically assume that the user's intended protocol is HTTP, instead of the encrypted HTTPS protocol.

When this initial request is made, an attacker can perform a Man-in-the-Middle attack and manipulate it to redirect users to a malicious web-site of the attacker's choosing. To protect the user from such an occurence, the HTTP Strict Transport Security (HSTS) header instructs the user's browser to disallow use of an unsecure HTTP connection to the the domain associated with the HSTS header.

Once a browser that supports the HSTS feature has visited a web-site and the header was set, it will no longer allow communicating with the domain over an HTTP connection.

Once an HSTS header was issued for a specific website, the browser is also instructed to prevent users from manually overriding and accepting an untrusted SSL certificate for as long as the "max-age" value still applies. The recommended "max-age" value is for at least one year in seconds, or 31536000.

General Recommendations

How to avoid it

- Before setting the HSTS header - consider the implications it may have:
  - Forcing HTTPS will prevent any future use of HTTP, which could hinder some testing
  - Disabling HSTS is not trivial, as once it is disabled on the site, it must also be disabled on the browser
- Set the HSTS header either explicitly within application code, or using web-server configurations.
- Ensure the "max-age" value for HSTS headers is set to 31536000 to ensure HSTS is strictly enforced for at least one year.
- Include the "includeSubDomains" to maximize HSTS coverage, and ensure HSTS is enforced on all sub-domains under the current domain
  - Note that this may prevent secure browser access to any sub-domains that utilize HTTP; however, use of HTTP is very severe and highly discouraged, even for websites that do not contain any sensitive information, as their contents can still be tampered via Man-in-the-Middle attacks to phish users under the HTTP domain.
- Once HSTS has been enforced, submit the web-application's address to an HSTS preload list - this will ensure that, even if a client is accessing the web-application for the first time (implying HSTS has not yet been set by the web-application), a browser that respects the HSTS preload list would still treat the web-application as if it had already issued an HSTS header. Note that this requires the server to have a trusted SSL certificate, and issue an HSTS header with a maxAge of 1 year (31536000)
- Note that this query is designed to return one result per application. This means that if more than one vulnerable response without an HSTS header is identified, only the first identified instance of this issue will be highlighted as a result. If a misconfigured instance of HSTS is identified (has a short lifespan, or is missing the "includeSubDomains" flag), that result will be flagged. Since HSTS is required to be enforced across the entire application to be considered a secure deployment of HSTS functionality, fixing this issue only where the query highlights this result is likely to produce subsequent results in other sections of the application; therefore, when adding this header via code, ensure it is uniformly deployed across the entire application. If this header is added via configuration, ensure that this configuration applies to the entire application.
- Note that misconfigured HSTS headers that do not contain the recommended max-age value of at least one year or the "includeSubDomains" flag will still return a result for a missing HSTS header.

Source Code Examples

JavaScript
Using Helmet with Express

```
var express = require('express')
var helmet = require('helmet') // Helmet includes HSTS, defined to one year and with
"includeSubDomains", as a built-in header

var app = express()
app.use(helmet())
```

Using Explicit HSTS Package - Built into Helmet, So Either 'HSTS' or 'Helmet' Can Be Used

```
var hsts = require('hsts')

app.use(hsts({
  maxAge: 31536000,
  includeSubDomains: true // Also enabled by default
}))
```

Explicitly Setting HSTS Header in Code

```
res.setHeader("Strict-Transport-Security", "max-age=31536000; includeSubDomains");
```

Use Of Hardcoded Password

Risk

What might happen

Hardcoded passwords expose the application to password leakage. If an attacker gains access to the source code, she will be able to steal the embedded passwords, and use them to impersonate a valid user. This could include impersonating end users to the application, or impersonating the application to a remote system, such as a database or a remote web service.

Once the attacker succeeds in impersonating the user or application, she will have full access to the system, and be able to do anything the impersonated identity could do.

Cause

How does it happen

The application codebase has string literal passwords embedded in the source code. This hardcoded value is used either to compare to user-provided credentials, or to authenticate downstream to a remote system (such as a database or a remote web service).

An attacker only needs to gain access to the source code to reveal the hardcoded password. Likewise, the attacker can reverse engineer the compiled application binaries, and easily retrieve the embedded password. Once found, the attacker can easily use the password in impersonation attacks, either directly on the application or to the remote system.

Furthermore, once stolen, this password cannot be easily changed to prevent further misuse, unless a new version of the application is compiled. Moreover, if this application is distributed to numerous systems, stealing the password from one system automatically allows a class break in to all the deployed systems.

General Recommendations

How to avoid it

- Do not hardcode any secret data in source code, especially not passwords.
- In particular, user passwords should be stored in a database or directory service, and protected with a strong password hash (e.g. bcrypt, scrypt, PBKDF2, or Argon2). Do not compare user passwords with a hardcoded value.
- Sytem passwords should be stored in a configuration file or the database, and protected with strong encryption (e.g. AES-256). Encryption keys should be securely managed, and not hardcoded.

Source Code Examples

Java

Hardcoded Admin Password

```
bool isAdmin(String username, String password) {
    bool isMatch = false;

    if (username.equals("admin")) {
        if (password.equals("P@ssw0rd"))
            return isMatch = true;
    }

    return isMatch;
}
```

No Hardcoded Credentials

```
bool isAdmin(String username, String password) {
    bool adminPrivs = false;

    if (authenticateUser(username, password)) {
        UserPrivileges privs = getUserPrivileges(username);

        if (privs.isAdmin)
            adminPrivs = true;
    }

    return adminPrivs;
}
```

Insecure Storage of Sensitive Data

Risk

What might happen

It is possible that an attacker may, at some point, succeed in accessing the server. When doing so, the attacker may be able to read the server's memory, database, and such. Any sensitive information would then be revealed to the attacker, including users' personal details. This includes their account information, financial data, SSN, and more. Using this information, the attacker may be able to perform identity theft, or simply misuse the victims' private data.

Cause

How does it happen

The application stores sensitive, personal information, such as PII, in user sessions or the application database. This data is stored in plaintext, without encryption, allowing anyone with read access to the server to steal these secrets.

General Recommendations

How to avoid it

- Do not store personal data or other secrets in plain text, without encryption. This applies both to long-term storage such as a database, and even mid-term memory such as server-side sessions.
- Sensitive data should always be stored in an encrypted manner, using modern encryption algorithms (e.g. AES) and a sufficiently long encryption key (e.g. 256 bits). Encryption keys must also be protected.
- Alternatively, some types of data should not be stored in a reversible format at all, and can be hashed using a cryptographically strong hash algorithm, such as SHA-256.

Source Code Examples

JavaScript

Hardcoded Session Token Secret using Express

```
var express = require('express');
var app = express();

app.use(express.cookieParser());
app.use(express.session({secret: '0123456789ABCDEF'}));
```

Protect Session Token in Config File using Express

```
var express = require('express');
var app = express();

app.use(express.cookieParser());

var token = decryptTokenFromConfigFile();

app.use(express.session({ secret: token,
                          cookie: {httpOnly: true,
                                   secure: true,
                                   maxAge: 1200000},
                          saveUninitialized: false
```

```
                        }));
```

PII Stored in Session Unencrypted with SessionJS

```
var http = require('http');
var session = require('./lib/core').session;
var querystring = require('querystring');

http.createServer(function (request, response) {
    session(request, response, function(request, response){
        var params = querystring.parse(request.url);
        var accountId = params.accountId;

        // Store the user's account details unencrypted
        request.session.data.accountId = accountId;
    });
}).listen(8080);
```

Encrypting PII before Storing with SessionJS

```
var http = require('http');
var session = require('./lib/core').session;
var querystring = require('querystring');

var crypto = require("crypto-js");

http.createServer(function (request, response) {
    session(request, response, function(request, response){
        var params = querystring.parse(request.url);
        var accountId = encrypt(params.accountId);

        // Always encrypt sensitive and personal data
        //   before storing it in long term memory or storage
        var encrypted = crypto.AES.encrypt(accountId, getEncKeyFromConfig());
        request.session.data.accountId = encrypted;
    });
}).listen(8080);
```

Filtering Sensitive Logs

Risk

What might happen

Exposing sensitive details about users or their activity could enable a privileged attacker to impersonate a user, or violate their privacy by tracking their actions in the application.

Cause

How does it happen

The application logs sensitive user data retrieved from the user's session, such as the user's session identifier, and writes this directly to the logging mechanism.
This logging mechanism is used throughout the application to track user activity or history, and may be exposed or used during regular service requests.

General Recommendations

How to avoid it

- Do not write sensitive or private data to the standard logging mechanism, without properly sanitizing or encrypting first.
- In some situations, it may be best to refrain from logging the session Id. Instead, consider logging a salted hash of the session Id instead, so as to enable session correlation without leaking sensitive user data.

Source Code Examples

Python
User Password Is Logged In Plain Text

```
@app.route('/login', methods=['POST'])
def login():
    user = request.form.get('username')
    pwd = request.form.get('pwd')
    if doLogin(user, pwd):
        app.logger.info('%s logged in successfully with password: %s' % (user, pwd))
        return render_template('index.html', user)
    else:
        app.logger.info('%s failed to log in with password: %s' % (user, pwd))
        return 'Failed to log in'
```

Information Exposure Through an Error Message

Risk

What might happen

Exposed details about the application's environment, users, or associated data (for example, stack trace) could enable an attacker to find another flaw and help the attacker to mount an attack. This may also leak sensitive data, e.g. passwords or database fields.

Cause

How does it happen

The application handles exceptions in an insecure manner, including raw details directly in the error message. This could occur in various ways: by not handling the exception; printing it directly to the output or file; explicitly returning the exception object; or by configuration. These exception details may include sensitive information that could leak to the users due to the occurrence of the runtime error.

General Recommendations

How to avoid it

- Do not expose exception data directly to the output or users, instead return an informative, generic error message. Log the exception details to a dedicated log mechanism.
- Any method that could throw an exception should be wrapped in an exception handling block that:
  - Explicitly handles expected exceptions.
  - Includes a default solution to explicitly handle unexpected exceptions.
- Configure a global handler to prevent unhandled errors from leaving the application.

Source Code Examples

Privacy Violation in Error Messages

Risk

What might happen

PII (Personal Identifiable Information) is a loosely defined set of data that can potentially be used to directly identify an individual (e.g. a passport number, e-mail address, phone number) or indirectly via a narrow proximity of an individual (e.g. date of birth, gender and city of residence). The broader definition of PII also includes health-related information, protected legal records and more. Exposure of this information can cause great harm to individuals, as it can be used to perform identity theft and impersonation, as well as extortion and personal harm. PII is enforced in various ways and has no single global standard, but protection of PII is strictly enforced by regulations such as GDPR, CCPA, The U.S. Privacy Act and more. PII data must be protected in transit, exposed as little as possible, and rarely shared with any external entity, except for its intended owner.

Cause

How does it happen

The application includes the PII data in an error message that is not properly handled. Unhandled error messages are often written to logs, exposed in outputs such as terminals which are observed by management software (hypervisors, dockers), and reflected to users in error messages.

General Recommendations

How to avoid it

1. Encrypt PII in transit and at rest
2. Avoid exposing PII when it's not intended, e.g., in logs, URLs, or error messages
3. Demonstrate only partial data in an unauthenticated context, e.g., mask the data and show only several initial and trailing characters
4. Refrain from sending PII to remote servers without justified business requirements and applying proper encryption
5. Refrain from writing PII to the body of errors

Source Code Examples

JavaScript

Throwing an Exception with Sensitive PII in Message

```
app.post('profile/ssn/update', (req, res) => {
    const { ssn } = req.body;
    const user = getCurrentUser(req);
    if (validateSSN(ssn)) {
        throw new Error(`${user.id} - Invalid SSN or SSN already in use - ${ssn}`);
        // Handle error
    }
    // Continue
}
```

Throwing an Exception without Any Sensitive PII in the Error Message

```
app.post('profile/ssn/update', (req, res) => {
    const { ssn } = req.body;
    const user = getCurrentUser(req);
```

```
    if (validateSSN(ssn)) {
        throw new Error(`${user.id} - Invalid SSN or SSN already in use.`);
        // Handle error
    }
    // Continue
}
```

Secret Leak in Error Messages

Risk

What might happen

Secrets are a variety of values that may provide access to data or functionality, and should be protected at all times when used. Secrets come in many forms - passwords, API keys, encryption keys, session tokens and more. Exposing a secret to anyone would allow them dangerous access to any and all resources these secrets protect. An attacker may obtain a leaked secret, which provides them with access to accounts, services, or confidential data.

Cause

How does it happen

The application includes sensitive secret data in an error message that is not properly handled. Unhandled error messages are often written to logs, exposed in outputs such as terminals which are observed by management software (hypervisors, dockers), and reflected to users in error messages.

General Recommendations

How to avoid it

1. Encrypt secrets in transit and at rest
2. Use dedicated secret storage software or hardware
3. Refrain from exposing secrets anywhere without justified business requirements
4. Refrain from writing secrets to the body of errors

Source Code Examples

JavaScript

Writing Passwords to An Error Message

```
app.post('profile/password/update', (req, res) => {
    const { password } = req.body;
    const user = getCurrentUser(req);
    if (validatePasswordHistory(user, password) {
        throw new Error(`${user.name} attempted to reuse old password ${password}`);
    }
    // Continue
}
```

Writing a Password Error Message without Writing The Password

```
app.post('profile/password/update', (req, res) => {
    const { password } = req.body;
    const user = getCurrentUser(req);
    if (validatePasswordHistory(user, password) {
        throw new Error(`${user.name} attempted to reuse old password!`);
    }
    // Continue
}
```

Secret Leak in Logs

Risk

What might happen

Secrets are a variety of values that may provide access to data or functionality, and should be protected at all times when used. Secrets come in many forms - passwords, API keys, encryption keys, session tokens and more. Exposing a secret to anyone would allow them dangerous access to any and all resources these secrets protect. An attacker may obtain a leaked secret, which provides them with access to accounts, services, or confidential data.

Cause

How does it happen

The application writes the secret into a log file in clear text. In the case the logs are not encrypted, periodically purged, and access to them is not appropriately restricted, this secret may be exposed.

General Recommendations

How to avoid it

1. Encrypt secrets in transit and at rest
2. Use dedicated secret storage software or hardware
3. Refrain from exposing secrets anywhere without justified business requirements
4. Avoid logging sensitive data of any sort - if required, consider masking the data such that it is not usable, but can help in understanding errors

---

Source Code Examples

JavaScript

Writing Passwords to Log

```
app.post('profile/password/update', (req, res) => {
    const { password } = req.body;
    const user = getCurrentUser(req);
    if (validatePasswordHistory(user, password) {
        logger.warn(`${user.name} attempted to reuse old password ${password}`);
        // Handle rejection
    }
    // Continue
}
```

Logging Password Error without Logging The Password

```
app.post('profile/password/update', (req, res) => {
    const { password } = req.body;
    const user = getCurrentUser(req);
    if (validatePasswordHistory(user, password) {
        logger.warn(`${user.name} attempted to reuse old password!`);
        // Handle rejection
    }
    // Continue
}
```

Scanned Languages

Language	Hash Number	Change Date
JavaScript	2103811659559524	11/12/2025
VbScript	0742915089703437	11/12/2025
Python	0902023474167420	11/12/2025
Common	2250261308531610	11/12/2025