


EXP 16:

Code :

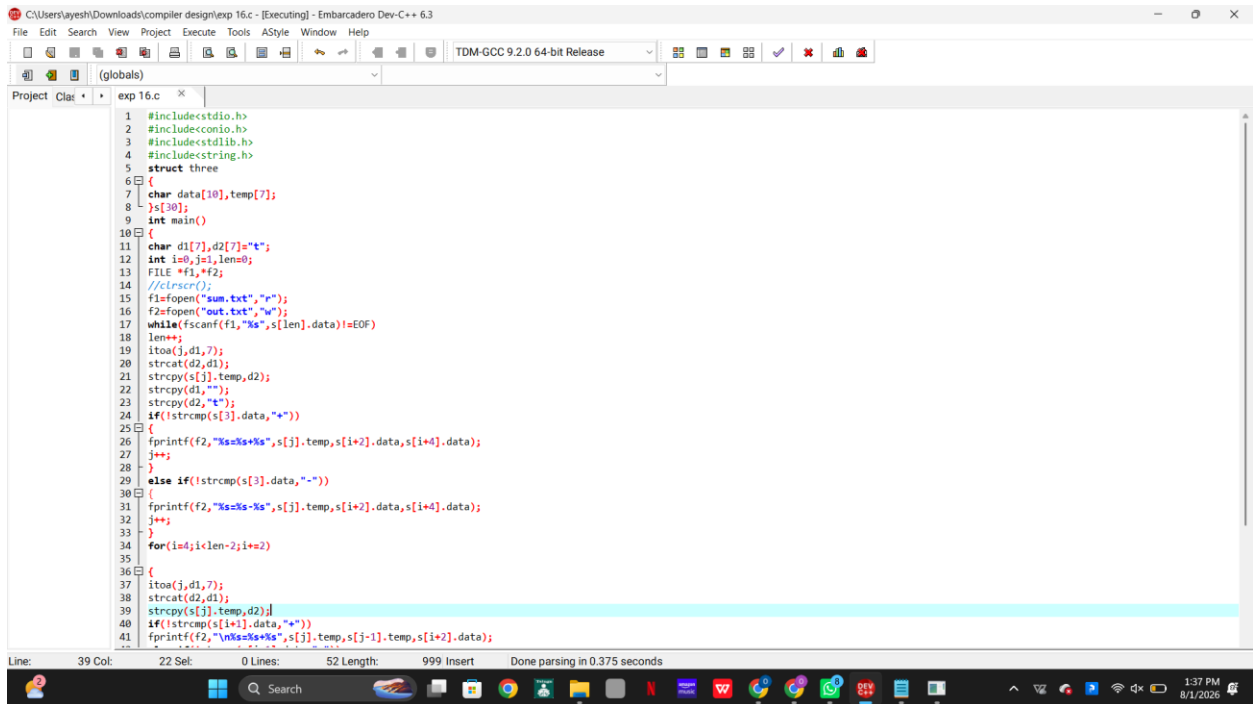

```
1 #include<stdio.h>
2 #include<conio.h>
3 #include<stdlib.h>
4 #include<string.h>
5 struct three
6 {
7     char data[10],temp[7];
8     int s[30];
9 }
10 int main()
11 {
12     char d1[7],d2[7]="t";
13     int i=0,j=1,len=0;
14     FILE *f1,*f2;
15     //clrscr();
16     f1=fopen("sum.txt","r");
17     f2=fopen("out.txt","w");
18     while(fscanf(f1,"%s",s[len].data)!=EOF)
19     {
20         len++;
21         itoa(j,d1,7);
22         strcat(d2,d1);
23         strcpy(s[j].temp,d2);
24         strcpy(d1,"");
25         strcpy(d2,"t");
26         strcpy(s[j+1].data,"")
27     }
28     if(!strcmp(s[3].data,"+"))
29     {
30         fprintf(f2,"%s%s+%s",s[j].temp,s[i+2].data,s[i+4].data);
31         j++;
32     }
33     else if(!strcmp(s[3].data,"-"))
34     {
35         fprintf(f2,"%s%s-%s",s[j].temp,s[i+2].data,s[i+4].data);
36         j++;
37     }
38     for(i=4;i<len-2;i+=2)
39     {
40         itoa(j,d1,7);
41         strcat(d2,d1);
42         strcpy(s[j].temp,d2);
43         if(!strcmp(s[i+1].data,"+"))
44             fprintf(f2,"%s%s+%s",s[j].temp,s[j+1].temp,s[i+2].data);
45         else if(!strcmp(s[i+1].data,"-"))
46             fprintf(f2,"%s%s-%s",s[j].temp,s[j+1].temp,s[i+2].data);
47     }
48 }
```

Output:



```
t1=b+c
t2=t1-d
t3=t2+e
a=t3
```