

CODE


```
%{
#include <stdio.h>
%}

/* Basic regex for email: username@domain.extension */
%%
[a-zA-Z0-9._]+@[a-zA-Z0-9]+\.(com|in|org|net)    { printf("It is a
valid email: %s\n", yytext); }
.+                                             { printf("It is not
valid: %s\n", yytext); }
%%

int yywrap() { return 1; }

int main() {
    printf("Enter the email: ");
    yylex();    // takes input directly from keyboard
    return 0;
}
```

SCREENSHOT

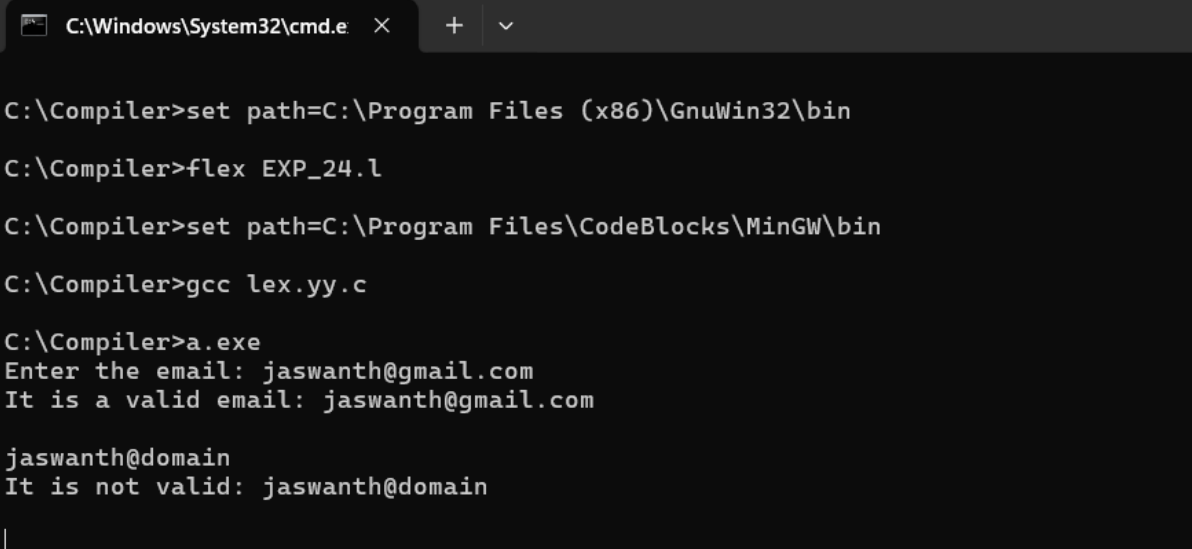

```
C:\Windows\System32\cmd.e  X  +  v

C:\Compiler>set path=C:\Program Files (x86)\GnuWin32\bin
C:\Compiler>flex EXP_24.l
C:\Compiler>set path=C:\Program Files\CodeBlocks\MinGW\bin
C:\Compiler>gcc lex.yy.c
C:\Compiler>a.exe
Enter the email: jaswanth@gmail.com
It is a valid email: jaswanth@gmail.com

jaswanth@domain
It is not valid: jaswanth@domain
```