



Fast API -2520090235 – skill5-DBSE


Fast API IN VS CODE

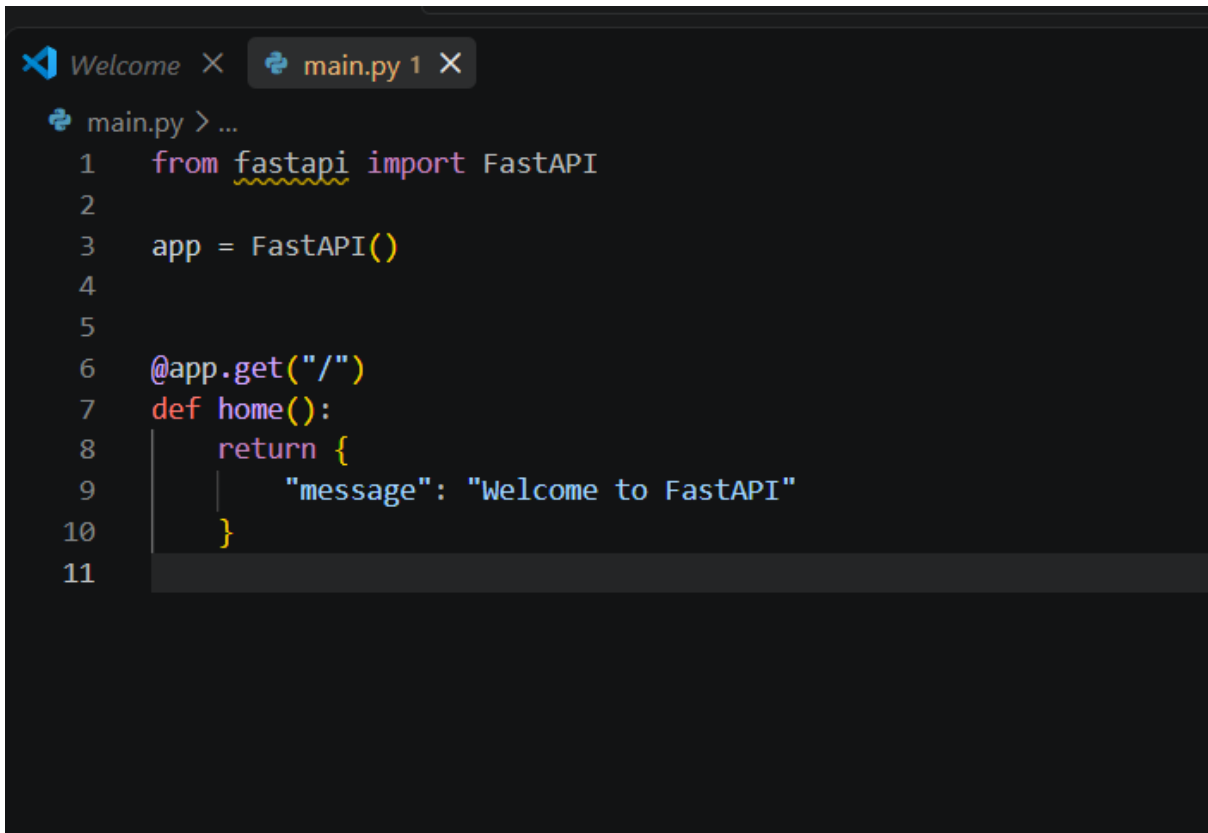

```
main.py > ...
1  from fastapi import FastAPI
2
3  app = FastAPI()
4
5
6  @app.get("/")
7  def home():
8      return {
9          "message": "Welcome to FastAPI"
10     }
11
```

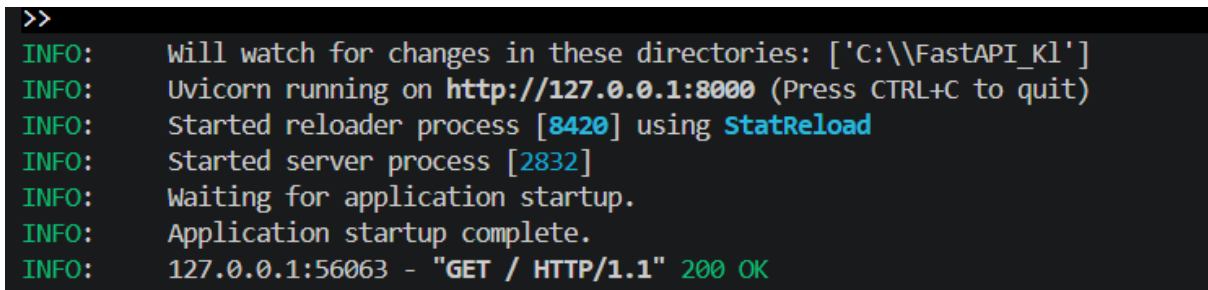

```
>>
INFO:     Will watch for changes in these directories: ['C:\\FastAPI_K1']
INFO:     Uvicorn running on http://127.0.0.1:8000 (Press CTRL+C to quit)
INFO:     Started reloader process [8420] using StatReload
INFO:     Started server process [2832]
INFO:     Waiting for application startup.
INFO:     Application startup complete.
INFO:     127.0.0.1:56063 - "GET / HTTP/1.1" 200 OK
```

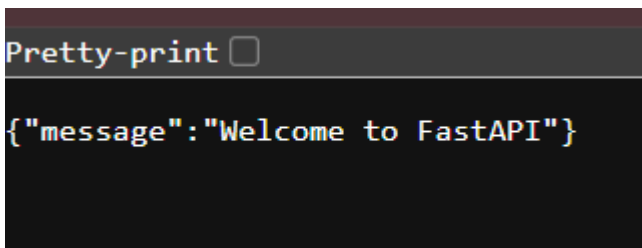

```
Pretty-print ☐

{"message": "Welcome to FastAPI"}
```

Fast API connection (get and post)

```
FastAPI_KI 1
Welcome X main.py X FastAPI - Swagger UI X
main.py > create_student
1 from fastapi import FastAPI
2 from sqlalchemy import create_engine, text
3 from pydantic import BaseModel
4 app = FastAPI()
5 DATABASE_URL = "mysql+pymysql://root:9rohita@localhost/university"
6 engine = create_engine(DATABASE_URL)
7 class Student(BaseModel):
8     id: int
9     name: str
10    department: str
11 @app.get("/students")
12 def get_students():
13     with engine.connect() as connection:
14         result = connection.execute(
15             text("SELECT * FROM students")
16         )
17         students = result.mappings().all()
18         return students
19 @app.post("/students")
20 def create_student(student: Student):
21     with engine.begin() as connection:
22         connection.execute(
```

```
        connection.execute(
            text("""
                INSERT INTO students (id, name, department)
                VALUES (:id, :name, :department)
            """),
            {
                "id": student.id,
                "name": student.name,
                "department": student.department
            }
        )

    return {
        "message": "Student created",
        "student": student
    }
```

Swagger UI

FastAPI 0.1.0 OAS 3.1
/openapi.json

default

GET /students Get Students

Parameters

Cancel

No parameters

Execute

Clear

Responses

Curl

```
curl -X 'GET' \
  'http://127.0.0.1:8000/students' \
  -H 'accept: */*'
```

Request URL

http://127.0.0.1:8000/students

Server response

POST

/students Create Student

Parameters

Cancel

Reset

No parameters

Request body required

application/json

Edit Value | Schema

```
{
  "id": 103,
  "name": "Arun",
  "department": "CSIT"
}
```

Curl

```
curl -X 'POST' \
  'http://127.0.0.1:8000/students' \
  -H 'accept: */*' \
  -H 'Content-Type: application/json' \
  -d '{
    "id": 103,
    "name": "Arun",
    "department": "CSIT"
  }'
```

Request URL

http://127.0.0.1:8000/students

Server response

Code Details

200

Response body

```
{
  "message": "Student created",
  "student": {
    "id": 103,
    "name": "Arun",
    "department": "CSIT"
  }
}
```



Download

Response headers

```
content-length: 84
content-type: application/json
date: Fri, 18 Sep 2026 14:35:03 GMT
server: uvicorn
```

MySQL Workbench

Rohita_2520090235

File Edit View Query Database Server Tools Scripting Help

Navigator: Query 1

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Administration
- Schemas

Information

No object selected

Query 1

```
3 CREATE TABLE students (
4   id INT PRIMARY KEY,
5   name VARCHAR(100),
6   department VARCHAR(100)
7 );
8 SELECT * FROM students;
9 INSERT INTO students (id, name, department)
10 VALUES
11 (101, 'Ravi', 'CSE'),
12 (102, 'Priya', 'ECE');
13 SELECT * FROM students;
```

Result Grid

	id	name	department
▶	101	Ravi	CSE
	102	Priya	ECE
	103	Arun	CSIT
*	NULL	NULL	NULL

students 3 x