

# DonorsChoose

DonorsChoose.org receives hundreds of thousands of project proposals each year for classroom projects in need of funding. Right now, a large number of volunteers is needed to manually screen each submission before it's approved to be posted on the DonorsChoose.org website.

Next year, DonorsChoose.org expects to receive close to 500,000 project proposals. As a result, there are three main problems they need to solve:

- How to scale current manual processes and resources to screen 500,000 projects so that they can be posted as quickly and as efficiently as possible
- How to increase the consistency of project vetting across different volunteers to improve the experience for teachers
- How to focus volunteer time on the applications that need the most assistance

The goal of the competition is to predict whether or not a DonorsChoose.org project proposal submitted by a teacher will be approved, using the text of project descriptions as well as additional metadata about the project, teacher, and school. DonorsChoose.org can then use this information to identify projects most likely to need further review before approval.

## About the DonorsChoose Data Set

The `train.csv` data set provided by DonorsChoose contains the following features:

Feature	Description
<code>project_id</code>	A unique identifier for the proposed project. <b>Example:</b> p036502
<code>project_title</code>	Title of the project. <b>Examples:</b> Art Will Make You Happy! First Grade Fun
<code>project_grade_category</code>	Grade level of students for which the project is targeted. One of the following enumerated values: Grades PreK-2 Grades 3-5 Grades 6-8 Grades 9-12
<code>project_subject_categories</code>	One or more (comma-separated) subject categories for the project from the following enumerated list of values: Applied Learning Care & Hunger Health & Sports History & Civics Literacy & Language Math & Science Music & The Arts Special Needs Warmth  <b>Examples:</b> Music & The Arts Literacy & Language, Math & Science
<code>school_state</code>	State where school is located ( <a href="#">Two-letter U.S. postal code</a> ). <b>Example:</b> WY
<code>project_subject_subcategories</code>	One or more (comma-separated) subject subcategories for the project. <b>Examples:</b> Literacy Literature & Writing, Social Sciences
<code>project_resource_summary</code>	An explanation of the resources needed for the project. <b>Example:</b> My students need hands on literacy materials to manage sensory needs!
<code>project_essay_1</code>	First application essay*
<code>project_essay_2</code>	Second application essay*
<code>project_essay_3</code>	Third application essay*

Feature	Description
project_essay_4	Fourth application essay
project_submitted_datetime	Datetime when project application was submitted. <b>Example:</b> 2016-04-28 12:43:56.245
teacher_id	A unique identifier for the teacher of the proposed project. <b>Example:</b> bdf8baa8fedef6bfeec7ae4ff1c15c56
teacher_prefix	Teacher's title. One of the following enumerated values: <ul style="list-style-type: none"> <li>nan</li> <li>Dr.</li> <li>Mr.</li> <li>Mrs.</li> <li>Ms.</li> <li>Teacher.</li> </ul>
teacher_number_of_previously_posted_projects	Number of project applications previously submitted by the same teacher. <b>Example:</b> 2

\* See the section **Notes on the Essay Data** for more details about these features.

Additionally, the `resources.csv` data set provides more data about the resources required for each project. Each line in this file represents a resource required by a project:

Feature	Description
id	A <code>project_id</code> value from the <code>train.csv</code> file. <b>Example:</b> p036502
description	Description of the resource. <b>Example:</b> Tenor Saxophone Reeds, Box of 25
quantity	Quantity of the resource required. <b>Example:</b> 3
price	Price of the resource required. <b>Example:</b> 9.95

**Note:** Many projects require multiple resources. The `id` value corresponds to a `project_id` in `train.csv`, so you use it as a key to retrieve all resources needed for a project:

The data set contains the following label (the value you will attempt to predict):

Label	Description
project_is_approved	A binary flag indicating whether DonorsChoose approved the project. A value of 0 indicates the project was not approved, and a value of 1 indicates the project was approved.

## Notes on the Essay Data

Prior to May 17, 2016, the prompts for the essays were as follows:

- `__project_essay_1__`: "Introduce us to your classroom"
- `__project_essay_2__`: "Tell us more about your students"
- `__project_essay_3__`: "Describe how your students will use the materials you're requesting"
- `__project_essay_3__`: "Close by sharing why your project will make a difference"

Starting on May 17, 2016, the number of essays was reduced from 4 to 2, and the prompts for the first 2 essays were changed to the following:

- `__project_essay_1__`: "Describe your students: What makes your students special? Specific details about their background, your neighborhood, and your school are all helpful."
- `__project_essay_2__`: "About your project: How will these materials make a difference in your students' learning and improve their school lives?"

For all projects with `project_submitted_datetime` of 2016-05-17 and later, the values of `project_essay_3` and `project_essay_4` will be NaN.

In [1]:

```
%matplotlib inline
import warnings
warnings.filterwarnings("ignore")

import sqlite3
import pandas as pd
import numpy as np
import nltk
import string
import matplotlib.pyplot as plt
```

```

import seaborn as sns
from sklearn.feature_extraction.text import TfidfTransformer
from sklearn.feature_extraction.text import TfidfVectorizer

from sklearn.feature_extraction.text import CountVectorizer
from sklearn.metrics import confusion_matrix
from sklearn import metrics
from sklearn.metrics import roc_curve, auc
from nltk.stem.porter import PorterStemmer

import re
# Tutorial about Python regular expressions: https://pymotw.com/2/re/
import string
from nltk.corpus import stopwords
from nltk.stem import PorterStemmer
from nltk.stem.wordnet import WordNetLemmatizer

from gensim.models import Word2Vec
from gensim.models import KeyedVectors
import pickle

from tqdm import tqdm
import os

from plotly import plotly
import plotly.offline as offline
import plotly.graph_objs as go
offline.init_notebook_mode()
from collections import Counter

```

## 1.1 Reading Data

In [2]:

```

project_data = pd.read_csv('train_data.csv')
resource_data = pd.read_csv('resources.csv')

```

In [3]:

```

print("Number of data points in train data", project_data.shape)
print('-'*50)
print("The attributes of data :", project_data.columns.values)

```

Number of data points in train data (109248, 17)

```

-----
The attributes of data : ['Unnamed: 0' 'id' 'teacher_id' 'teacher_prefix' 'school_state'
'project_submitted_datetime' 'project_grade_category'
'project_subject_categories' 'project_subject_subcategories'
'project_title' 'project_essay_1' 'project_essay_2' 'project_essay_3'
'project_essay_4' 'project_resource_summary'
'teacher_number_of_previously_posted_projects' 'project_is_approved']

```

In [4]:

```

# how to replace elements in list python: https://stackoverflow.com/a/2582163/4084039
cols = ['Date' if x=='project_submitted_datetime' else x for x in list(project_data.columns)]

#sort dataframe based on time pandas python: https://stackoverflow.com/a/49702492/4084039
project_data['Date'] = pd.to_datetime(project_data['project_submitted_datetime'])
project_data.drop('project_submitted_datetime', axis=1, inplace=True)
project_data.sort_values(by=['Date'], inplace=True)

# how to reorder columns pandas python: https://stackoverflow.com/a/13148611/4084039
project_data = project_data[cols]

project_data.head(2)

```

Out[4]:

Unnamed: 0	id	teacher_id	teacher_prefix	school_state	Date	project_grade_category	project_:
55660	8393 p205479	2bf07ba08945e5d8b2a3f269b2b3cfe5	Mrs.	CA	2016-04-27 00:27:36	Grades PreK-2	
76127	37728 p043609	3f60494c61921b3b43ab61bdde2904df	Ms.	UT	2016-04-27 00:31:25	Grades 3-5	

In [5]:

```
print("Number of data points in train data", resource_data.shape)
print(resource_data.columns.values)
resource_data.head(2)
```

Number of data points in train data (1541272, 4)  
['id' 'description' 'quantity' 'price']

Out [5]:

	id	description	quantity	price
0	p233245	LC652 - Lakeshore Double-Space Mobile Drying Rack	1	149.00
1	p069063	Bouncy Bands for Desks (Blue support pipes)	3	14.95

## 1.2 preprocessing of project\_subject\_categories

In [6]:

```
categories = list(project_data['project_subject_categories'].values)
# remove special characters from list of strings python:
https://stackoverflow.com/a/47301924/4084039

# https://www.geeksforgeeks.org/removing-stop-words-nltk-python/
# https://stackoverflow.com/questions/23669024/how-to-strip-a-specific-word-from-a-string
# https://stackoverflow.com/questions/8270092/remove-all-whitespace-in-a-string-in-python
cat_list = []
for i in categories:
    temp = ""
    # consider we have text like this "Math & Science, Warmth, Care & Hunger"
    for j in i.split(','): # it will split it in three parts ["Math & Science", "Warmth", "Care & Hunger"]
        if 'The' in j.split(): # this will split each of the category based on space "Math & Science" => "Math", "&", "Science"
            j = j.replace('The', '') # if we have the words "The" we are going to replace it with '' (i.e. removing 'The')
            j = j.replace(' ', '') # we are placing all the ' ' (space) with '' (empty) ex: "Math & Science" => "Math&Science"
            temp += j.strip() + " " # " abc ".strip() will return "abc", remove the trailing spaces
            temp = temp.replace('&', '_') # we are replacing the & value into
    cat_list.append(temp.strip())

project_data['clean_categories'] = cat_list
project_data.drop(['project_subject_categories'], axis=1, inplace=True)

from collections import Counter
my_counter = Counter()
for word in project_data['clean_categories'].values:
    my_counter.update(word.split())

cat_dict = dict(my_counter)
sorted_cat_dict = dict(sorted(cat_dict.items(), key=lambda kv: kv[1]))
```

## 1.3 preprocessing of project subject subcategories

In [7]:

```
sub_categories = list(project_data['project_subject_subcategories'].values)
# remove special characters from list of strings python:
https://stackoverflow.com/a/47301924/4084039

# https://www.geeksforgeeks.org/removing-stop-words-nltk-python/
# https://stackoverflow.com/questions/23669024/how-to-strip-a-specific-word-from-a-string
# https://stackoverflow.com/questions/8270092/remove-all-whitespace-in-a-string-in-python

sub_cat_list = []
for i in sub_categories:
    temp = ""
    # consider we have text like this "Math & Science, Warmth, Care & Hunger"
    for j in i.split(','): # it will split it in three parts ["Math & Science", "Warmth", "Care & Hunger"]
        if 'The' in j.split(): # this will split each of the category based on space "Math & Science" => "Math", "&", "Science"
            j = j.replace('The', '') # if we have the words "The" we are going to replace it with '' (i.e removing 'The')
            j = j.replace(' ', '') # we are placing all the ' ' (space) with '' (empty) ex: "Math & Science" => "Math&Science"
            temp += j.strip() + " #" + abc ".strip() will return "abc", remove the trailing spaces
            temp = temp.replace('&', '_')
        sub_cat_list.append(temp.strip())

project_data['clean_subcategories'] = sub_cat_list
project_data.drop(['project_subject_subcategories'], axis=1, inplace=True)

# count of all the words in corpus python: https://stackoverflow.com/a/22898595/4084039
my_counter = Counter()
for word in project_data['clean_subcategories'].values:
    my_counter.update(word.split())

sub_cat_dict = dict(my_counter)
sorted_sub_cat_dict = dict(sorted(sub_cat_dict.items(), key=lambda kv: kv[1]))
```

## 1.3 Text preprocessing

In [8]:

```
# merge two column text dataframe:
project_data["essay"] = project_data["project_essay_1"].map(str) + \
    project_data["project_essay_2"].map(str) + \
    project_data["project_essay_3"].map(str) + \
    project_data["project_essay_4"].map(str)
```

In [9]:

```
project_data.head(2)
```

Out [9]:

Unnamed: 0	id	teacher_id	teacher_prefix	school_state	Date	project_grade_category	project_title
55660	8393 p205479	2bf07ba08945e5d8b2a3f269b2b3cfe5	Mrs.	CA	2016-04-27 00:27:36	Grades PreK-2	Engineer STEAM the Print Classroom
76127	37728 p043609	3f60494c61921b3b43ab61bdde2904df	Ms.	UT	2016-04-27 00:31:25	Grades 3-5	Sensory Tools For

In [10]:

In [11]:

```
# printing some random reviews
print(project_data['essay'].values[0])
print("="*50)
print(project_data['essay'].values[150])
print("="*50)
print(project_data['essay'].values[1000])
print("="*50)
print(project_data['essay'].values[20000])
print("="*50)
print(project_data['essay'].values[99999])
print("="*50)
```

I have been fortunate enough to use the Fairy Tale STEM kits in my classroom as well as the STEM journals, which my students really enjoyed. I would love to implement more of the Lakeshore STEM kits in my classroom for the next school year as they provide excellent and engaging STEM lessons. My students come from a variety of backgrounds, including language and socioeconomic status. Many of them don't have a lot of experience in science and engineering and these kits give me the materials to provide these exciting opportunities for my students. Each month I try to do several science or STEM/STEAM projects. I would use the kits and robot to help guide my science instruction in engaging and meaningful ways. I can adapt the kits to my current language arts pacing guide where we already teach some of the material in the kits like tall tales (Paul Bunyan) or Johnny Appleseed. The following units will be taught in the next school year where I will implement these kits: magnets, motion, sink vs. float, robots. I often get to these units and don't know if I am teaching the right way or using the right materials. The kits will give me additional ideas, strategies, and lessons to prepare my students in science. It is challenging to develop high quality science activities. These kits give me the materials I need to provide my students with science activities that will go along with the curriculum in my classroom. Although I have some things (like magnets) in my classroom, I don't know how to use them effectively. The kits will provide me with the right amount of materials and show me how to use them in an appropriate way.

I teach high school English to students with learning and behavioral disabilities. My students all vary in their ability level. However, the ultimate goal is to increase all students literacy levels. This includes their reading, writing, and communication levels. I teach a really dynamic group of students. However, my students face a lot of challenges. My students all live in poverty and in a dangerous neighborhood. Despite these challenges, I have students who have the desire to defeat these challenges. My students all have learning disabilities and currently all are performing below grade level. My students are visual learners and will benefit from a classroom that fulfills their preferred learning style. The materials I am requesting will allow my students to be prepared for the classroom with the necessary supplies. Too often I am challenged with students who come to school unprepared for class due to economic challenges. I want my students to be able to focus on learning and not how they will be able to get school supplies. The supplies will last all year. Students will be able to complete written assignments and maintain a classroom journal. The chart paper will be used to make learning more visual in class and to create posters to aid students in their learning. The students have access to a classroom printer. The toner will be used to print student work that is completed on the classroom Chromebooks. I want to try and remove all barriers for the students learning and create opportunities for learning. One of the biggest barriers is the students not having the resources to get pens, paper, and folders. My students will be able to increase their literacy skills because of this project.

"Life moves pretty fast. If you don't stop and look around once in awhile, you could miss it.\" from the movie, Ferris Bueller's Day Off. Think back...what do you remember about your grandparents? How amazing would it be to be able to flip through a book to see a day in their lives? My second graders are voracious readers! They love to read both fiction and nonfiction books. Their favorite characters include Pete the Cat, Fly Guy, Piggie and Elephant, and Mercy Watson. They also love to read about insects, space and plants. My students are hungry bookworms! My students are eager to learn and read about the world around them. My kids love to be at school and are like little sponges absorbing everything around them. Their parents work long hours and usually do not see their children. My students are usually cared for by their grandparents or a family friend. Most of my students do not have someone who speaks English at home. Thus it is difficult for my students to acquire language. Now think forward... wouldn't it mean a lot to your kids, nieces or nephews or grandchildren, to be able to see a day in your life today 30 years from now? Memories are so precious to us and being able to share these memories with future generations will be a rewarding experience. As part of our social studies curriculum, students will be learning about changes over time. Students will be studying photos to learn about how their community has changed over time. In particular, we will look at photos to study how the land, buildings, clothing, and schools have changed over time. As a culminating activity, my students will capture a slice of their history and preserve it through scrap booking. Key important events in their young lives will be documented with the date, location, and names. Students will be using photos from home and from school to create their second grade memories. Their scrap books will preserve their unique stories for future generations to enjoy. Your donation to this project will provide my

second graders with an opportunity to learn about social studies in a fun and creative manner. Through their scrapbooks, children will share their story with others and have a historical document for the rest of their lives.

=====

"A person's a person, no matter how small." (Dr. Seuss) I teach the smallest students with the biggest enthusiasm for learning. My students learn in many different ways using all of our senses and multiple intelligences. I use a wide range of techniques to help all my students succeed. \r\nStudents in my class come from a variety of different backgrounds which makes for wonderful sharing of experiences and cultures, including Native Americans.\r\nOur school is a caring community of successful learners which can be seen through collaborative student project based learning in and out of the classroom. Kindergarteners in my class love to work with hands-on materials and have many different opportunities to practice a skill before it is mastered. Having the social skills to work cooperatively with friends is a crucial aspect of the kindergarten curriculum. Montana is the perfect place to learn about agriculture and nutrition. My students love to role play in our pretend kitchen in the early childhood classroom. I have had several kids ask me, "Can we try cooking with REAL food?" I will take their idea and create "Common Core Cooking Lessons" where we learn important math and writing concepts while cooking delicious healthy food for snack time. My students will have a grounded appreciation for the work that went into making the food and knowledge of where the ingredients came from as well as how it's healthy for their bodies. This project would expand our learning of nutrition and agricultural cooking recipes by having us peel our own apples to make homemade applesauce, make our own bread, and mix up healthy plants from our classroom garden in the spring. We will also create our own cookbooks to be printed and shared with families. \r\nStudents will gain math and literature skills as well as a life long enjoyment for healthy cooking.nannan

=====

My classroom consists of twenty-two amazing sixth graders from different cultures and backgrounds. They are a social bunch who enjoy working in partners and working with groups. They are hard-working and eager to head to middle school next year. My job is to get them ready to make this transition and make it as smooth as possible. In order to do this, my students need to come to school every day and feel safe and ready to learn. Because they are getting ready to head to middle school, I give them lots of choice- choice on where to sit and work, the order to complete assignments, choice of projects, etc. Part of the students feeling safe is the ability for them to come into a welcoming, encouraging environment. My room is colorful and the atmosphere is casual. I want them to take ownership of the classroom because we ALL share it together. Because my time with them is limited, I want to ensure they get the most of this time and enjoy it to the best of their abilities. Currently, we have twenty-two desks of differing sizes, yet the desks are similar to the ones the students will use in middle school. We also have a kidney table with crates for seating. I allow my students to choose their own spots while they are working independently or in groups. More often than not, most of them move out of their desks and onto the crates. Believe it or not, this has proven to be more successful than making them stay at their desks! It is because of this that I am looking toward the "Flexible Seating" option for my classroom.\r\nThe students look forward to their work time so they can move around the room. I would like to get rid of the constricting desks and move toward more "fun" seating options. I am requesting various seating so my students have more options to sit. Currently, I have a stool and a papasan chair I inherited from the previous sixth-grade teacher as well as five milk crate seats I made, but I would like to give them more options and reduce the competition for the "good seats". I am also requesting two rugs as not only more seating options but to make the classroom more welcoming and appealing. In order for my students to be able to write and complete work without desks, I am requesting a class set of clipboards. Finally, due to curriculum that requires groups to work together, I am requesting tables that we can fold up when we are not using them to leave more room for our flexible seating options.\r\nI know that with more seating options, they will be that much more excited about coming to school! Thank you for your support in making my classroom one students will remember forever!nannan

In [12]:

```
# https://stackoverflow.com/a/47091490/4084039
import re

def decontracted(phrase):
    # specific
    phrase = re.sub(r"won't", "will not", phrase)
    phrase = re.sub(r"can't", "can not", phrase)

    # general
    phrase = re.sub(r"n't", " not", phrase)
    phrase = re.sub(r"'re", " are", phrase)
    phrase = re.sub(r"'s", " is", phrase)
    phrase = re.sub(r"'d", " would", phrase)
    phrase = re.sub(r"'ll", " will", phrase)
    phrase = re.sub(r"\t", " not", phrase)
    phrase = re.sub(r"'ve", " have", phrase)
    phrase = re.sub(r"\m", " am", phrase)
    return phrase
```



In [13]:

```
sent = decontracted(project_data['essay'].values[20000])
print(sent)
print("="*50)
```

"A person is a person, no matter how small.\" (Dr.Seuss) I teach the smallest students with the biggest enthusiasm for learning. My students learn in many different ways using all of our senses and multiple intelligences. I use a wide range of techniques to help all my students succeed. \r\nStudents in my class come from a variety of different backgrounds which makes for wonderful sharing of experiences and cultures, including Native Americans.\r\nOur school is a caring community of successful learners which can be seen through collaborative student project based learning in and out of the classroom. Kindergarteners in my class love to work with hands-on materials and have many different opportunities to practice a skill before it is mastered. Having the social skills to work cooperatively with friends is a crucial aspect of the kindergarten curriculum.Montana is the perfect place to learn about agriculture and nutrition. My students love to role play in our pretend kitchen in the early childhood classroom. I have had several kids ask me, \"Can we try cooking with REAL food?\" I will take their idea and create \"Common Core Cooking Lessons\" where we learn important math and writing concepts while cooking delicious healthy food for snack time. My students will have a grounded appreciation for the work that went into making the food and knowledge of where the ingredients came from as well as how it is healthy for their bodies. This project would expand our learning of nutrition and agricultural cooking recipes by having us peel our own apples to make homemade applesauce, make our own bread, and mix up healthy plants from our classroom garden in the spring. We will also create our own cookbooks to be printed and shared with families. \r\nStudents will gain math and literature skills as well as a life long enjoyment for healthy cooking.nannan

In [14]:

```
# \r \n \t remove from string python: http://texthandler.com/info/remove-line-breaks-python/
sent = sent.replace('\\r', ' ')
sent = sent.replace('\\n', ' ')
sent = sent.replace('\\t', ' ')
print(sent)
```

A person is a person, no matter how small. (Dr.Seuss) I teach the smallest students with the biggest enthusiasm for learning. My students learn in many different ways using all of our senses and multiple intelligences. I use a wide range of techniques to help all my students succeed. Students in my class come from a variety of different backgrounds which makes for wonderful sharing of experiences and cultures, including Native Americans. Our school is a caring community of successful learners which can be seen through collaborative student project based learning in and out of the classroom. Kindergarteners in my class love to work with hands-on materials and have many different opportunities to practice a skill before it is mastered. Having the social skills to work cooperatively with friends is a crucial aspect of the kindergarten curriculum.Montana is the perfect place to learn about agriculture and nutrition. My students love to role play in our pretend kitchen in the early childhood classroom. I have had several kids ask me, Can we try cooking with REAL food? I will take their idea and create Common Core Cooking Lessons where we learn important math and writing concepts while cooking delicious healthy food for snack time. My students will have a grounded appreciation for the work that went into making the food and knowledge of where the ingredients came from as well as how it is healthy for their bodies. This project would expand our learning of nutrition and agricultural cooking recipes by having us peel our own apples to make homemade applesauce, make our own bread, and mix up healthy plants from our classroom garden in the spring. We will also create our own cookbooks to be printed and shared with families. Students will gain math and literature skills as well as a life long enjoyment for healthy cooking.nannan

In [15]:

```
#remove spacial character: https://stackoverflow.com/a/5843547/4084039
sent = re.sub('[^A-Za-z0-9]+', ' ', sent)
print(sent)
```

A person is a person no matter how small Dr Seuss I teach the smallest students with the biggest enthusiasm for learning My students learn in many different ways using all of our senses and multiple intelligences I use a wide range of techniques to help all my students succeed Students in my class come from a variety of different backgrounds which makes for wonderful sharing of experiences and cultures including Native Americans Our school is a caring community of successful learners which can be seen through collaborative student project based learning in and out of the classroom Kindergarteners in my class love to work with hands on materials and have many different opportunities to practice a skill before it is mastered Having the social skills to work cooperatively with friends is a crucial aspect of the kindergarten curriculum Montana is the



perfect place to learn about agriculture and nutrition My students love to role play in our pretend kitchen in the early childhood classroom I have had several kids ask me Can we try cooking with REAL food I will take their idea and create Common Core Cooking Lessons where we learn important math and writing concepts while cooking delicious healthy food for snack time My students will have a grounded appreciation for the work that went into making the food and knowledge of where the ingredients came from as well as how it is healthy for their bodies This project would expand our learning of nutrition and agricultural cooking recipes by having us peel our own apples to make homemade applesauce make our own bread and mix up healthy plants from our classroom garden in the spring We will also create our own cookbooks to be printed and shared with families Students will gain math and literature skills as well as a life long enjoyment for healthy cooking

In [16]:

```
# https://gist.github.com/sebleier/554280
# we are removing the words from the stop words list: 'no', 'nor', 'not'
stopwords= ['i', 'me', 'my', 'myself', 'we', 'our', 'ours', 'ourselves', 'you', "you're", "you've",
\
            "you'll", "you'd", 'your', 'yours', 'yourself', 'yourselves', 'he', 'him', 'his',
'himself', \
            'she', "she's", 'her', 'hers', 'herself', 'it', "it's", 'its', 'itself', 'they', 'them',
'their',\
            'theirs', 'themselves', 'what', 'which', 'who', 'whom', 'this', 'that', "that'll",
'these', 'those', \
            'am', 'is', 'are', 'was', 'were', 'be', 'been', 'being', 'have', 'has', 'had', 'having',
'do', 'does', \
            'did', 'doing', 'a', 'an', 'the', 'and', 'but', 'if', 'or', 'because', 'as', 'until', '
while', 'of', \
            'at', 'by', 'for', 'with', 'about', 'against', 'between', 'into', 'through', 'during',
'before', 'after',\
            'above', 'below', 'to', 'from', 'up', 'down', 'in', 'out', 'on', 'off', 'over', 'under'
, 'again', 'further',\
            'then', 'once', 'here', 'there', 'when', 'where', 'why', 'how', 'all', 'any', 'both', 'e
ach', 'few', 'more',\
            'most', 'other', 'some', 'such', 'only', 'own', 'same', 'so', 'than', 'too', 'very', \
            's', 't', 'can', 'will', 'just', 'don', "don't", 'should', "should've", 'now', 'd', 'll'
, 'm', 'o', 're', \
            've', 'y', 'ain', 'aren', "aren't", 'couldn', "couldn't", 'didn', "didn't", 'doesn', "d
esn't", 'hadn',\
            "hadn't", 'hasn', "hasn't", 'haven', "haven't", 'isn', "isn't", 'ma', 'mightn',
'mightn't', 'mustn',\
            "mustn't", 'needn', "needn't", 'shan', "shan't", 'shouldn', "shouldn't", 'wasn',
'wasn't', 'weren', "weren't", \
            'won', "won't", 'wouldn', "wouldn't"]
```

In [17]:

```
# Combining all the above students
from tqdm import tqdm
preprocessed_essays = []
# tqdm is for printing the status bar
for sentence in tqdm(project_data['essay'].values):
    sent = decontracted(sentence)
    sent = sent.replace('\r', ' ')
    sent = sent.replace('\n', ' ')
    sent = sent.replace('\n', ' ')
    sent = re.sub('[^A-Za-z0-9]+', ' ', sent)
    # https://gist.github.com/sebleier/554280
    sent = ' '.join(e for e in sent.split() if e.lower() not in stopwords)
    preprocessed_essays.append(sent.lower().strip())
```

```
100%|██████████████████████████████████████████████████████████████████████████| 109248/109248  
[02:11<00:00, 830.15it/s]
```

In [18]:

```
# after preprocessing
preprocessed_essays[20000]
```

Out[18]:

'person person no matter small dr seuss teach smallest students biggest enthusiasm learning  
students learn many different ways using senses multiple intelligences use wide range techniques h

elp students succeed students class come variety different backgrounds makes wonderful sharing exp  
eriences cultures including native americans school caring community successful learners seen coll  
aborative student project based learning classroom kindergarteners class love work hands materials  
many different opportunities practice skill mastered social skills work cooperatively friends cruc  
ial aspect kindergarten curriculum montana perfect place learn agriculture nutrition students love  
role play pretend kitchen early childhood classroom several kids ask try cooking real food take id  
ea create common core cooking lessons learn important math writing concepts cooking delicious heal  
thy food snack time students grounded appreciation work went making food knowledge ingredients cam  
e well healthy bodies project would expand learning nutrition agricultural cooking recipes us peel  
apples make homemade applesauce make bread mix healthy plants classroom garden spring also create  
cookbooks printed shared families students gain math literature skills well life long enjoyment he  
althy cooking nannan'

## 1.4 Preprocessing of `project\_title`

In [20]:

```
# similarly you can preprocess the titles also
# Using above lines of code for preprocessing Title text

from tqdm import tqdm
preprocessed_title = []

for sentence in tqdm(project_data['project_title'].values):
    sentTitle = decontracted(sentence)
    sentTitle = sentTitle.replace('\\r', ' ')
    sentTitle = sentTitle.replace('\\n', ' ')
    sentTitle = sentTitle.replace('\\n', ' ')
    sentTitle = re.sub('[^A-Za-z0-9]+', '', sentTitle)
    # https://gist.github.com/sebleier/554280
    sentTitle = ' '.join(e for e in sentTitle.split() if e not in stopwords)
    preprocessed_title.append(sentTitle.lower().strip())
```

```
100%|██████████████████████████████████████████████████████████████████████████| 109248/109248  
[00:05<00:00, 18614.69it/s]
```

In [24]:

```
# after preprocessing Project title
preprocessed_title[20000]
```

Out[24]:

'health nutritional cooking kindergarten'

## 1.5 Preparing data for models

In [25]:

```
project data.columns
```

Out[25]:

```
Index(['Unnamed: 0', 'id', 'teacher_id', 'teacher_prefix', 'school_state',
      'Date', 'project_grade_category', 'project_title', 'project_essay_1',
      'project_essay_2', 'project_essay_3', 'project_essay_4',
      'project_resource_summary',
      'teacher_number_of_previously_posted_projects', 'project_is_approved',
      'clean_categories', 'clean_subcategories', 'essay'],
      dtype='object')
```

we are going to consider

- school\_state : categorical data
- clean\_categories : categorical data
- clean\_subcategories : categorical data
- project grade category : categorical data

- teacher\_prefix : categorical data
- project\_title : text data
- text : text data
- project\_resource\_summary: text data (optinal)
- quantity : numerical (optinal)
- teacher\_number\_of\_previously\_posted\_projects : numerical
- price : numerical

## 1.5.1 Vectorizing Categorical data

- <https://www.appliedaicourse.com/course/applied-ai-course-online/lessons/handling-categorical-and-numerical-features/>

In [26]:

```
# we use count vectorizer to convert the values into one
from sklearn.feature_extraction.text import CountVectorizer
vectorizer = CountVectorizer(vocabulary=list(sorted_cat_dict.keys()), lowercase=False, binary=True)
categories_one_hot = vectorizer.fit_transform(project_data['clean_categories'].values)
print(vectorizer.get_feature_names())
print("Shape of matrix after one hot encodig ",categories_one_hot.shape)
```

```
['Warmth', 'Care_Hunger', 'History_Civics', 'Music_Arts', 'AppliedLearning', 'SpecialNeeds',
'Health_Sports', 'Math_Science', 'Literacy_Language']
Shape of matrix after one hot encodig (109248, 9)
```

In [27]:

```
# we use count vectorizer to convert the values into one
vectorizer = CountVectorizer(vocabulary=list(sorted_sub_cat_dict.keys()), lowercase=False, binary=True)
sub_categories_one_hot = vectorizer.fit_transform(project_data['clean_subcategories'].values)
print(vectorizer.get_feature_names())
print("Shape of matrix after one hot encodig ",sub_categories_one_hot.shape)
```

```
['Economics', 'CommunityService', 'FinancialLiteracy', 'ParentInvolvement', 'Extracurricular',
'Civics_Government', 'ForeignLanguages', 'NutritionEducation', 'Warmth', 'Care_Hunger',
'SocialSciences', 'PerformingArts', 'CharacterEducation', 'TeamSports', 'Other',
'College_CareerPrep', 'Music', 'History_Geography', 'Health_LifeScience', 'EarlyDevelopment', 'ESL',
'Gym_Fitness', 'EnvironmentalScience', 'VisualArts', 'Health_Wellness', 'AppliedSciences',
'SpecialNeeds', 'Literature_Writing', 'Mathematics', 'Literacy']
Shape of matrix after one hot encodig (109248, 30)
```

## 1.5.2 Vectorizing Text data

### 1.5.2.1 Bag of words

In [28]:

```
# We are considering only the words which appeared in at least 10 documents(rows or projects).
vectorizer = CountVectorizer(min_df=10)
text_bow = vectorizer.fit_transform(preprocessed_essays)
print("Shape of matrix after one hot encodig ",text_bow.shape)
```

```
Shape of matrix after one hot encodig (109248, 16512)
```

In [29]:

```
# Similarly you can vectorize for title also
# Using above lines of code

vectorizerTitle = CountVectorizer(min_df=10)
```

```
text_bow_title = vectorizerTitle.fit_transform(preprocessed_title)
print("Shape of matrix after one hot encodig ",text_bow_title.shape)
```

Shape of matrix after one hot encodig (109248, 3329)

### 1.5.2.2 TFIDF vectorizer

In [30]:

```
from sklearn.feature_extraction.text import TfidfVectorizer
vectorizer = TfidfVectorizer(min_df=10)
text_tfidf = vectorizer.fit_transform(preprocessed_essays)
print("Shape of matrix after one hot encodig ",text_tfidf.shape)
```

Shape of matrix after one hot encodig (109248, 16512)

In [31]:

```
# Similarly you can vectorize for title also
# Using above lines of code

from sklearn.feature_extraction.text import TfidfVectorizer
vectorizer = TfidfVectorizer(min_df=10)
text_tfidf = vectorizer.fit_transform(preprocessed_title)
print("Shape of matrix after one hot encodig ",text_tfidf.shape)
```

Shape of matrix after one hot encodig (109248, 3329)

### 1.5.2.3 Using Pretrained Models: Avg W2V

In [32]:

```
'''
# Reading glove vectors in python: https://stackoverflow.com/a/38230349/4084039
def loadGloveModel(gloveFile):
    print ("Loading Glove Model")
    f = open(gloveFile,'r', encoding="utf8")
    model = {}
    for line in tqdm(f):
        splitLine = line.split()
        word = splitLine[0]
        embedding = np.array([float(val) for val in splitLine[1:]])
        model[word] = embedding
    print ("Done.",len(model)," words loaded!")
    return model
model = loadGloveModel('glove.42B.300d.txt')

# =====
Output:

Loading Glove Model
1917495it [06:32, 4879.69it/s]
Done. 1917495 words loaded!

# =====

words = []
for i in preproced_texts:
    words.extend(i.split(' '))

for i in preproced_titles:
    words.extend(i.split(' '))
print("all the words in the coupus", len(words))
words = set(words)
print("the unique words in the coupus", len(words))

inter_words = set(model.keys()).intersection(words)
print("The number of words that are present in both glove vectors and our coupus", \
      len(inter_words), "(",np.round(len(inter_words)/len(words)*100,3),"%")
'''
```

///

```
'\n# Reading glove vectors in python: https://stackoverflow.com/a/38230349/4084039\ndef
loadGloveModel(gloveFile):\n    print ("Loading Glove Model")\n    f = open(gloveFile,\'r\',
encoding="utf8")\n    model = {}\n    for line in tqdm(f):\n        splitLine = line.split()\n    word = splitLine[0]\n        embedding = np.array([float(val) for val in splitLine[1:]])\n        model[word] = embedding\n    print ("Done.",len(model)," words loaded!")\n    return model\nmodel =
loadGloveModel(\'glove.42B.300d.txt\')\n\n# =====\n\nOutput:\n\nLoading G
love Model\n1917495it [06:32, 4879.69it/s]\nDone. 1917495 words loaded!\n\n#
=====
\n\nwords = []\nfor i in preprocod_texts:\n    words.extend(i.split(\'
\'))\n\nfor i in preprocod_titles:\n    words.extend(i.split(\' \'))\n\nprint("all the words in the
coupus", len(words))\n\nwords = set(words)\n\nprint("the unique words in the coupus",
len(words))\n\ninter_words = set(model.keys()).intersection(words)\n\nprint("The number of words tha
t are present in both glove vectors and our coupus", len(inter_words),
("np.round(len(inter_words)/len(words)*100,3),"%")\n\nwords_courpus = {}\nwords_glove =
set(model.keys())\n\nfor i in words:\n    if i in words_glove:\n        words_courpus[i] = model[i]\n
print("word 2 vec length", len(words_courpus))\n\n# stronging variables into pickle files python
: http://www.jessicayung.com/how-to-use-pickle-to-save-and-load-variables-in-python/\n\nimport pic
kle\n\nwith open(\'glove vectors\', \'wb\') as f:\n    pickle.dump(words_courpus, f)\n\n\n'
```

```
# make sure you have the glove_vectors file
with open('glove_vectors', 'rb') as f:
    model = pickle.load(f)
    glove_words = set(model.keys())
```

```
# average Word2Vec
# compute average word2vec for each review.
avg_w2v_vectors = []; # the avg-w2v for each sentence/review is stored in this list
for sentence in tqdm(preprocessed_essays): # for each review/sentence
    vector = np.zeros(300) # as word vectors are of zero length
    cnt_words = 0; # num of words with a valid vector in the sentence/review
    for word in sentence.split(): # for each word in a review/sentence
        if word in glove_words:
            vector += model[word]
            cnt_words += 1
    if cnt_words != 0:
        vector /= cnt_words
    avg_w2v_vectors.append(vector)

print(len(avg_w2v_vectors))
print(len(avg_w2v_vectors[0]))
```

109248  
300

In [119]:

```
# Similarly you can vectorize for title also
# Using above lines of code
# average Word2Vec for Project Title

avg_w2v_vectors_title = []; # the avg-w2v for each sentence/review is stored in this list
for sentence in tqdm(preprocessed_title): # for each review/sentence
    vector = np.zeros(300) # as word vectors are of zero length
    cnt_words = 0; # num of words with a valid vector in the sentence/review
    for word in sentence.split(): # for each word in a review/sentence
        if word in glove_words:
            vector += model[word]
            cnt_words += 1
    if cnt_words != 0:
        vector /= cnt_words
    avg_w2v_vectors_title.append(vector)

print(len(avg_w2v_vectors_title))
print(len(avg_w2v_vectors_title[0]))
```

```
100%|████████████████████████████████████████████████████████████████████████████████| 109248/109248
[00:01<00:00, 60301.49it/s]
```

```
109248
300
```

### 1.5.2.3 Using Pretrained Models: TFIDF weighted W2V

In [37]:

```
# S = ["abc def pqr", "def def def abc", "pqr pqr def"]
tfidf_model = TfidfVectorizer()
tfidf_model.fit(preprocessed_essays)
# we are converting a dictionary with word as a key, and the idf as a value
dictionary = dict(zip(tfidf_model.get_feature_names(), list(tfidf_model.idf_)))
tfidf_words = set(tfidf_model.get_feature_names())
```

In [38]:

```
# average Word2Vec
# compute average word2vec for each review.
tfidf_w2v_vectors = []; # the avg-w2v for each sentence/review is stored in this list
for sentence in tqdm(preprocessed_essays): # for each review/sentence
    vector = np.zeros(300) # as word vectors are of zero length
    tf_idf_weight = 0; # num of words with a valid vector in the sentence/review
    for word in sentence.split(): # for each word in a review/sentence
        if (word in glove_words) and (word in tfidf_words):
            vec = model[word] # getting the vector for each word
            # here we are multiplying idf value(dictionary[word]) and the tf
            value((sentence.count(word)/len(sentence.split())))
            tf_idf = dictionary[word]*(sentence.count(word)/len(sentence.split())) # getting the tf
            idf value for each word
            vector += (vec * tf_idf) # calculating tfidf weighted w2v
            tf_idf_weight += tf_idf
    if tf_idf_weight != 0:
        vector /= tf_idf_weight
    tfidf_w2v_vectors.append(vector)

print(len(tfidf_w2v_vectors))
print(len(tfidf_w2v_vectors[0]))
```

```
100%|████████████████████████████████████████████████████████████████████████████████| 109248/109248
[07:32<00:00, 241.30it/s]
```

```
109248
300
```

In [39]:

```
# Similarly you can vectorize for title also
```

```
tfidf_model_title = TfidfVectorizer()
tfidf_model_title.fit(preprocessed_title)
# we are converting a dictionary with word as a key, and the idf as a value
dictionary_title = dict(zip(tfidf_model_title.get_feature_names(), list(tfidf_model_title.idf_)))
tfidf_words_title = set(tfidf_model_title.get_feature_names())
```

```
# Using above lines of code
# average Word2Vec
# compute average word2vec for each review.
tfidf_w2v_vectors_title = []; # the avg-w2v for each sentence/review is stored in this list
for sentence in tqdm(preprocessed_title): # for each review/sentence
    vector = np.zeros(300) # as word vectors are of zero length
    tf_idf_weight = 0; # num of words with a valid vector in the sentence/review
    for word in sentence.split(): # for each word in a review/sentence
        if (word in glove_words) and (word in tfidf_words_title):
            vec = model[word] # getting the vector for each word
            # here we are multiplying idf value(dictionary[word]) and the tf
            value((sentence.count(word)/len(sentence.split())))
            tf_idf = dictionary_title[word]*(sentence.count(word)/len(sentence.split())) # getting
            the tfidf value for each word
            vector += (vec * tf_idf) # calculating tfidf weighted w2v
            tf_idf_weight += tf_idf
    if tf_idf_weight != 0:
        vector /= tf_idf_weight
    tfidf_w2v_vectors_title.append(vector)

print(len(tfidf_w2v_vectors_title))
print(len(tfidf_w2v_vectors_title[0]))
```

109248  
300

## In [41]:

In [42]:

Mean : 298.1193425966608, Standard deviation : 367.49634838483496

In [43]:



```
price_standardized
```

Out[43]:

```
array([[ 1.16172762],
       [-0.23153793],
       [ 0.08402983],
       ...,
       [ 0.27450792],
       [-0.0282706 ],
       [-0.79625102]])
```

### 1.5.4 Merging all the above features

- we need to merge all the numerical vectors i.e categorical, text, numerical vectors

In [44]:

```
print(categories_one_hot.shape)
print(sub_categories_one_hot.shape)
print(text_bow.shape)
print(price_standardized.shape)
```

```
(109248, 9)
(109248, 30)
(109248, 16512)
(109248, 1)
```

In [45]:

```
# merge two sparse matrices: https://stackoverflow.com/a/19710648/4084039
from scipy.sparse import hstack
# with the same hstack function we are concatenating a sparse matrix and a dense matrix :)
X = hstack((categories_one_hot, sub_categories_one_hot, text_bow, price_standardized))
X.shape
```

Out[45]:

```
(109248, 16552)
```

## Assignment 3: Apply KNN

### 1. [Task-1] Apply KNN(brute force version) on these feature sets

- **Set 1:** categorical, numerical features + project\_title(BOW) + preprocessed\_essay (BOW)
- **Set 2:** categorical, numerical features + project\_title(TFIDF)+ preprocessed\_essay (TFIDF)
- **Set 3:** categorical, numerical features + project\_title(AVG W2V)+ preprocessed\_essay (AVG W2V)
- **Set 4:** categorical, numerical features + project\_title(TFIDF W2V)+ preprocessed\_essay (TFIDF W2V)

### 2. Hyper parameter tuning to find best K

- Find the best hyper parameter which results in the maximum [AUC](#) value
- Find the best hyper parameter using k-fold cross validation (or) simple cross validation data
- Use gridsearch-cv or randomsearch-cv or write your own for loops to do this task

### 3. Representation of results

- You need to plot the performance of model both on train data and cross validation data for each hyper parameter, as shown in the figure
- Once you find the best hyper parameter, you need to train your model-M using the best hyper-param. Now, find the AUC on test data and plot the ROC curve on both train and test using model-M.
- Along with plotting ROC curve, you need to print the [confusion matrix](#) with predicted and original labels of test data points

### 4. [Task-2]

- Select top 2000 features from feature **Set 2** using `SelectKBest` and then apply KNN on top of these features

```

•
from sklearn.datasets import load_digits
from sklearn.feature_selection import SelectKBest, chi2
X, y = load_digits(return_X_y=True)
X.shape
X_new = SelectKBest(chi2, k=20).fit_transform(X, y)
X_new.shape
=====
output:
(1797, 64)
(1797, 20)

```

- Repeat the steps 2 and 3 on the data matrix after feature selection

## 5. Conclusion

- You need to summarize the results at the end of the notebook, summarize it in the table format. To print out a table please refer to this prettytable library [link](#)

### Note: Data Leakage

1. There will be an issue of data-leakage if you vectorize the entire data and then split it into train/cv/test.
2. To avoid the issue of data-leakage, make sure to split your data first and then vectorize it.
3. While vectorizing your data, apply the method `fit_transform()` on you train data, and apply the method `transform()` on cv/test data.
4. For more details please go through this [link](#).

## 2. K Nearest Neighbor

### 2.1 Splitting data into Train and cross validation(or test): Stratified Sampling

In [196]:

```

# please write all the code with proper documentation, and proper titles for each subsection
# go through documentations and blogs before you start coding
# first figure out what to do, and then think about how to do.
# reading and understanding error messages will be very much helpfull in debugging your code
# when you plot any graph make sure you use
# a. Title, that describes your plot, this will be very helpful to the reader
# b. Legends if needed
# c. X-axis label
# d. Y-axis label

# Data splitting
# Using project_data, which is a merge of project_data , price_date tables

from sklearn.model_selection import train_test_split
Donor_train, Donor_test, Approved_train, Approved_test = train_test_split(project_data, project_data[
    'project_is_approved'], test_size=0.33, stratify=project_data['project_is_approved'])
Donor_train, Donor_cv, Approved_train, Approved_cv = train_test_split(Donor_train, Approved_train,
    test_size=0.33, stratify=Approved_train)

```

In [86]:

```

print(Donor_train.shape, Approved_train.shape)
print(Donor_test.shape, Approved_test.shape)
print(Donor_cv.shape, Approved_cv.shape)
project_data.columns

```

```

(49041, 20) (49041,)
(36052, 20) (36052,)
(24155, 20) (24155,)

```

Out[86]:

```
Index(['Unnamed: 0', 'id', 'teacher_id', 'teacher_prefix', 'school_state',
      'Date', 'project_grade_category', 'project_title', 'project_essay_1',
      'project_essay_2', 'project_essay_3', 'project_essay_4',
      'project_resource_summary',
      'teacher_number_of_previously_posted_projects', 'project_is_approved',
      'clean_categories', 'clean_subcategories', 'essay', 'price',
      'quantity'],
      dtype='object')
```

## 2.2 Make Data Model Ready: encoding numerical, categorical features

### Categorical features

In [83]:

```
# please write all the code with proper documentation, and proper titles for each subsection
# go through documentations and blogs before you start coding
# first figure out what to do, and then think about how to do.
# reading and understanding error messages will be very much helpfull in debugging your code
# make sure you featurize train and test data separatly

# when you plot any graph make sure you use
# a. Title, that describes your plot, this will be very helpful to the reader
# b. Legends if needed
# c. X-axis label
# d. Y-axis label

# One hot encoding the catogorical features : School State, Clean Categories, Clean Sub-Categories
, Project Grade and Teacher Prefix

# One hot Encoding for School State
vectorizer = CountVectorizer()
vectorizer.fit(Donor_train['school_state'].values) # fit has to happen only on train data
Donor_train_state_ohe = vectorizer.transform(Donor_train['school_state'].values)
Donor_cv_state_ohe = vectorizer.transform(Donor_cv['school_state'].values)
Donor_test_state_ohe = vectorizer.transform(Donor_test['school_state'].values)

# Print One Hot Encoding - School State output
print("After vectorizations School state")
print(Donor_train_state_ohe.shape, Approved_train.shape)
print(Donor_cv_state_ohe.shape, Approved_cv.shape)
print(Donor_test_state_ohe.shape, Approved_test.shape)
print(vectorizer.get_feature_names())
print("="*100)
```

After vectorizations School state

```
(49041, 51) (49041,)
(24155, 51) (24155,)
(36052, 51) (36052,)
['ak', 'al', 'ar', 'az', 'ca', 'co', 'ct', 'dc', 'de', 'fl', 'ga', 'hi', 'ia', 'id', 'il', 'in', 'k
s', 'ky', 'la', 'ma', 'md', 'me', 'mi', 'mn', 'mo', 'ms', 'mt', 'nc', 'nd', 'ne', 'nh', 'nj', 'nm',
'nv', 'ny', 'oh', 'ok', 'or', 'pa', 'ri', 'sc', 'sd', 'tn', 'tx', 'ut', 'va', 'vt', 'wa', 'wi', 'wv
', 'wy']
=====
```

In [188]:

```
# Preprocessing Project grade
from collections import Counter
my_counter = Counter()
for word in project_data['project_grade_category'].values:
    my_counter.update(word.split(" ",1))

project_grade_category_dict = dict(my_counter)
sorted_project_grade_category_dict = dict(sorted(project_grade_category_dict.items(), key=lambda
kv: kv[1]))
vectorizer = CountVectorizer(vocabulary=list(sorted_project_grade_category_dict.keys()), lowercase
False)
```

```
=False, binary=True)

# One Hot Encoding - Project grade category

vectorizer.fit(Donor_train['project_grade_category'].values) # fit has to happen only on train
data
Donor_train_grade_ohe = vectorizer.transform(Donor_train['project_grade_category'].values)
Donor_cv_grade_ohe = vectorizer.transform(Donor_cv['project_grade_category'].values)
Donor_test_grade_ohe = vectorizer.transform(Donor_test['project_grade_category'].values)

# Print One Hot Encoding - Project grade output
print("After vectorizations Project grade category")
print(Donor_train_grade_ohe.shape, Approved_train.shape)
print(Donor_cv_grade_ohe.shape, Approved_cv.shape)
print(Donor_test_grade_ohe.shape, Approved_test.shape)
print(vectorizer.get_feature_names())
print("="*100)
```

```
After vectorizations Project grade category
(49041, 4) (49041,)
(24155, 4) (24155,)
(36052, 4) (36052,)
['Grades 9-12', 'Grades 6-8', 'Grades 3-5', 'Grades PreK-2']
=====
```

In [87]:

```
# One hot Encoding for project subject categories
vectorizer = CountVectorizer()
vectorizer.fit(Donor_train['clean_categories'].values) # fit has to happen only on train data
Donor_train_clean_cat_ohe = vectorizer.transform(Donor_train['clean_categories'].values)
Donor_cv_clean_cat_ohe = vectorizer.transform(Donor_cv['clean_categories'].values)
Donor_test_clean_cat_ohe = vectorizer.transform(Donor_test['clean_categories'].values)

# Print One Hot Encoding - Project subject output
print("After vectorizations project subject categories")
print(Donor_train_clean_cat_ohe.shape, Approved_train.shape)
print(Donor_cv_clean_cat_ohe.shape, Approved_cv.shape)
print(Donor_test_clean_cat_ohe.shape, Approved_test.shape)
print(vectorizer.get_feature_names())
print("="*100)
```

```
After vectorizations project subject categories
(49041, 9) (49041,)
(24155, 9) (24155,)
(36052, 9) (36052,)
['appliedlearning', 'care_hunger', 'health_sports', 'history_civics', 'literacy_language',
'math_science', 'music_arts', 'specialneeds', 'warmth']
=====
```

In [88]:

```
# One hot Encoding for project subject subcategories
vectorizer = CountVectorizer()
vectorizer.fit(Donor_train['clean_subcategories'].values) # fit has to happen only on train data
Donor_train_clean_subcat_ohe = vectorizer.transform(Donor_train['clean_subcategories'].values)
Donor_cv_clean_subcat_ohe = vectorizer.transform(Donor_cv['clean_subcategories'].values)
Donor_test_clean_subcat_ohe = vectorizer.transform(Donor_test['clean_subcategories'].values)

# Print One Hot Encoding - project subject subcategories output
print("After vectorizations project subject subcategories")
print(Donor_train_clean_subcat_ohe.shape, Approved_train.shape)
print(Donor_cv_clean_subcat_ohe.shape, Approved_cv.shape)
print(Donor_test_clean_subcat_ohe.shape, Approved_test.shape)
print(vectorizer.get_feature_names())
print("="*100)
```

```
After vectorizations project subject subcategories
(49041, 30) (49041,)
(24155, 30) (24155,)
(36052, 30) (36052,)
['appliedlearning', 'care_hunger', 'health_sports', 'history_civics', 'literacy_language',
```

```
['appliedsciences', 'care_nunger', 'charactereducation', 'civics_government',  
'college_careerprep', 'communityservice', 'earlydevelopment', 'economics', 'environmentalscience',  
'esl', 'extracurricular', 'financialliteracy', 'foreignlanguages', 'gym_fitness',  
'health_lifescience', 'health_wellness', 'history_geography', 'literacy', 'literature_writing', 'm  
athematics', 'music', 'nutritioneducation', 'other', 'parentinvolvement', 'performingarts', 'socia  
lsciences', 'specialneeds', 'teamsports', 'visualarts', 'warmth']  
=====
```

In [203]:

```
# To avoid np.NaN invalid document error;  
# Source : https://stackoverflow.com/questions/39303912/tfidfvectorizer-in-scikit-learn-  
valueerror-np-nan-is-an-invalid-document/39308809  
# One hot Encoding for Teacher Prefix  
vectorizer = CountVectorizer()  
vectorizer.fit(Donor_train['teacher_prefix'].values.astype('U')) # fit has to happen only on train  
data  
Donor_train_teacher_ohe = vectorizer.transform(Donor_train['teacher_prefix'].values.astype('U'))  
Donor_cv_teacher_ohe = vectorizer.transform(Donor_cv['teacher_prefix'].values.astype('U'))  
Donor_test_teacher_ohe = vectorizer.transform(Donor_test['teacher_prefix'].values.astype('U'))  
  
# Print One Hot Encoding - Teacher Prefix output  
print("After vectorizations Teacher Prefix")  
print(Donor_train_teacher_ohe.shape, Approved_train.shape)  
print(Donor_cv_teacher_ohe.shape, Approved_cv.shape)  
print(Donor_test_teacher_ohe.shape, Approved_test.shape)  
print(vectorizer.get_feature_names())  
print("="*100)
```

```
After vectorizations Teacher Prefix  
(49041, 5) (49041,)  
(24155, 5) (24155,)  
(36052, 5) (36052,)  
['dr', 'mr', 'mrs', 'ms', 'teacher']  
=====
```

## Numerical Features

In [92]:

```
# Normalizing the Numerical data : Price  
# Using code from Sample solution  
  
from sklearn.preprocessing import Normalizer  
normalizer = Normalizer()  
normalizer.fit(Donor_train['price'].values.reshape(-1,1))  
Donor_train_price_norm = normalizer.transform(Donor_train['price'].values.reshape(-1,1))  
Donor_cv_price_norm = normalizer.transform(Donor_cv['price'].values.reshape(-1,1))  
Donor_test_price_norm = normalizer.transform(Donor_test['price'].values.reshape(-1,1))  
  
print("After vectorizations Numerical Data: Price")  
print(Donor_train_price_norm.shape, Approved_train.shape)  
print(Donor_cv_price_norm.shape, Approved_cv.shape)  
print(Donor_test_price_norm.shape, Approved_test.shape)  
print("="*100)
```

```
After vectorizations Numerical Data: Price  
(49041, 1) (49041,)  
(24155, 1) (24155,)  
(36052, 1) (36052,)  
=====
```

In [93]:

```
# Normalizing the Numerical data : teacher_number_of_previously_posted_projects  
  
from sklearn.preprocessing import Normalizer  
normalizer = Normalizer()  
normalizer.fit(Donor_train['teacher_number_of_previously_posted_projects'].values.reshape(-1,1))
```

```

normalizer.fit(Donor_train['teacher_number_of_previously_posted_projects'].values.reshape(-1,1))
Donor_train_postedCount_norm =
normalizer.transform(Donor_train['teacher_number_of_previously_posted_projects'].values.reshape(-1,1))
Donor_cv_postedCount_norm =
normalizer.transform(Donor_cv['teacher_number_of_previously_posted_projects'].values.reshape(-1,1))

Donor_test_postedCount_norm =
normalizer.transform(Donor_test['teacher_number_of_previously_posted_projects'].values.reshape(-1,1))

print("After vectorizations Numerical Data: Previously Posted Projects")
print(Donor_train_postedCount_norm.shape, Approved_train.shape)
print(Donor_cv_postedCount_norm.shape, Approved_cv.shape)
print(Donor_test_postedCount_norm.shape, Approved_test.shape)
print("=="*100)

```

After vectorizations Numerical Data: Previously Posted Projects

```

(49041, 1) (49041,)
(24155, 1) (24155,)
(36052, 1) (36052,)
=====

```

In [94]:

```

# Normalizing the Numerical data : Quantity
# Using code from Sample solution

from sklearn.preprocessing import Normalizer
normalizer = Normalizer()
normalizer.fit(Donor_train['quantity'].values.reshape(-1,1))
Donor_train_quantity_norm = normalizer.transform(Donor_train['quantity'].values.reshape(-1,1))
Donor_cv_quantity_norm = normalizer.transform(Donor_cv['quantity'].values.reshape(-1,1))
Donor_test_quantity_norm = normalizer.transform(Donor_test['quantity'].values.reshape(-1,1))

print("After vectorizations Numerical Data: Quantity")
print(Donor_train_quantity_norm.shape, Approved_train.shape)
print(Donor_cv_quantity_norm.shape, Approved_cv.shape)
print(Donor_test_quantity_norm.shape, Approved_test.shape)
print("=="*100)

```

After vectorizations Numerical Data: Quantity

```

(49041, 1) (49041,)
(24155, 1) (24155,)
(36052, 1) (36052,)
=====

```

## 2.3 Make Data Model Ready: encoding eassay, and project\_title

### BoW : Project Essays

In [95]:

```

# Using sample solution code
# Using max features as 5000, to make column size same

from sklearn.feature_extraction.text import CountVectorizer
vectorizer = CountVectorizer(min_df=10,ngram_range=(1,4), max_features=5000)
vectorizer.fit(Donor_train['essay'].values) # fit has to happen only on train data
Donor_train_essay_bow = vectorizer.transform(Donor_train['essay'].values)
Donor_cv_essay_bow = vectorizer.transform(Donor_cv['essay'].values)
Donor_test_essay_bow = vectorizer.transform(Donor_test['essay'].values)

print("After vectorizing Project Essays BoW")
print(Donor_train_essay_bow.shape, Approved_train.shape)
print(Donor_cv_essay_bow.shape, Approved_cv.shape)
print(Donor_test_essay_bow.shape, Approved_test.shape)
print("=="*100)

```

After vectorizing Project Essays BoW

```
(49041, 5000) (49041,)  
(24155, 5000) (24155,)  
(36052, 5000) (36052,)
```

=====

## BoW : Project Title

In [96]:

```
# Using sample solution code  
# Using max features as 3000, to make column size same  
  
from sklearn.feature_extraction.text import CountVectorizer  
vectorizer = CountVectorizer(min_df=10,ngram_range=(1,4), max_features=3000)  
vectorizer.fit(Donor_train['project_title'].values) # fit has to happen only on train data  
Donor_train_title_bow = vectorizer.transform(Donor_train['project_title'].values)  
Donor_cv_title_bow = vectorizer.transform(Donor_cv['project_title'].values)  
Donor_test_title_bow = vectorizer.transform(Donor_test['project_title'].values)  
  
print("After vectorizing Project Essays BoW")  
print(Donor_train_title_bow.shape, Approved_train.shape)  
print(Donor_cv_title_bow.shape, Approved_cv.shape)  
print(Donor_test_title_bow.shape, Approved_test.shape)  
print("=="*100)
```

After vectorizing Project Essays BoW

```
(49041, 3000) (49041,)  
(24155, 3000) (24155,)  
(36052, 3000) (36052,)
```

=====

## TFIDF : Project Essays

In [106]:

```
from sklearn.feature_extraction.text import TfidfVectorizer  
vectorizer = TfidfVectorizer(min_df=10,ngram_range=(1,4), max_features=5000)  
vectorizer.fit(Donor_train['essay'].values) # fit has to happen only on train data  
Donor_train_essay_tfidf = vectorizer.transform(Donor_train['essay'].values)  
Donor_cv_essay_tfidf = vectorizer.transform(Donor_cv['essay'].values)  
Donor_test_essay_tfidf = vectorizer.transform(Donor_test['essay'].values)  
  
print("After vectorizing Project Essays TFIDF")  
print(Donor_train_essay_tfidf.shape, Approved_train.shape)  
print(Donor_cv_essay_tfidf.shape, Approved_cv.shape)  
print(Donor_test_essay_tfidf.shape, Approved_test.shape)  
print("=="*100)
```

After vectorizing Project Essays TFIDF

```
(49041, 5000) (49041,)  
(24155, 5000) (24155,)  
(36052, 5000) (36052,)
```

=====

## TFIDF : Project Title

In [107]:

```
from sklearn.feature_extraction.text import TfidfVectorizer  
vectorizer = TfidfVectorizer(min_df=10,ngram_range=(1,4), max_features=3000)  
vectorizer.fit(Donor_train['project_title'].values) # fit has to happen only on train data  
Donor_train_title_tfidf = vectorizer.transform(Donor_train['project_title'].values)  
Donor_cv_title_tfidf = vectorizer.transform(Donor_cv['project_title'].values)
```



```
print("After vectorizing Project Title using TFIDF: ")
print(Donor_train_title_tfidf.shape, Approved_train.shape)
print(Donor_cv_title_tfidf.shape, Approved_cv.shape)
print(Donor_test_title_tfidf.shape, Approved_test.shape)
print("="*100)
```

```
(49041, 3000) (49041,)
(24155, 3000) (24155,)
(36052, 3000) (36052,)
```

In [116]:

```
print(len(avg_w2v_vectors_train_essays))
print(len(avg_w2v_vectors_train_essays[0]))
```

```
print(len(avg_w2v_vectors_cv_essays))
print(len(avg_w2v_vectors_cv_essays[0]))
```

```
print(len(avg_w2v_vectors_test_essays))
print(len(avg_w2v_vectors_test_essays[0]))
```

100%|██| 24155/24155  
 [00:09<00:00, 2539.29it/s]

24155  
 300

100%|██| 36052/36052  
 [00:14<00:00, 2572.04it/s]

36052  
 300

## AVG W2V : Project Title

In [118]:

```
# AVG W2V for Train Data
avg_w2v_vectors_train_title = []; # the avg-w2v for each sentence/review is stored in this list
for sentence in tqdm(Donor_train['project_title']): # for each review/sentence
    vector = np.zeros(300) # as word vectors are of zero length
    cnt_words = 0; # num of words with a valid vector in the sentence/review
    for word in sentence.split(): # for each word in a review/sentence
        if word in glove_words:
            vector += model[word]
            cnt_words += 1
    if cnt_words != 0:
        vector /= cnt_words
    avg_w2v_vectors_train_title.append(vector)

print(len(avg_w2v_vectors_train_title))
print(len(avg_w2v_vectors_train_title[0]))

# AVG W2V for CV Data
avg_w2v_vectors_cv_title = []; # the avg-w2v for each sentence/review is stored in this list
for sentence in tqdm(Donor_cv['project_title']): # for each review/sentence
    vector = np.zeros(300) # as word vectors are of zero length
    cnt_words = 0; # num of words with a valid vector in the sentence/review
    for word in sentence.split(): # for each word in a review/sentence
        if word in glove_words:
            vector += model[word]
            cnt_words += 1
    if cnt_words != 0:
        vector /= cnt_words
    avg_w2v_vectors_cv_title.append(vector)

print(len(avg_w2v_vectors_cv_title))
print(len(avg_w2v_vectors_cv_title[0]))

# AVG W2V for Test Data
avg_w2v_vectors_test_title = []; # the avg-w2v for each sentence/review is stored in this list
for sentence in tqdm(Donor_test['project_title']): # for each review/sentence
    vector = np.zeros(300) # as word vectors are of zero length
    cnt_words = 0; # num of words with a valid vector in the sentence/review
    for word in sentence.split(): # for each word in a review/sentence
        if word in glove_words:
            vector += model[word]
            cnt_words += 1
    if cnt_words != 0:
        vector /= cnt_words
    avg_w2v_vectors_test_title.append(vector)

print(len(avg_w2v_vectors_test_title))
print(len(avg_w2v_vectors_test_title[0]))
```

100%|██| 49041/49041  
 [00:00<00:00, 128856.75it/s]

49041

```
100%|██████████████████████████████████████████████████████████████████████████| 24155/24155  
[00:00<00:00, 153223.57it/s]
```

```
100%|██████████████████████████████████████████████████████████████████████████████| 36052/36052  
[00:00<00:00, 146613.77it/s]
```

```
Donor_train_tfidf_w2v_vectors = [];
for sentence in tqdm(Donor_train['essay']): # for each review/sentence
    vector = np.zeros(300) # as word vectors are of zero length
    tf_idf_weight = 0; # num of words with a valid vector in the sentence/review
    for word in sentence.split(): # for each word in a review/sentence
        if (word in glove_words) and (word in tfidf_words):
            vec = model[word] # getting the vector for each word
            tf_idf = dictionary[word]*(sentence.count(word)/len(sentence.split())) # getting the tf
idf value for each word
            vector += (vec * tf_idf) # calculating tfidf weighted w2v
            tf_idf_weight += tf_idf
    if tf_idf_weight != 0:
        vector /= tf_idf_weight
    Donor_train_tfidf_w2v_vectors.append(vector)

print(len(Donor_train_tfidf_w2v_vectors))
print(len(Donor_train_tfidf_w2v_vectors[0]))

Donor_cv_tfidf_w2v_vectors = [];
for sentence in tqdm(Donor_cv['essay']): # for each review/sentence
    vector = np.zeros(300) # as word vectors are of zero length
    tf_idf_weight = 0; # num of words with a valid vector in the sentence/review
    for word in sentence.split(): # for each word in a review/sentence
        if (word in glove_words) and (word in tfidf_words):
            vec = model[word] # getting the vector for each word
            tf_idf = dictionary[word]*(sentence.count(word)/len(sentence.split())) # getting the tf
idf value for each word
            vector += (vec * tf_idf) # calculating tfidf weighted w2v
            tf_idf_weight += tf_idf
    if tf_idf_weight != 0:
        vector /= tf_idf_weight
    Donor_cv_tfidf_w2v_vectors.append(vector)

print(len(Donor_cv_tfidf_w2v_vectors))
print(len(Donor_cv_tfidf_w2v_vectors[0]))

Donor_test_tfidf_w2v_vectors = [];
for sentence in tqdm(Donor_test['essay']): # for each review/sentence
    vector = np.zeros(300) # as word vectors are of zero length
    tf_idf_weight = 0; # num of words with a valid vector in the sentence/review
    for word in sentence.split(): # for each word in a review/sentence
        if (word in glove_words) and (word in tfidf_words):
            vec = model[word] # getting the vector for each word
            tf_idf = dictionary[word]*(sentence.count(word)/len(sentence.split())) # getting the tf
idf value for each word
            vector += (vec * tf_idf) # calculating tfidf weighted w2v
            tf_idf_weight += tf_idf
    if tf_idf_weight != 0:
        vector /= tf_idf_weight
    Donor_test_tfidf_w2v_vectors.append(vector)

print(len(Donor_test_tfidf_w2v_vectors))
print(len(Donor_test_tfidf_w2v_vectors[0]))
```

```
100%|███████████████████████████████████████████████████████████| 49041/49041 [01:  
59<00:00, 410.35it/s]
```

49041  
300

[illegible]

24155  
300

[illegible]

36052  
300

In [133]:

```

Donor_train_tfidf_w2v_title = [];
for sentence in tqdm(Donor_train['project_title']): # for each review/sentence
    vector = np.zeros(300) # as word vectors are of zero length
    tf_idf_weight = 0; # num of words with a valid vector in the sentence/review
    for word in sentence.split(): # for each word in a review/sentence
        if (word in glove_words) and (word in tfidf_words):
            vec = model[word] # getting the vector for each word
            tf_idf = dictionary[word]*(sentence.count(word)/len(sentence.split())) # getting the tf
idf value for each word
            vector += (vec * tf_idf) # calculating tfidf weighted w2v
            tf_idf_weight += tf_idf
    if tf_idf_weight != 0:
        vector /= tf_idf_weight
    Donor_train_tfidf_w2v_title.append(vector)

print(len(Donor_train_tfidf_w2v_title))
print(len(Donor_train_tfidf_w2v_title[0]))

Donor_cv_tfidf_w2v_title = [];
for sentence in tqdm(Donor_cv['project_title']): # for each review/sentence
    vector = np.zeros(300) # as word vectors are of zero length
    tf_idf_weight = 0; # num of words with a valid vector in the sentence/review
    for word in sentence.split(): # for each word in a review/sentence
        if (word in glove_words) and (word in tfidf_words):
            vec = model[word] # getting the vector for each word
            tf_idf = dictionary[word]*(sentence.count(word)/len(sentence.split())) # getting the tf
idf value for each word
            vector += (vec * tf_idf) # calculating tfidf weighted w2v
            tf_idf_weight += tf_idf
    if tf_idf_weight != 0:
        vector /= tf_idf_weight
    Donor_cv_tfidf_w2v_title.append(vector)

print(len(Donor_cv_tfidf_w2v_title))
print(len(Donor_cv_tfidf_w2v_title[0]))

Donor_test_tfidf_w2v_title = [];
for sentence in tqdm(Donor_test['project_title']): # for each review/sentence
    vector = np.zeros(300) # as word vectors are of zero length
    tf_idf_weight = 0; # num of words with a valid vector in the sentence/review
    for word in sentence.split(): # for each word in a review/sentence
        if (word in glove_words) and (word in tfidf_words):
            vec = model[word] # getting the vector for each word
            tf_idf = dictionary[word]*(sentence.count(word)/len(sentence.split())) # getting the tf
idf value for each word
            vector += (vec * tf_idf) # calculating tfidf weighted w2v
            tf_idf_weight += tf_idf
    if tf_idf_weight != 0:
        vector /= tf_idf_weight
    Donor_test_tfidf_w2v_title.append(vector)

print(len(Donor_test_tfidf_w2v_title))

```

```
100%|██████████████████████████████████████████████████████████████████████████████| 49041/49041  
[00:00<00:00, 73943.03it/s]
```

```
100%|██████████████████████████████████████████████████████████████████████████| 24155/24155  
[00:00<00:00, 123576.45it/s]
```

```
100%|██████████████████████████████████████████████████████████████████████████████| 36052/36052  
[00:00<00:00, 156365.77it/s]
```

## 2.4 Applying KNN on different kind of featurization as mentioned in the instructions

```
# please write all the code with proper documentation, and proper titles for each subsection
# go through documentations and blogs before you start coding
# first figure out what to do, and then think about how to do.
# reading and understanding error messages will be very much helpfull in debugging your code

# when you plot any graph make sure you use
# a. Title, that describes your plot, this will be very helpful to the reader
# b. Legends if needed
# c. X-axis label
# d. Y-axis label
```

### 2.4.1 Applying KNN brute force on BOW, SET 1

```
# merge two sparse matrices: https://stackoverflow.com/a/19710648/4084039
# Using sample solution code

from scipy.sparse import hstack

Donor_tr = hstack((Donor_train_essay_bow, Donor_train_title_bow, Donor_train_state_oh,
Donor_train_teacher_oh, Donor_train_grade_oh,
Donor_train_clean_cat_oh, Donor_train_clean_subcat_oh, Donor_train_price_norm, Donor_train_postedCount_norm, Donor_train_quantity_norm)).tocsr()

Donor_cr = hstack((Donor_cv_essay_bow, Donor_cv_title_bow, Donor_cv_state_oh, Donor_cv_teacher_oh,
Donor_cv_grade_oh,
Donor_cv_clean_cat_oh, Donor_cv_clean_subcat_oh, Donor_cv_price_norm, Donor_cv_postedCount_norm, Donor_cv_quantity_norm)).tocsr()

Donor_te = hstack((Donor_test_essay_bow, Donor_test_title_bow, Donor_test_state_oh,
Donor_test_teacher_oh, Donor_test_grade_oh, Donor_test_clean_cat_oh, Donor_test_clean_subcat_oh,
Donor_test_price_norm, Donor_test_postedCount_norm, Donor_test_quantity_norm)).tocsr()

print("Final Donor Data Matrix for Set 1")
print(Donor_tr.shape, Approved_train.shape)
print(Donor_cr.shape, Approved_cv.shape)
print(Donor_te.shape, Approved_test.shape)
print("=="*100)
```

```
Final Donor Data Matrix for Set 1
(49041, 8102) (49041,)
(24155, 8102) (24155,)
(36052, 8102) (36052,)
=====
```

## Applying KNN for Set 1

In [99]:

```
# Using Simple for loop from Sample solution code

def batch_predict(clf, data):
    # roc_auc_score(y_true, y_score) the 2nd parameter should be probability estimates of the positive class
    # not the predicted outputs

    y_data_pred = []
    tr_loop = data.shape[0] - data.shape[0]%1000
    # consider you X_tr shape is 49041, then your cr_loop will be 49041 - 49041%1000 = 49000
    # in this for loop we will iterate until the last 1000 multiplier
    for i in range(0, tr_loop, 1000):
        y_data_pred.extend(clf.predict_proba(data[i:i+1000])[:,1])
        # we will be predicting for the last data points
    y_data_pred.extend(clf.predict_proba(data[tr_loop:])[:,1])

    return y_data_pred
```

In [100]:

```
# Using Simple for loop from Sample solution code

import matplotlib.pyplot as plt
from sklearn.neighbors import KNeighborsClassifier
from sklearn.metrics import roc_auc_score
"""
y_true : array, shape = [n_samples] or [n_samples, n_classes]
True binary labels or binary label indicators.

y_score : array, shape = [n_samples] or [n_samples, n_classes]
Target scores, can either be probability estimates of the positive class, confidence values, or no
n-thresholded measure of
decisions (as returned by "decision_function" on some classifiers).
For binary y_true, y_score is supposed to be the score of the class with greater label.

"""

train_auc = []
cv_auc = []
K = [1, 5, 10, 18, 25, 33, 45, 51, 65, 101]
for i in K:
    neigh = KNeighborsClassifier(n_neighbors=i)
    neigh.fit(Donor_tr, Approved_train)

    Approved_train_pred = batch_predict(neigh, Donor_tr)
    Approved_cv_pred = batch_predict(neigh, Donor_cr)


    # roc_auc_score(y_true, y_score) the 2nd parameter should be probability estimates of the positive class
    # not the predicted outputs
    train_auc.append(roc_auc_score(Approved_train, Approved_train_pred))
    cv_auc.append(roc_auc_score(Approved_cv, Approved_cv_pred))

plt.plot(K, train_auc, label='Train AUC')
plt.plot(K, cv_auc, label='CV AUC')

plt.scatter(K, train_auc, label='Train AUC points')
plt.scatter(K, cv_auc, label='CV AUC points')

plt.legend()
```

```
plt.xlabel("K: hyperparameter")
plt.ylabel("AUC")
plt.title("ERROR PLOTS")
plt.grid()
plt.show()
```

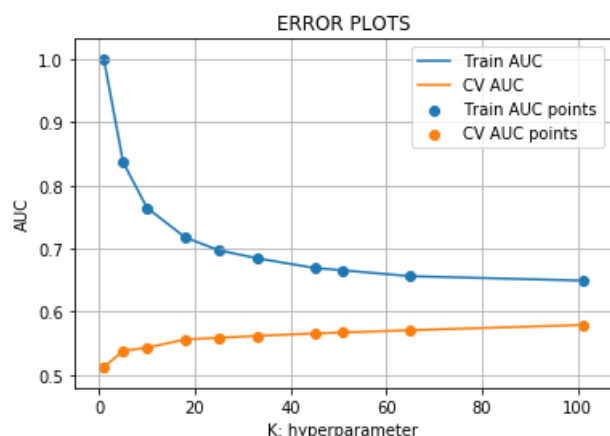

In [102]:

```
# From the error plot K is chosen such that, we will have maximum AUC on cv data and gap between
the train and cv is less
# Choosing the best_k based on for loop results


best_k = 51

from sklearn.metrics import roc_curve, auc
neigh = KNeighborsClassifier(n_neighbors=best_k)
neigh.fit(Donor_tr, Approved_train)
# roc_auc_score(y_true, y_score) the 2nd parameter should be probability estimates of the positive
class
# not the predicted outputs

Approved_train_pred = batch_predict(neigh, Donor_tr)
Approved_test_pred = batch_predict(neigh, Donor_te)

train_fpr, train_tpr, tr_thresholds = roc_curve(Approved_train, Approved_train_pred)
test_fpr, test_tpr, te_thresholds = roc_curve(Approved_test, Approved_test_pred)

plt.plot(train_fpr, train_tpr, label="train AUC =" + str(auc(train_fpr, train_tpr)))
plt.plot(test_fpr, test_tpr, label="test AUC =" + str(auc(test_fpr, test_tpr)))
plt.legend()
plt.xlabel("K: hyperparameter")
plt.ylabel("AUC")
plt.title("ERROR PLOTS")
plt.grid()
plt.show()
```

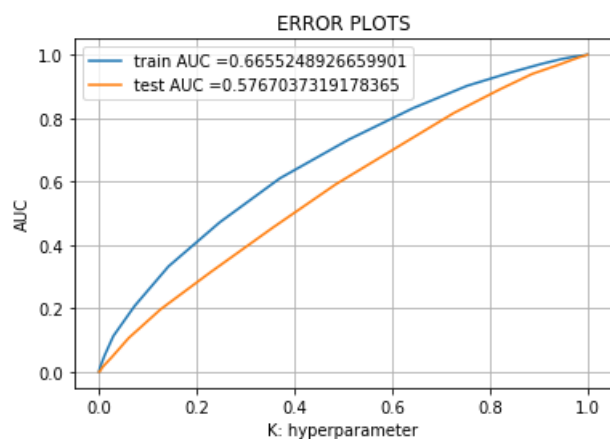

In [222]:

```
# we are writing our own function for predict, with defined threshold
# we will pick a threshold that will give the least for
```



```

# we will pick a threshold that will give the least fpr
def predict(proba, threshold, fpr, tpr):

    t = threshold[np.argmax(tpr*(1-fpr))]

    # (tpr*(1-fpr)) will be maximum if your fpr is very low and tpr is very high

    print("the maximum value of tpr*(1-fpr)", max(tpr*(1-fpr)), "for threshold", np.round(t,3))
    predictions = []
    for i in proba:
        if i>=t:
            predictions.append(1)
        else:
            predictions.append(0)
    return predictions

```

In [236]:

```

print("="*100)
from sklearn.metrics import confusion_matrix
print("Train confusion matrix")
print(confusion_matrix(Approved_train, predict(Approved_train_pred, tr_thresholds, train_fpr, train_fpr)))
print("Test confusion matrix")
print(confusion_matrix(Approved_test, predict(Approved_test_pred, tr_thresholds, test_fpr, test_fpr)))

```

```

=====

Train confusion matrix
the maximum value of tpr*(1-fpr) 0.24911432444612502 for threshold 0.845
[[ 4131  3295]
 [23457 18158]]
Test confusion matrix
the maximum value of tpr*(1-fpr) 0.24824795111225814 for threshold 0.873
[[ 3813  1646]
 [21371  9222]]

```

In [237]:

```

print("Train confusion matrix")
donor_SET2_cm = pd.DataFrame(confusion_matrix(Approved_train, predict(Approved_train_pred, tr_thresholds, train_fpr, train_fpr)))
donor_SET2_cm.columns = ['Predicted NO', 'Predicted YES']
donor_SET2_cm = donor_SET2_cm.rename({0: 'Actual NO', 1: 'Actual YES'})
sns.set(font_scale=1.4)#for label size
sns.heatmap(donor_SET2_cm, annot=True,annot_kws={"size": 16}, fmt='g')

```


```

Train confusion matrix
the maximum value of tpr*(1-fpr) 0.24911432444612502 for threshold 0.845

```

Out[237]:

<matplotlib.axes.\_subplots.AxesSubplot at 0x13c2f069a90>

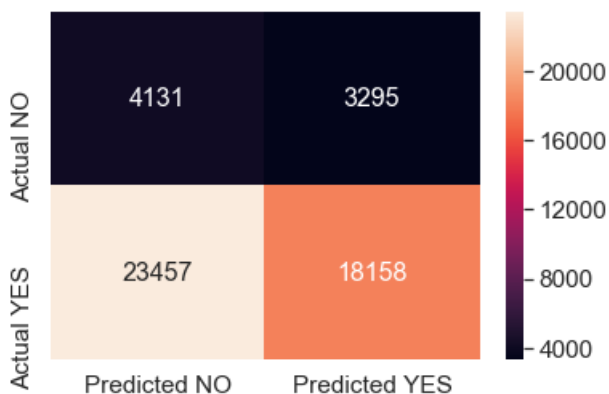

In [238]:

In [200]:


```
print("Test confusion matrix")
donor_SET2_cm = pd.DataFrame(confusion_matrix(Approved_test, predict(Approved_test_pred,
tr_thresholds, test_fpr, test_fpr)))
donor_SET2_cm.columns = ['Predicted NO', 'Predicted YES']
donor_SET2_cm = donor_SET2_cm.rename({0: 'Actual NO', 1: 'Actual YES'})
sns.set(font_scale=1.4)#for label size
sns.heatmap(donor_SET2_cm, annot=True,annot_kws={"size": 16}, fmt='g')
```

Test confusion matrix

the maximum value of  $tpr \cdot (1 - fpr)$  0.24824795111225814 for threshold 0.873

Out[238]:

<matplotlib.axes.\_subplots.AxesSubplot at 0x13be3ae6518>

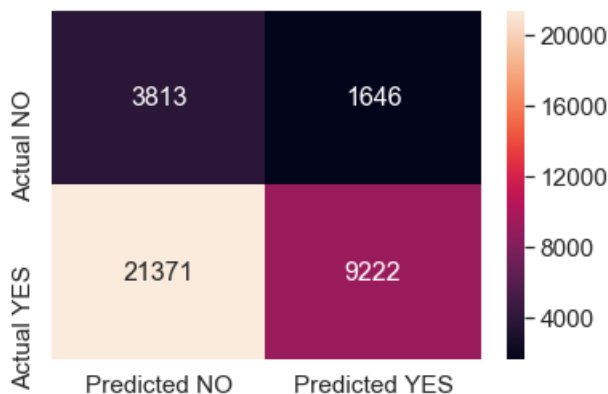

## 2.4.2 Applying KNN brute force on TFIDF, SET 2

Set 2: categorical, numerical features + project\_title(TFIDF)+ preprocessed\_essay (TFIDF)

In [209]:

```
# Using sample solution code

from scipy.sparse import hstack
Donor_tr_tfidf = hstack((Donor_train_essay_tfidf, Donor_train_title_tfidf, Donor_train_state_ohe,
Donor_train_teacher_ohe, Donor_train_grade_ohe,
Donor_train_clean_cat_ohe, Donor_train_clean_subcat_ohe, Donor_train_price_norm, Donor_train_postedCount_norm,
Donor_train_quantity_norm)).tocsr()
Donor_cr_tfidf = hstack((Donor_cv_essay_tfidf, Donor_cv_title_tfidf, Donor_cv_state_ohe,
Donor_cv_teacher_ohe, Donor_cv_grade_ohe,
Donor_cv_clean_cat_ohe, Donor_cv_clean_subcat_ohe, Donor_cv_price_norm, Donor_cv_postedCount_norm,
Donor_cv_quantity_norm)).tocsr()
Donor_te_tfidf = hstack((Donor_test_essay_tfidf, Donor_test_title_tfidf, Donor_test_state_ohe,
Donor_test_teacher_ohe, Donor_test_grade_ohe, Donor_test_clean_cat_ohe, Donor_test_clean_subcat_ohe,
Donor_test_price_norm, Donor_test_postedCount_norm, Donor_test_quantity_norm)).tocsr()

print("Final Donor Data Matrix for Set 2")
print(Donor_tr_tfidf.shape, Approved_train.shape)
print(Donor_cr_tfidf.shape, Approved_cv.shape)
print(Donor_te_tfidf.shape, Approved_test.shape)
print("="*100)
```

Final Donor Data Matrix for Set 2

(49041, 8102) (49041,)  
(24155, 8102) (24155,)  
(36052, 8102) (36052,)

## Applying KNN for Set 2

In [111]:

```
## [111]:
```

```
train_auc_tfidsf = []
cv_auc_tfidsf = []
K = [1, 15, 25, 51, 75, 100]
for i in K:
    neigh = KNeighborsClassifier(n_neighbors=i)
    neigh.fit(Donor_tr_tfidsf, Approved_train)


    Approved_train_tfidsf_pred = batch_predict(neigh, Donor_tr_tfidsf)
    Approved_cv_tfidsf_pred = batch_predict(neigh, Donor_cv_tfidsf)

    # roc_auc_score(y_true, y_score) the 2nd parameter should be probability estimates of the positive class
    # not the predicted outputs
    train_auc_tfidsf.append(roc_auc_score(Approved_train, Approved_train_tfidsf_pred))
    cv_auc_tfidsf.append(roc_auc_score(Approved_cv, Approved_cv_tfidsf_pred))

plt.plot(K, train_auc_tfidsf, label='Train AUC Set 2')
plt.plot(K, cv_auc_tfidsf, label='CV AUC Set 2')

plt.scatter(K, train_auc_tfidsf, label='Train AUC points')
plt.scatter(K, cv_auc_tfidsf, label='CV AUC points')

plt.legend()
plt.xlabel("K: hyperparameter")
plt.ylabel("AUC")
plt.title("ERROR PLOTS for Set 2")
plt.grid()
plt.show()
```

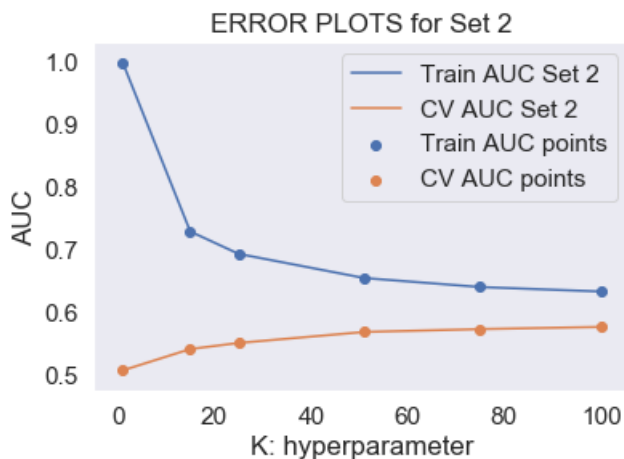

```
In [113]:
```

```
# From the error plot K is choosen such that, we will have maximum AUC on cv data and gap between
the train and cv is less
# Choosing the best_k based on for loop results

best_k = 51


from sklearn.metrics import roc_curve, auc
neigh = KNeighborsClassifier(n_neighbors=best_k)
neigh.fit(Donor_tr_tfidsf, Approved_train)
# roc_auc_score(y_true, y_score) the 2nd parameter should be probability estimates of the positive
class
# not the predicted outputs

Approved_train_tfidsf_pred = batch_predict(neigh, Donor_tr_tfidsf)
Approved_test_tfidsf_pred = batch_predict(neigh, Donor_te_tfidsf)

train_fpr, train_tpr, tr_thresholds = roc_curve(Approved_train, Approved_train_tfidsf_pred)
test_fpr, test_tpr, te_thresholds = roc_curve(Approved_test, Approved_test_tfidsf_pred)

plt.plot(train_fpr, train_tpr, label="train AUC =" + str(auc(train_fpr, train_tpr)))
plt.plot(test_fpr, test_tpr, label="test AUC =" + str(auc(test_fpr, test_tpr)))
plt.plot([0, 1], [0, 1], linestyle='--')
plt.legend()
plt.xlabel("K: hyperparameter")
plt.ylabel("AUC")
```

```
plt.title("ERROR PLOTS 2")
plt.grid()
plt.show()
```

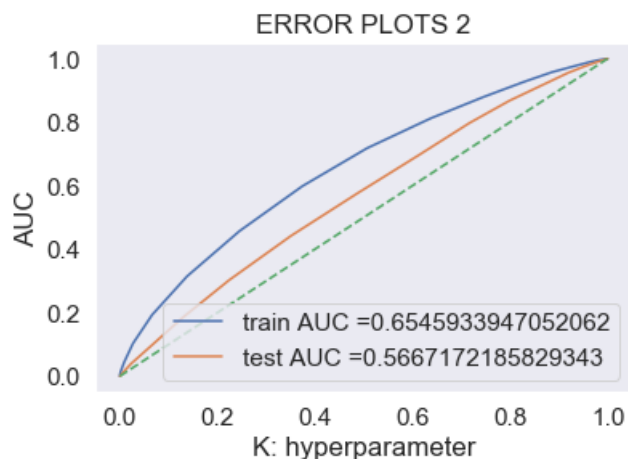

In [232]:

```
print("="*100)
from sklearn.metrics import confusion_matrix
print("Train confusion matrix")
print(confusion_matrix(Approved_train, predict(Approved_train_tfidf_pred, tr_thresholds, train_fpr
, train_fpr)))
print("Test confusion matrix")
print(confusion_matrix(Approved_test, predict(Approved_test_tfidf_pred, tr_thresholds, test_fpr, te
st_fpr)))
```

```
=====

Train confusion matrix
the maximum value of tpr*(1-fpr) 0.24911432444612502 for threshold 0.845
[[ 3234  4192]
 [18135 23480]]
Test confusion matrix
the maximum value of tpr*(1-fpr) 0.24824795111225814 for threshold 0.873
[[ 3111  2348]
 [17494 13099]]
```


In [234]:


```
print("Train confusion matrix")
donor_SET2_cm = pd.DataFrame(confusion_matrix(Approved_train, predict(Approved_train_tfidf_pred,
tr_thresholds, train_fpr, train_fpr)))
donor_SET2_cm.columns = ['Predicted NO', 'Predicted YES']
donor_SET2_cm = donor_SET2_cm.rename({0: 'Actual NO', 1: 'Actual YES'})
sns.set(font_scale=1.4)#for label size
sns.heatmap(donor_SET2_cm, annot=True,annot_kws={"size": 16}, fmt='g')
```

```
Train confusion matrix
the maximum value of tpr*(1-fpr) 0.24911432444612502 for threshold 0.845
```

Out[234]:

<matplotlib.axes.\_subplots.AxesSubplot at 0x13bd82e24a8>

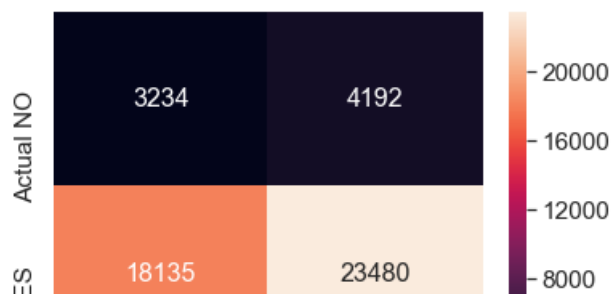



In [235]:


```
print("Test confusion matrix")
donor_SET2_cm = pd.DataFrame(confusion_matrix(Approved_test, predict(Approved_test_tfidf_pred,
tr_thresholds, test_fpr, test_fpr)))
donor_SET2_cm.columns = ['Predicted NO', 'Predicted YES']
donor_SET2_cm = donor_SET2_cm.rename({0: 'Actual NO', 1: 'Actual YES'})
sns.set(font_scale=1.4) #for label size
sns.heatmap(donor_SET2_cm, annot=True, annot_kws={"size": 16}, fmt='g')
```

Test confusion matrix

the maximum value of  $tpr \cdot (1 - fpr)$  0.24824795111225814 for threshold 0.873

Out[235]:

<matplotlib.axes.\_subplots.AxesSubplot at 0x13bfd09bf60>

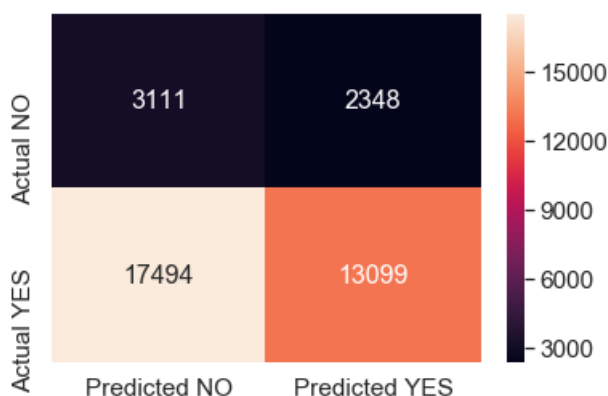

### 2.4.3 Applying KNN brute force on AVG W2V, SET 3

Set 3: categorical, numerical features + project\_title(AVG W2V)+ preprocessed\_essay (AVG W2V)

In [120]:

```
from scipy.sparse import hstack
Donor_tr_AvgW2V = hstack((avg_w2v_vectors_train_essays, avg_w2v_vectors_train_title,
Donor_train_state_ohe, Donor_train_teacher_ohe, Donor_train_grade_ohe, Donor_train_clean_cat_ohe,
Donor_train_clean_subcat_ohe, Donor_train_price_norm, Donor_train_postedCount_norm, Donor_train_quantity_norm)).tocsr()
Donor_cr_AvgW2V = hstack((avg_w2v_vectors_cv_essays, avg_w2v_vectors_cv_title, Donor_cv_state_ohe,
Donor_cv_teacher_ohe, Donor_cv_grade_ohe,
Donor_cv_clean_cat_ohe, Donor_cv_clean_subcat_ohe, Donor_cv_price_norm, Donor_cv_postedCount_norm, Donor_cv_quantity_norm)).tocsr()
Donor_te_AvgW2V = hstack((avg_w2v_vectors_test_essays, avg_w2v_vectors_test_title,
Donor_test_state_ohe, Donor_test_teacher_ohe, Donor_test_grade_ohe,
Donor_test_clean_cat_ohe, Donor_test_clean_subcat_ohe, Donor_test_price_norm, Donor_test_postedCount_norm, Donor_test_quantity_norm)).tocsr()

print("Final Donor Data Matrix for Set 2")
print(Donor_tr_AvgW2V.shape, Approved_train.shape)
print(Donor_cr_AvgW2V.shape, Approved_cv.shape)
print(Donor_te_AvgW2V.shape, Approved_test.shape)
print("="*100)
```

Final Donor Data Matrix for Set 2

```
(49041, 702) (49041,)
(24155, 702) (24155,)
(36052, 702) (36052,)
```

=====

In [122]:

```
train_auc_AvgW2V = []
cv_auc_AvgW2V = []
K = [1, 25, 51, 75, 100]
for i in K:
    neigh = KNeighborsClassifier(n_neighbors=i)
    neigh.fit(Donor_tr_AvgW2V, Approved_train)


    Approved_train_AvgW2V_pred = batch_predict(neigh, Donor_tr_AvgW2V)
    Approved_cv_AvgW2V_pred = batch_predict(neigh, Donor_cr_AvgW2V)

    # roc_auc_score(y_true, y_score) the 2nd parameter should be probability estimates of the posi
    tive class
    # not the predicted outputs
    train_auc_AvgW2V.append(roc_auc_score(Approved_train, Approved_train_AvgW2V_pred))
    cv_auc_AvgW2V.append(roc_auc_score(Approved_cv, Approved_cv_AvgW2V_pred))

plt.plot(K, train_auc_AvgW2V, label='Train AUC Set 3')
plt.plot(K, cv_auc_AvgW2V, label='CV AUC Set 3')

plt.scatter(K, train_auc_AvgW2V, label='Train AUC points')
plt.scatter(K, cv_auc_AvgW2V, label='CV AUC points')

plt.legend()
plt.xlabel("K: hyperparameter")
plt.ylabel("AUC")
plt.title("ERROR PLOTS for Set 3")
plt.grid()
plt.show()
```

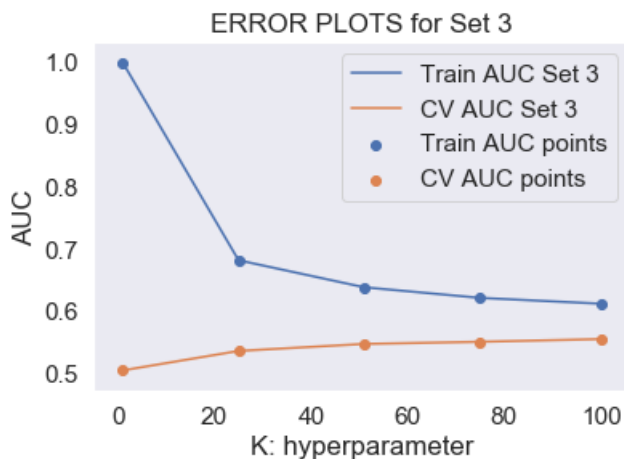

In [123]:

```
# From the error plot K is choosen such that, we will have maximum AUC on cv data and gap between
the train and cv is less
# Choosing the best_k based on for loop results

best_k = 51


from sklearn.metrics import roc_curve, auc
neigh = KNeighborsClassifier(n_neighbors=best_k)
neigh.fit(Donor_tr_AvgW2V, Approved_train)
# roc_auc_score(y_true, y_score) the 2nd parameter should be probability estimates of the positive
class
# not the predicted outputs

Approved_train_AvgW2V_pred = batch_predict(neigh, Donor_tr_AvgW2V)
Approved_test_AvgW2V_pred = batch_predict(neigh, Donor_te_AvgW2V)

train_fpr, train_tpr, tr_thresholds = roc_curve(Approved_train, Approved_train_AvgW2V_pred)
test_fpr, test_tpr, te_thresholds = roc_curve(Approved_test, Approved_test_AvgW2V_pred)

plt.plot(train_fpr, train_tpr, label="train AUC =" + str(auc(train_fpr, train_tpr)))
plt.plot(test_fpr, test_tpr, label="test AUC =" + str(auc(test_fpr, test_tpr)))
plt.plot([0, 1], [0, 1], linestyle='--')
plt.legend()
```

```
plt.xlabel("K: hyperparameter")
plt.ylabel("AUC")
plt.title("ERROR PLOTS 3")
plt.grid()
plt.show()
```

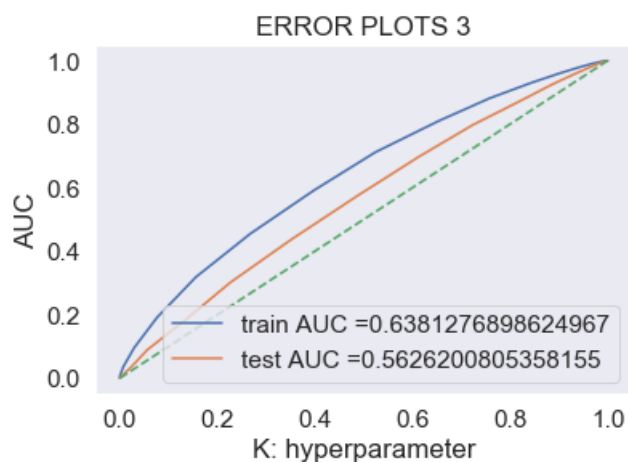

In [229]:

```
print("="*100)
from sklearn.metrics import confusion_matrix
print("Train confusion matrix")
print(confusion_matrix(Approved_train, predict(Approved_train_AvgW2V_pred, tr_thresholds,
train_fpr, train_fpr)))
print("Test confusion matrix")
print(confusion_matrix(Approved_test, predict(Approved_test_AvgW2V_pred, tr_thresholds, test_fpr, t
est_fpr)))
```

```
=====

Train confusion matrix
the maximum value of tpr*(1-fpr) 0.24911432444612502 for threshold 0.845
[[ 3230  4196]
 [18257 23358]]
Test confusion matrix
the maximum value of tpr*(1-fpr) 0.24824795111225814 for threshold 0.873
[[ 3171  2288]
 [17607 12986]]
```


In [230]:

```
print("Train confusion matrix")
donor_SET2_cm = pd.DataFrame(confusion_matrix(Approved_train, predict(Approved_train_AvgW2V_pred, t
r_thresholds, train_fpr, train_fpr)))
donor_SET2_cm.columns = ['Predicted NO', 'Predicted YES']
donor_SET2_cm = donor_SET2_cm.rename({0: 'Actual NO', 1: 'Actual YES'})
sns.set(font_scale=1.4)#for label size
sns.heatmap(donor_SET2_cm, annot=True,annot_kws={"size": 16}, fmt='g')
```


```
Train confusion matrix
the maximum value of tpr*(1-fpr) 0.24911432444612502 for threshold 0.845
```

Out[230]:

<matplotlib.axes.\_subplots.AxesSubplot at 0x13beffd9160>

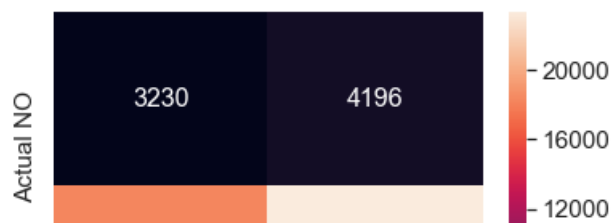



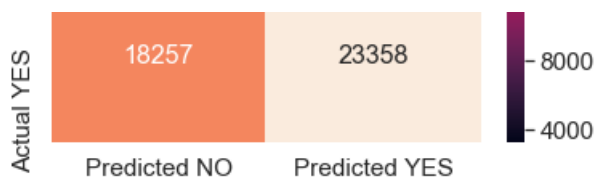


In [231]:

```
print("Test confusion matrix")
donor_SET2_cm = pd.DataFrame(confusion_matrix(Approved_test, predict(Approved_test_AvgW2V_pred,
tr_thresholds, test_fpr, test_fpr)))
donor_SET2_cm.columns = ['Predicted NO', 'Predicted YES']
donor_SET2_cm = donor_SET2_cm.rename({0: 'Actual NO', 1: 'Actual YES'})
sns.set(font_scale=1.4) #for label size
sns.heatmap(donor_SET2_cm, annot=True, annot_kws={"size": 16}, fmt='g')
```

Test confusion matrix  
the maximum value of tpr\*(1-fpr) 0.24824795111225814 for threshold 0.873

Out[231]:

<matplotlib.axes.\_subplots.AxesSubplot at 0x13bf83e2940>

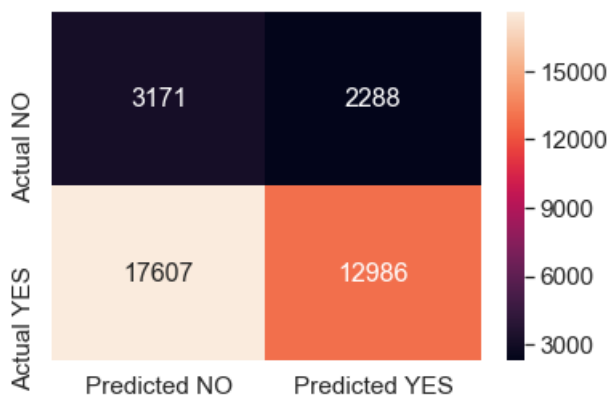

## 2.4.4 Applying KNN brute force on TFIDF W2V, SET 4

Set 4: categorical, numerical features + project\_title(TFIDF W2V)+ preprocessed\_essay (TFIDF W2V)

In [134]:

```
from scipy.sparse import hstack
Donor_tr_TFIDFW2V = hstack((Donor_train_tfidf_w2v_vectors, Donor_train_tfidf_w2v_title,
Donor_train_state_ohe, Donor_train_teacher_ohe, Donor_train_grade_ohe, Donor_train_clean_cat_ohe,
Donor_train_clean_subcat_ohe, Donor_train_price_norm, Donor_train_postedCount_norm, Donor_train_quantity_norm)).tocsr()
Donor_cr_TFIDFW2V = hstack((Donor_cv_tfidf_w2v_vectors, Donor_cv_tfidf_w2v_title,
Donor_cv_state_ohe, Donor_cv_teacher_ohe, Donor_cv_grade_ohe,
Donor_cv_clean_cat_ohe, Donor_cv_clean_subcat_ohe, Donor_cv_price_norm, Donor_cv_postedCount_norm, Donor_cv_quantity_norm)).tocsr()
Donor_te_TFIDFW2V = hstack((Donor_test_tfidf_w2v_vectors, Donor_test_tfidf_w2v_title,
Donor_test_state_ohe, Donor_test_teacher_ohe, Donor_test_grade_ohe,
Donor_test_clean_cat_ohe, Donor_test_clean_subcat_ohe, Donor_test_price_norm, Donor_test_postedCount_norm, Donor_test_quantity_norm)).tocsr()

print("Final Donor Data Matrix for Set 2")
print(Donor_tr_TFIDFW2V.shape, Approved_train.shape)
print(Donor_cr_TFIDFW2V.shape, Approved_cv.shape)
print(Donor_te_TFIDFW2V.shape, Approved_test.shape)
print("="*100)
```

Final Donor Data Matrix for Set 2  
(49041, 702) (49041,)  
(24155, 702) (24155,)  
(36052, 702) (36052,)

```
In [136]:
```

```
%%time
import matplotlib.pyplot as plt
from sklearn.neighbors import KNeighborsClassifier
from sklearn.metrics import roc_auc_score
"""
y_true : array, shape = [n_samples] or [n_samples, n_classes]
True binary labels or binary label indicators.

y_score : array, shape = [n_samples] or [n_samples, n_classes]
Target scores, can either be probability estimates of the positive class, confidence values, or no
n-thresholded measure of
decisions (as returned by "decision_function" on some classifiers).
For binary y_true, y_score is supposed to be the score of the class with greater label.

"""

TFIDFW2V_train_auc = []
TFIDFW2V_cv_auc = []
K = [1, 5, 25, 45, 51, 65, 101]
for i in K:
    neigh = KNeighborsClassifier(n_neighbors=i)
    neigh.fit(Donor_tr_TFIDFW2V, Approved_train)

    Approved_train_TFIDFW2V_pred = batch_predict(neigh, Donor_tr_TFIDFW2V)
    Approved_cv_TFIDFW2V_pred = batch_predict(neigh, Donor_cr_TFIDFW2V)


    # roc_auc_score(y_true, y_score) the 2nd parameter should be probability estimates of the posi
    # not the predicted outputs
    TFIDFW2V_train_auc.append(roc_auc_score(Approved_train, Approved_train_TFIDFW2V_pred))
    TFIDFW2V_cv_auc.append(roc_auc_score(Approved_cv, Approved_cv_TFIDFW2V_pred))

plt.plot(K, TFIDFW2V_train_auc, label='Train AUC')
plt.plot(K, TFIDFW2V_cv_auc, label='CV AUC')

plt.scatter(K, TFIDFW2V_train_auc, label='Train AUC points')
plt.scatter(K, TFIDFW2V_cv_auc, label='CV AUC points')

plt.legend()
plt.xlabel("K: hyperparameter")
plt.ylabel("AUC")
plt.title("ERROR PLOTS 4")
plt.grid()
plt.show()
```

ERROR PLOTS 4

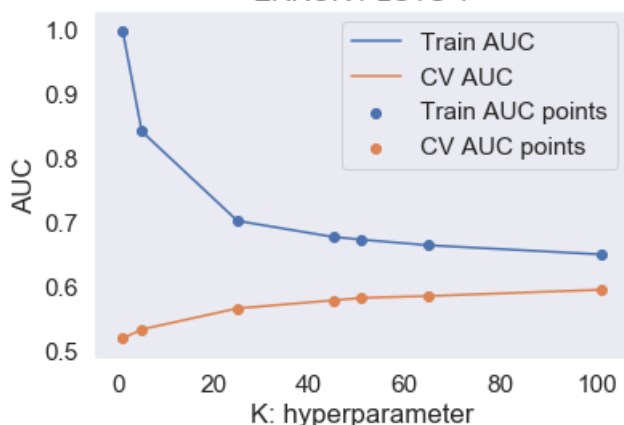

Wall time: 6h 59s

```
In [137]:
```

```
best_k = 51
```

```


from sklearn.metrics import roc_curve, auc
neigh = KNeighborsClassifier(n_neighbors=best_k)
neigh.fit(Donor_tr_TFIDFW2V, Approved_train)
# roc_auc_score(y_true, y_score) the 2nd parameter should be probability estimates of the positive
class
# not the predicted outputs

Approved_train_TFIDFW2V_pred = batch_predict(neigh, Donor_tr_TFIDFW2V)
Approved_test_TFIDFW2V_pred = batch_predict(neigh, Donor_te_TFIDFW2V)

train_fpr, train_tpr, tr_thresholds = roc_curve(Approved_train, Approved_train_TFIDFW2V_pred)
test_fpr, test_tpr, te_thresholds = roc_curve(Approved_test, Approved_test_TFIDFW2V_pred)

plt.plot(train_fpr, train_tpr, label="train AUC =" + str(auc(train_fpr, train_tpr)))
plt.plot(test_fpr, test_tpr, label="test AUC =" + str(auc(test_fpr, test_tpr)))
plt.plot([0, 1], [0, 1], linestyle='--')
plt.legend()
plt.xlabel("K: hyperparameter")
plt.ylabel("AUC")
plt.title("ERROR PLOTS 4")
plt.grid()
plt.show()

```

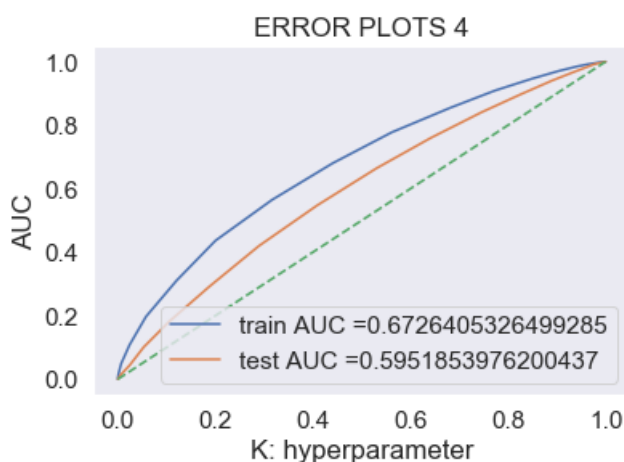

In [226]:

```

print("="*100)
from sklearn.metrics import confusion_matrix
print("Train confusion matrix")
print(confusion_matrix(Approved_train, predict(Approved_train_TFIDFW2V_pred, tr_thresholds,
train_fpr, train_fpr)))
print("Test confusion matrix")
print(confusion_matrix(Approved_test, predict(Approved_test_TFIDFW2V_pred, tr_thresholds, test_fpr
, test_fpr)))

```

```

=====

Train confusion matrix
the maximum value of tpr*(1-fpr) 0.249114324444612502 for threshold 0.845
[[ 3505  3921]
 [19690 21925]]
Test confusion matrix
the maximum value of tpr*(1-fpr) 0.24824795111225814 for threshold 0.873
[[ 3243  2216]
 [18384 12209]]

```

In [227]:

```


print("Train confusion matrix")
donor_SET2_cm = pd.DataFrame(confusion_matrix(Approved_train, predict(Approved_train_TFIDFW2V_pred
, tr_thresholds, train_fpr, train_fpr)))
donor_SET2_cm.columns = ['Predicted NO', 'Predicted YES']
donor_SET2_cm = donor_SET2_cm.rename({0: 'Actual NO', 1: 'Actual YES'})
sns.set(font_scale=1.4) #for label size
sns.heatmap(donor_SET2_cm, annot=True, annot_kws={"size": 16}, fmt='g')

```

Train confusion matrix  
the maximum value of  $tpr \cdot (1 - fpr)$  0.24911432444612502 for threshold 0.845

Out[227]:

<matplotlib.axes.\_subplots.AxesSubplot at 0x13bf190b710>

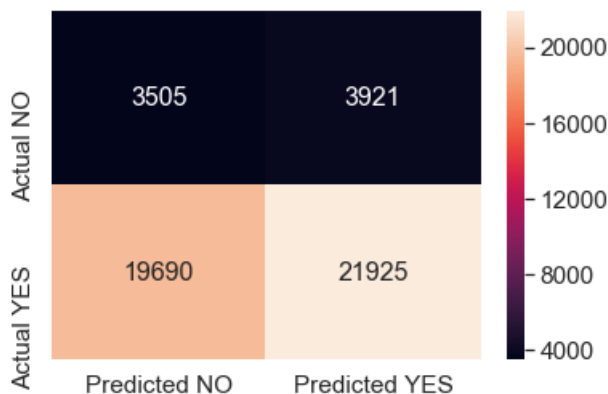


In [228]:

```
print("Test confusion matrix")
donor_SET2_cm = pd.DataFrame(confusion_matrix(Approved_test, predict(Approved_test_TFIDFW2V_pred,
tr_thresholds, test_fpr, test_fpr)))
donor_SET2_cm.columns = ['Predicted NO', 'Predicted YES']
donor_SET2_cm = donor_SET2_cm.rename({0: 'Actual NO', 1: 'Actual YES'})
sns.set(font_scale=1.4) #for label size
sns.heatmap(donor_SET2_cm, annot=True, annot_kws={"size": 16}, fmt='g')
```

Test confusion matrix  
the maximum value of  $tpr \cdot (1 - fpr)$  0.24824795111225814 for threshold 0.873

Out[228]:

<matplotlib.axes.\_subplots.AxesSubplot at 0x13bf3cc2e48>

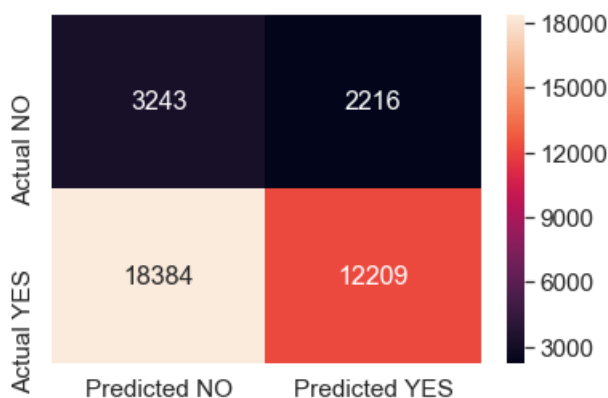

## 2.5 Feature selection with `SelectKBest`

In [162]:

```
# please write all the code with proper documentation, and proper titles for each subsection
# go through documentations and blogs before you start coding
# first figure out what to do, and then think about how to do.
# reading and understanding error messages will be very much helpfull in debugging your code

# when you plot any graph make sure you use
# a. Title, that describes your plot, this will be very helpful to the reader
# b. Legends if needed
# c. X-axis label
# d. Y-axis label
```

```
# SelectKBest from Set 2
# Source : https://www.programcreek.com/python/example/93974/sklearn.feature\_selection.SelectKBest
```

```
from sklearn.datasets import load_digits
from sklearn.feature_selection import SelectKBest, chi2

Donor_tr_tfidf_newtr = SelectKBest(chi2, k = 2000).fit_transform(Donor_tr_tfidf, Approved_train)
Donor_cr_tfidf_newtr = SelectKBest(chi2, k = 2000).fit_transform(Donor_cr_tfidf, Approved_cv)
Donor_te_tfidf_newtr = SelectKBest(chi2, k = 2000).fit_transform(Donor_te_tfidf, Approved_test)

print(Donor_tr_tfidf_newtr.shape)
print(Donor_cr_tfidf_newtr.shape)
print(Donor_te_tfidf_newtr.shape)
```

```
(49041, 2000)
(24155, 2000)
(36052, 2000)
```

In [164]:

```
%%time
SET2_train_auc = []
SET2_cv_auc = []
K = [1, 3, 5, 25, 49, 51, 61, 71, 101]
for i in K:
    neigh = KNeighborsClassifier(n_neighbors=i)
    neigh.fit(Donor_tr_tfidf_newtr, Approved_train)


    Approved_train_SET2_pred = batch_predict(neigh, Donor_tr_tfidf_newtr)
    Approved_cv_SET2_pred = batch_predict(neigh, Donor_cr_tfidf_newtr)

    # roc_auc_score(y_true, y_score) the 2nd parameter should be probability estimates of the posi
    tive class
    # not the predicted outputs
    SET2_train_auc.append(roc_auc_score(Approved_train, Approved_train_SET2_pred))
    SET2_cv_auc.append(roc_auc_score(Approved_cv, Approved_cv_SET2_pred))

plt.plot(K, SET2_train_auc, label='Train AUC')
plt.plot(K, SET2_cv_auc, label='CV AUC')

plt.scatter(K, SET2_train_auc, label='Train AUC points')
plt.scatter(K, SET2_cv_auc, label='CV AUC points')

plt.legend()
plt.xlabel("K: hyperparameter")
plt.ylabel("AUC")
plt.title("ERROR PLOTS Kbest")
plt.grid()
plt.show()
```

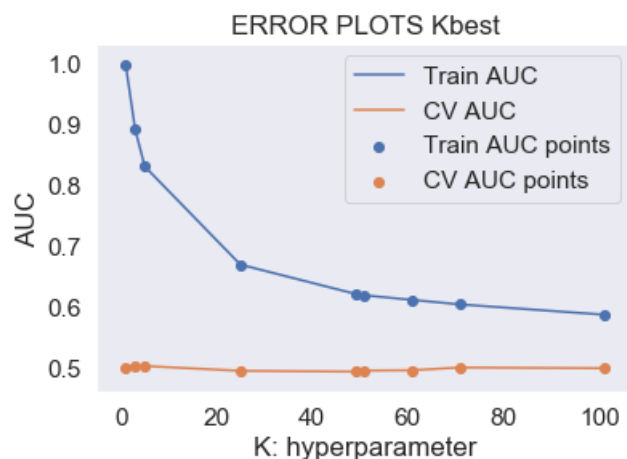

Wall time: 39min 27s

In [167]:

```

best_k = 71


from sklearn.metrics import roc_curve, auc
neighKBest = KNeighborsClassifier(n_neighbors=best_k)
neighKBest.fit(Donor_tr_tfidf_newtr, Approved_train)
# roc_auc_score(y_true, y_score) the 2nd parameter should be probability estimates of the positive
class
# not the predicted outputs

Approved_train_SET2_pred = batch_predict(neighKBest, Donor_tr_tfidf_newtr)
Approved_test_SET2_pred = batch_predict(neighKBest, Donor_te_tfidf_newtr)

train_fpr, train_tpr, tr_thresholds = roc_curve(Approved_train, Approved_train_SET2_pred)
test_fpr, test_tpr, te_thresholds = roc_curve(Approved_test, Approved_test_SET2_pred)

plt.plot(train_fpr, train_tpr, label="train AUC =" + str(auc(train_fpr, train_tpr)))
plt.plot(test_fpr, test_tpr, label="test AUC =" + str(auc(test_fpr, test_tpr)))
plt.plot([0, 1], [0, 1], linestyle='--')
plt.legend()
plt.xlabel("K: hyperparameter")
plt.ylabel("AUC")
plt.title("ERROR PLOTS KBest")
plt.grid()
plt.show()

```

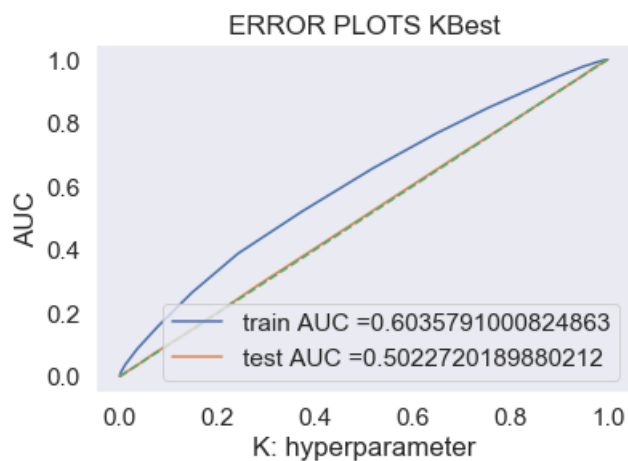

In [223]:

```

print("="*100)
from sklearn.metrics import confusion_matrix
print("Train confusion matrix")
print(confusion_matrix(Approved_train, predict(Approved_train_SET2_pred, tr_thresholds, train_fpr,
train_fpr)))
print("Test confusion matrix")
print(confusion_matrix(Approved_test, predict(Approved_test_SET2_pred, tr_thresholds, test_fpr, tes
t_fpr)))

```

```

=====

Train confusion matrix
the maximum value of tpr*(1-fpr) 0.24911432444612502 for threshold 0.845
[[ 3934  3492]
 [16384 25231]]
Test confusion matrix
the maximum value of tpr*(1-fpr) 0.24824795111225814 for threshold 0.873
[[ 3146  2313]
 [17526 13067]]

```

In [224]:

```

print("Train confusion matrix")
donor_SET2_cm = pd.DataFrame(confusion_matrix(Approved_train, predict(Approved_train_SET2_pred, tr_
thresholds, train_fpr, train_fpr)))
donor_SET2_cm.columns = ['Predicted NO', 'Predicted YES']
donor_SET2_cm = donor_SET2_cm.rename({0: 'Actual NO', 1: 'Actual YES'})
sns.set(font_scale=1.4)#for label size
sns.heatmap(donor_SET2_cm, annot=True, annot_kws={"size": 16}, fmt='g')


```

```
sns.heatmap(donor_SET2_cm, annot=True,annot_kws={"size": 16}, fmt='g')
```

Train confusion matrix  
the maximum value of  $tpr \cdot (1 - fpr)$  0.24911432444612502 for threshold 0.845

Out[224]:

<matplotlib.axes.\_subplots.AxesSubplot at 0x13b9c56a240>

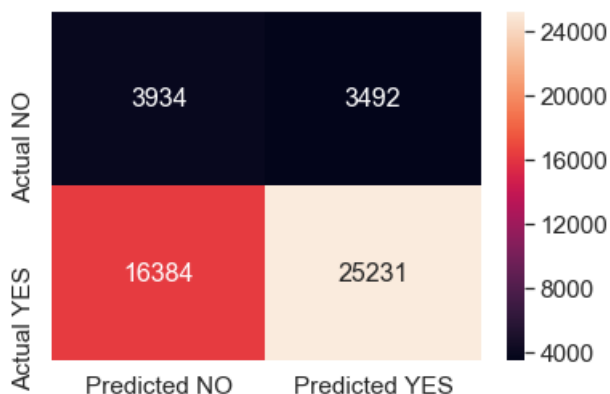


In [225]:

```
print("Test confusion matrix")
donor_SET2_cm = pd.DataFrame(confusion_matrix(Approved_test, predict(Approved_test_SET2_pred,
tr_thresholds, test_fpr, test_fpr)))
donor_SET2_cm.columns = ['Predicted NO', 'Predicted YES']
donor_SET2_cm = donor_SET2_cm.rename({0: 'Actual NO', 1: 'Actual YES'})
sns.set(font_scale=1.4)#for label size
sns.heatmap(donor_SET2_cm, annot=True,annot_kws={"size": 16}, fmt='g')
```

Test confusion matrix  
the maximum value of  $tpr \cdot (1 - fpr)$  0.24824795111225814 for threshold 0.873

Out[225]:

<matplotlib.axes.\_subplots.AxesSubplot at 0x13c5bf948d0>

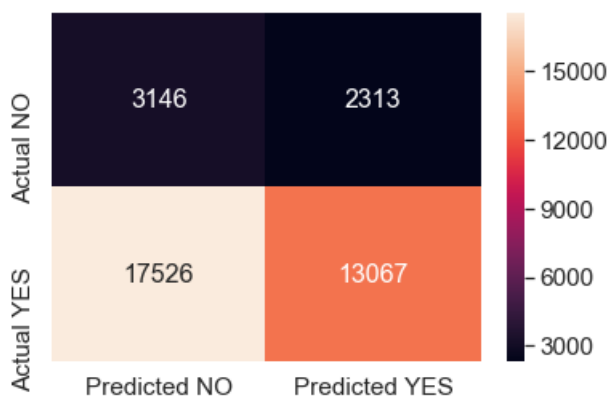

### 3. Conclusions

In [175]:

```
# Please compare all your models using Prettytable library

from prettytable import PrettyTable

x = PrettyTable()
x.field_names = ["Vectorizer", "Model", "Hyper Parameter", "Train AUC","Test AUC"]

x.add_row(["Set 1", "Brute", 51, 66.5 , 57.6])
```

```

x.add_row(["Set 2", "Brute", 51, 65.4 , 56.6])
x.add_row(["Set 3", "Brute", 51, 63.8 , 56.2])
x.add_row(["Set 4", "Brute", 51, 67.2 , 59.5])
x.add_row(["SelectKBest - Set 2", "Brute", 71, 60.3 , 50.2])

print(x)

```

Vectorizer	Model	Hyper Parameter	Train AUC	Test AUC
Set 1	Brute	51	66.5	57.6
Set 2	Brute	51	65.4	56.6
Set 3	Brute	51	63.8	56.2
Set 4	Brute	51	67.2	59.5
SelectKBest - Set 2	Brute	71	60.3	50.2