


PRACTICAL-01

AIM: To implementation and time analysis of sorting algorithms. Bubble sort, Selection Sort, Insertion sort, Merge sort and Quick sort.

1. BUBBLE SORT

ALGORITHM:

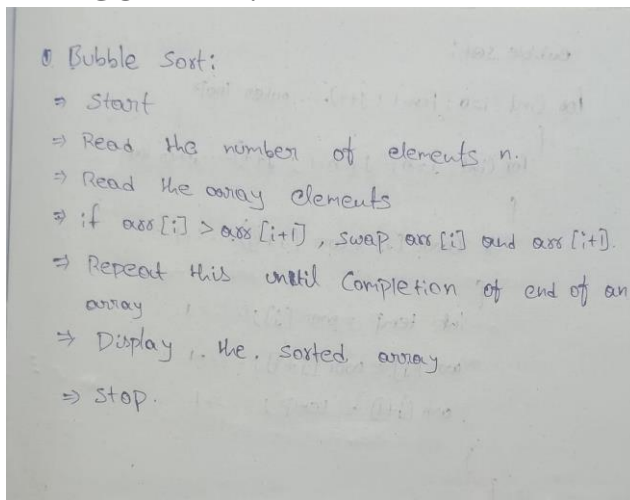

PROGRAM:

```
#include <iostream>
using namespace std;

void bubbleSort(int arr[], int n) {
    for (int i = 0; i < n - 1; i++) {
        for (int j = 0; j < n - i - 1; j++) {
            if (arr[j] > arr[j + 1]) {
                int temp = arr[j];
                arr[j] = arr[j + 1];
                arr[j + 1] = temp;
            }
        }
    }
}
```

```
}

int main() {
int n;

    cout << "Enter number of elements: ";
    cin >> n;

    int arr[n];
    cout << "Enter array elements: ";
    for (int i = 0; i < n; i++) {

        cin >> arr[i];
    }

    bubbleSort(arr, n);

    cout << "Sorted elements: ";
    for (int i = 0; i < n; i++) {

        cout << arr[i] << " ";
    }
    cout << endl;

    return 0;
}
```

OUTPUT:

```
Enter number of elements: 5
Enter array elements: 7
2
9
1
5
Sorted elements: 1 2 5 7 9
```

TIME COMPLEXITY:

Bubble sort:

```

for (int i=0; i<n-1; i++).... outer loop
{
    for (int j=0; j<n-1; j++).... inner loop
    {
        if (arr[j] > arr[j+1]).... 1
        {
            int temp = arr[j]; .... 1
            arr[j] = arr[j+1]; .... 1
            arr[j+1] = temp; .... 1
        }
    }
}
    
```

⇒ outer loop : Runs i=0 to n-1
so it executes n-1 times

⇒ Inner loop : Pass (i) iterations

0	n-1
1	n-2
⋮	⋮
n-2	1

$$(n-1) + (n-2) + \dots + 2 + 1 = 1 + 2 + 3 + \dots + (n-1) = \frac{n(n-1)}{2}$$

$$T(n) = n-1 + \frac{n^2-n}{2} + 1 + 1 + 1 + 1$$

$$= n + \frac{n^2-n}{2} + 3$$

$$= \frac{2n + n^2 - n + 6}{2} = \frac{n^2 + n + 6}{2}$$

ignore all constant asymptotic notation (∵ 6, 2)

$$= n^2 + n$$

$$T(n) = O(n^2) \text{ highest Power}$$

Bubble sort

Worst case:
Condition: Array is in descending order.

Process: Every comparison leads to swap

Comparisons: $(n-1) + (n-2) + \dots + 1 = \frac{n(n-1)}{2}$

$$\frac{n(n-1)}{2} = \frac{n^2-n}{2} = n^2 - n$$

Time complexity $O(n^2)$

Average case:
Condition: Array element are in random order

Process: About half of the comparisons leads to swap

Comparisons: still $\frac{n(n-1)}{2}$ Time complexity $= O(n^2)$


Best case:
Condition: Array is already sorted

Process: Comparisons occurs but no swaps

Time complexity: $O(n)$

SELECTION SORT:

ALGORITHM:

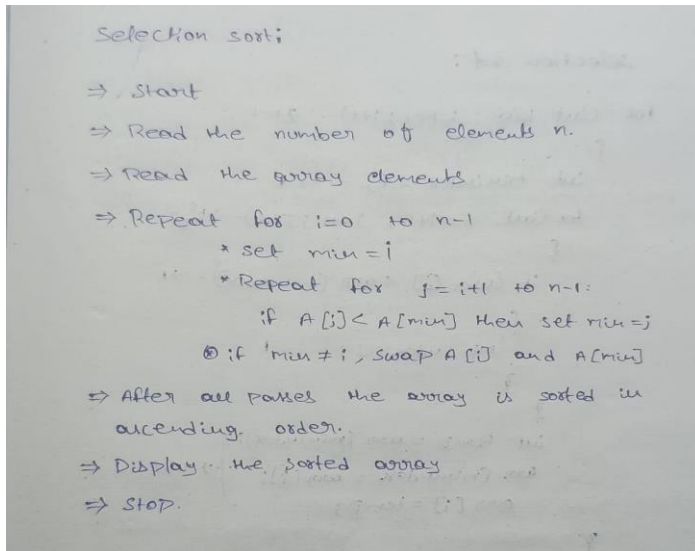

Selection sort;

- ⇒ Start
- ⇒ Read the number of elements n.
- ⇒ Read the array elements
- ⇒ Repeat for i=0 to n-1
 - * set min=i
 - * Repeat for j=i+1 to n-1:
 - if $A[i] < A[min]$ then set min=j
 - if min $\neq$ i, swap $A[i]$ and $A[min]$
- ⇒ After all passes the array is sorted in ascending order.
- ⇒ Display the sorted array
- ⇒ Stop.

PROGRAM:

```
#include <iostream>
```

```
using namespace std;
```

```
void selectionSort(int arr[], int n) {
```

```
    for (int i = 0; i < n - 1; i++) {
```

```
        int minIndex = i;
```

```
        for (int j = i + 1; j < n; j++) {
```

```
            if (arr[j] < arr[minIndex]) {
```

```
                minIndex = j;
```

```
            }
```

```
        }
```

```
        int temp = arr[minIndex];
```

```
        arr[minIndex] = arr[i];
```

```
        arr[i] = temp;
```

```
    }
```

```
}
```

```
int main() {
```

```
int n;

cout << "Enter number of elements: ";

cin >> n;

int arr[n];

cout << "Enter " << n << " elements: ";

for (int i = 0; i < n; i++) {
    cin >> arr[i];
}

cout << "Original array: ";

for (int i = 0; i < n; i++)
{
    cout << arr[i] << " ";
    cout << endl;
}

selectionSort(arr, n);

cout << "Sorted array: ";

for (int i = 0; i < n; i++)
{
    cout << arr[i] << " ";
//cout << endl;
}

return 0;
}
```

OUTPUT:

```
Enter number of elements: 5
Enter 5 elements: 9
2
4
6
0
Original array: 9
2
4
6
0
Sorted array: 0 2 4 6 9
```

TIME COMPLEXITY:

selection sort:

```
for (int i=0; i<n-1; i++) --> n-1
{
    int minIndex = i; --> 1
    for (int j=i+1; j<n; j++) -->  $\frac{n^2-n}{2}$ 
    {
        if (arr[j] < arr[minIndex]) --> 1
        {
            minIndex = j; --> 1
        }
    }
    int temp = arr[minIndex];
    arr[minIndex] = arr[i]; --> 1
    arr[i] = temp;
}
```

outer loop: The outer loop runs from $i=0$ to $n-1$
So it executes $n-1$ times

inner loop: Pass Comparisons

1	$n-1$	$(n-1) + (n-2) + (n-3) + \dots + 2 + 1$
2	$n-2$	
3	$n-3$	
$\vdots$	$\vdots$	
$n-1$	1	

$T(n) = \frac{n(n-1)}{2} = \frac{n^2-n}{2}$

$T(n) = n-1 + 1 + \frac{n^2-n}{2} + 1 + 1 + 1 + 1$
 $= n + \frac{n^2-n}{2} + 4 = 2n + \frac{n^2-n}{2} + 8$
 $= \frac{n^2}{2} + n + 8$
 $= n^2 + n$ ($\therefore$ by asymptotic notation avoid constants)

$T(n) = O(n^2)$ ($\therefore$ highest power)

selection sort:

worst case:

- Array is in descending order.
- For each position, the algorithm searches the entire unsorted part to find the minimum.
- Comparisons: $(n-1) + (n-2) + \dots + 1 = \frac{n(n-1)}{2}$
- Swaps: $n-1$
- Time complexity: $O(n^2)$

Average case:


- Array elements are in random order.
- Still scans the unsorted part fully for each position.
- Comparisons: same as worst case, $\frac{n(n-1)}{2}$
- Swaps: $n-1$
- Time complexity: $O(n^2)$

Best case:

- Array is already sorted.
- Even though no swaps are needed, the algorithm still scans as worst case, $\frac{n(n-1)}{2}$
- Swaps: 0
- Time complexity: $O(n^2)$

2.INSERTION SORT

ALGORITHM:

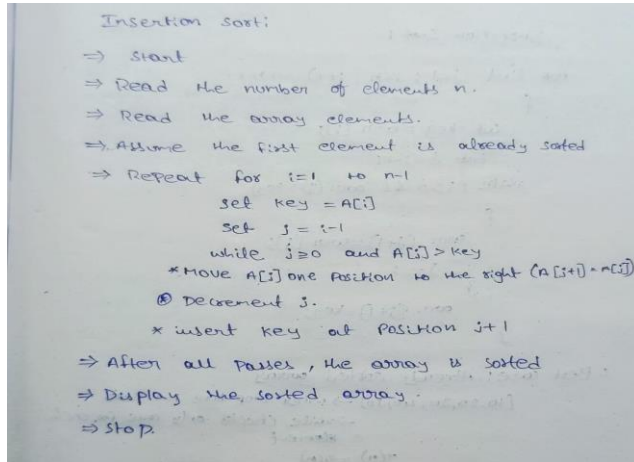

Insertion sort:

- ⇒ Start
- ⇒ Read the number of elements n.
- ⇒ Read the array elements.
- ⇒ Assume the first element is already sorted
- ⇒ Repeat for i=1 to n-1
 - set key = A[i]
 - set j = i-1
 - while j ≥ 0 and A[j] > key
 - * Move A[j] one position to the right (A[j+1] = A[j])
 - ① Decrement j.
 - * insert key at position j+1
- ⇒ After all passes, the array is sorted
- ⇒ Display the sorted array
- ⇒ stop

PROGRAM:

```
#include <iostream>
```

```
using namespace std;
```

```
void insertionSort(int arr[], int n) {  
    for (int i = 1; i < n; i++) {  
        int key = arr[i];  
        int j = i - 1;  
  
        while (j >= 0 && arr[j] > key) {  
            arr[j + 1] = arr[j];  
            j--;  
        }  
        arr[j + 1] = key;  
    }  
}
```

```
}
```

```
int main() {  
    int n;  
    cout << "Enter number of elements: ";  
    cin >> n;  
  
    int arr[n];  
    cout << "Enter " << n << " elements: ";  
    for (int i = 0; i < n; i++) {  
        cin >> arr[i];  
    }  
  
    cout << "Original array: ";  
    for (int i = 0; i < n; i++)  
    {  
        cout << arr[i] << " ";  
        cout << endl;  
    }  
    insertionSort(arr, n);  
  
    cout << "Sorted array: ";  
    for (int i = 0; i < n; i++)  
    {  
        cout << arr[i] << " ";  
        //cout << endl;  
    }  
    return 0;  
}
```


OUTPUT:

```
Enter number of elements: 5
Enter 5 elements: 7
3
8
2
0
Original array: 7
3
8
2
0
Sorted array: 0 2 3 7 8
```

TIME COMPLEXITY:

Insertion Sort:

```
for (int i=1; i<n; i++)---->n-1
{
    int key = arr[i];
    int j=i-1;
    while (j>0 && arr[j]>key)
    {
        arr[j+1]=arr[j];
        j--;
    }
    arr[j+1]=key;
}
```

1. Best case: Already sorted array
[10, 20, 30, 40, 50] → outer loop runs n-1 times
→ while checks only once for each element
 $T(n) = O(n)$

2. Worst case: Reverse sorted array
[50, 40, 30, 20, 10]
each new element must be compared with all previous elements and shifted

Pass	Comparison
1	1
2	2
3	3
⋮	⋮
n-1	n-1

$1+2+3+\dots+(n-1)$
 $T(n) = \frac{n(n-1)}{2} = \frac{n^2-n}{2}$
 $= O(n^2)$

Insertion sort:-


Worst case:-
 ⇒ Array is in descending order.
 ⇒ Each new element must be compared with all previously sorted elements and shifted.
 ⇒ Comparisons & shifts: $(n-1) + (n-2) + \dots + 1 = \frac{n(n-1)}{2}$
 ⇒ Time complexity: $O(n^2)$

Average case:-
 ⇒ Array elements are in random order
 ⇒ on average, each element is compared with half of the sorted portion.
 ⇒ Comparisons: About $\frac{n(n-1)}{4}$
 ⇒ Time complexity: $O(n^2)$

Best case:-
 ⇒ Array is already sorted
 ⇒ Each element is compared only once.
 (no shift needed).
 ⇒ Comparisons: n-1
 ⇒ Time complexity: $O(n)$

3. QUICK SORT

ALGORITHM:

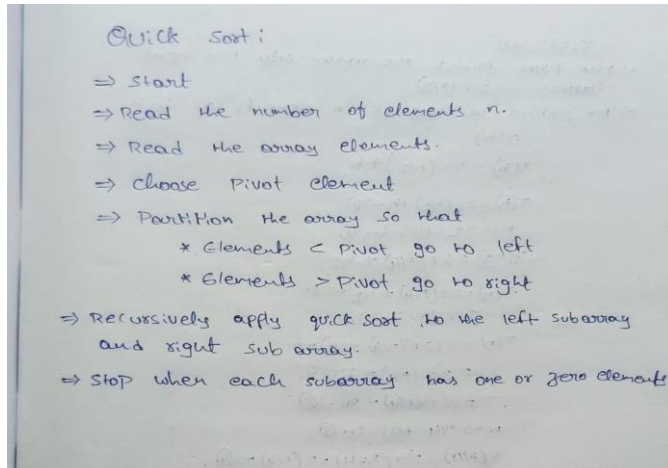

PROGRAM:

```
#include <iostream>
using namespace std;

int partition(int arr[], int lb, int ub) { int
    pivot = arr[lb];
    int start = lb; int
    end = ub;

    while (start < end) {
        while (arr[start] <= pivot ) {
            start++;
        }
        while (arr[end] > pivot) {
            end--;
```

```
}

    if (start < end) {
        swap(arr[start], arr[end]);
    }
}

swap(arr[lb], arr[end]);
return end;
}

void quickSort(int arr[], int lb, int ub) { if
    (lb < ub) {
        int loc = partition(arr, lb, ub);
        quickSort(arr, lb, loc - 1); quickSort(arr,
            loc + 1, ub);
    }
}

int main() {
    int n;

    cout << "Enter size of array: "; cin
    >> n;

    int arr[n];

    cout << "Enter " << n << " elements: "; for
    (int i = 0; i < n; i++) {
        cin >> arr[i];
    }
}
```

```
quickSort(arr, 0, n - 1);

cout << "Sorted array: "; for
(int i = 0; i < n; i++) { cout
    << arr[i] << " ";
}
return 0;
}
```

OUTPUT:

```
Enter size of array: 5
Enter 5 elements: 7
3
8
2
0
Sorted array: 0 2 3 7 8
```

TIME COMPLEXITY:

Quick sort:

⇒ The pivot divides the array into two equal halves → $2T(n/2)$

⇒ for sorting we ~~are~~ use n elements at last

$$O(n)$$

$$T(n) = 2T(n/2) + n$$

$$T(n) = 2T(n/2) + n \rightarrow \textcircled{1}$$

$$n \rightarrow n/2 \text{ put in } \textcircled{1}$$

$$T(n/2) = 2T(n/4) + n/2$$

$$T(n) = 2T(n/4) + n/2 \rightarrow \textcircled{2}$$

Sub $\textcircled{2}$ in $\textcircled{1}$

$$T(n) = 2(2T(n/4) + n/2) + n$$

$$= 2^2 T(n/4) + 2 \frac{n}{2} + n$$

$$= 2^2 T(n/4) + 2n \rightarrow \textcircled{3}$$

$$n \rightarrow n/4 \text{ put in } \textcircled{3}$$

$$T(n/4) = 2^2 T(n/8) + 2(n/4) \rightarrow \textcircled{4}$$

$\textcircled{4}$ in $\textcircled{3}$

$$T(n) = 2^2 [2^2 T(n/8) + \frac{2n}{4}] + 2n$$

$$= 2^4 T(n/8) + \frac{2^3 n}{4} + 2n$$

$$= 2^4 T(n/8) + 4n$$

$$T(n) = 2^k T(n/2^k) + kn$$

$$T(n) = 2^k T(n/2^k) + kn$$

$$\frac{n}{2^k} = 1$$

$$n = 2^k$$

Apply $\log$ both sides

$$\log n = \log 2^k$$

$$k = \log n$$

$$T(n) = 2^{\log n} T(n/2^{\log n}) + \log n (n)$$


$$= n^{\log 2} + \left(\frac{n}{n^{\log 2}} + \log n (n) \right)$$

$$= n^{\log 2} + n$$

$$T(n) = O(n \log n)$$

4.MERGE SORT

ALGORITHM:

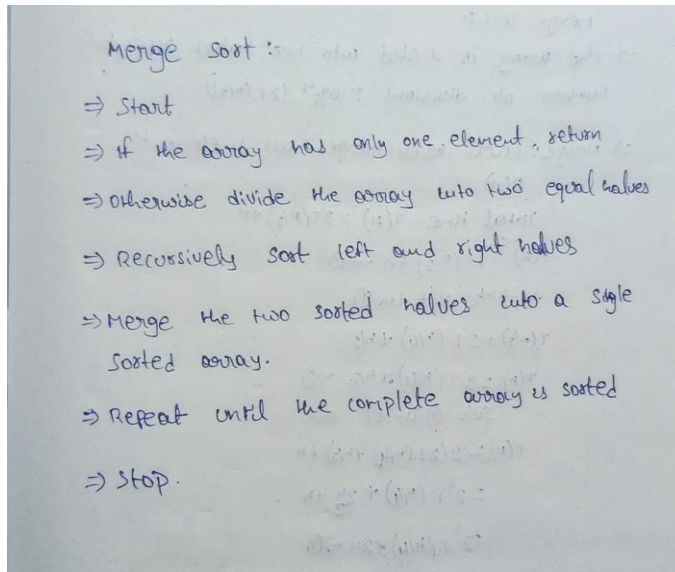

PROGRAM:

```
#include <iostream>

using namespace std;

void merge(int arr[], int left, int mid, int right) { int
    n1 = mid - left + 1;

    int n2 = right - mid;
    int L[n1], R[n2];

    for (int i = 0; i < n1; i++) L[i] = arr[left + i];
    for (int j = 0; j < n2; j++) R[j] = arr[mid + 1 + j];

    int i = 0, j = 0, k = left;
    while (i < n1 && j < n2) {
        if (L[i] <= R[j]) arr[k++] = L[i++]; else
            arr[k++] = R[j++];
    }
    while (i < n1) arr[k++] = L[i++];
    while (j < n2) arr[k++] = R[j++];
}

Y.sudheer kumar (924600118922)
```

```
void mergeSort(int arr[], int left, int right) {  
    if (left < right) {  
        int mid = left + (right - left) / 2;  
        mergeSort(arr, left, mid);  
        mergeSort(arr, mid + 1, right);  
        merge(arr, left, mid, right);  
    }  
}  
  
int main() { int  
    n;  
    cout << "Enter number of elements: "; cin  
    >> n;  
    int arr[n];  
    cout << "Enter elements: ";  
    for (int i = 0; i < n; i++) cin >> arr[i];  
  
    mergeSort(arr, 0, n - 1);  
  
    cout << "Sorted array: ";  
    for (int i = 0; i < n; i++) cout << arr[i] << " ";  
    return 0;  
}
```

OUTPUT:

```
Enter number of elements: 5  
Enter elements: 7  
9  
0  
2  
5  
Sorted array: 0 2 5 7 9
```


TIME COMPLEXITY:

merge sort:-
 $\Rightarrow$ the array is divided into two halves repeatedly
 number of divisions $\therefore \log_2 n$ ($2T(n/2)$)
 $\Rightarrow$ merge: each level merges all n elements
 $O(n)$
 Total time $T(n) = 2T(n/2) + n$
 $T(n) = 2T(n/2) + n \rightarrow \textcircled{1}$
 $n \rightarrow n/2$ put in $\textcircled{1}$
 $T(n/2) = 2T(n/4) + n/2$
 $T(n) = 2T(n/4) + n/2 \rightarrow \textcircled{2}$
 sub $\textcircled{2}$ in $\textcircled{1}$
 $T(n) = 2(2T(n/4) + n/2) + n$
 $= 2^2 T(n/4) + 2 \cdot \frac{n}{2} + n$
 $= 2^2 T(n/4) + 2n \rightarrow \textcircled{3}$
 $n \rightarrow n/4$ put in $\textcircled{3}$
 $T(n/4) = 2^2 T(n/8) + 2(n/4) \rightarrow \textcircled{4}$
 $\textcircled{4}$ in $\textcircled{3}$
 $T(n) = 2^2 (2^2 T(n/8) + 2 \cdot \frac{n}{4}) + 2n$
 $= 2^4 T(n/8) + 2 \cdot \frac{n}{4} + 2n$
 $= 2^4 T(n/8) + 4n$
 $T(n) = 2^k T(n/2^k) + kn$
 $T(n) = 2^k T(n/2^k) + kn$
 $\frac{n}{2^k} = 1$
 $n = 2^k$
 Apply log b.s
 $\log n = \log 2^k$
 $k = \log n$
 $T(n) = 2^{\log n} T(n/2^{\log n}) + (\log n)(n)$
 $= n^{\log 2} T\left(\frac{n}{n^{\log 2}}\right) + \log n(n)$
 $= n \log n + n$
 $T(n) = O(n \log n)$

CONCLUSION:

Bubble Sort and Selection Sort are simple but inefficient with $O(n^2)$ in all major cases. Insertion Sort improves to $O(n)$ in the best case when the array is already sorted. Quick Sort is very efficient on average with $O(n \log n)$, though it can degrade to $O(n^2)$. Merge Sort is consistently $O(n \log n)$ in all cases but requires extra space.

Y.sudheer kumar (924600118922)