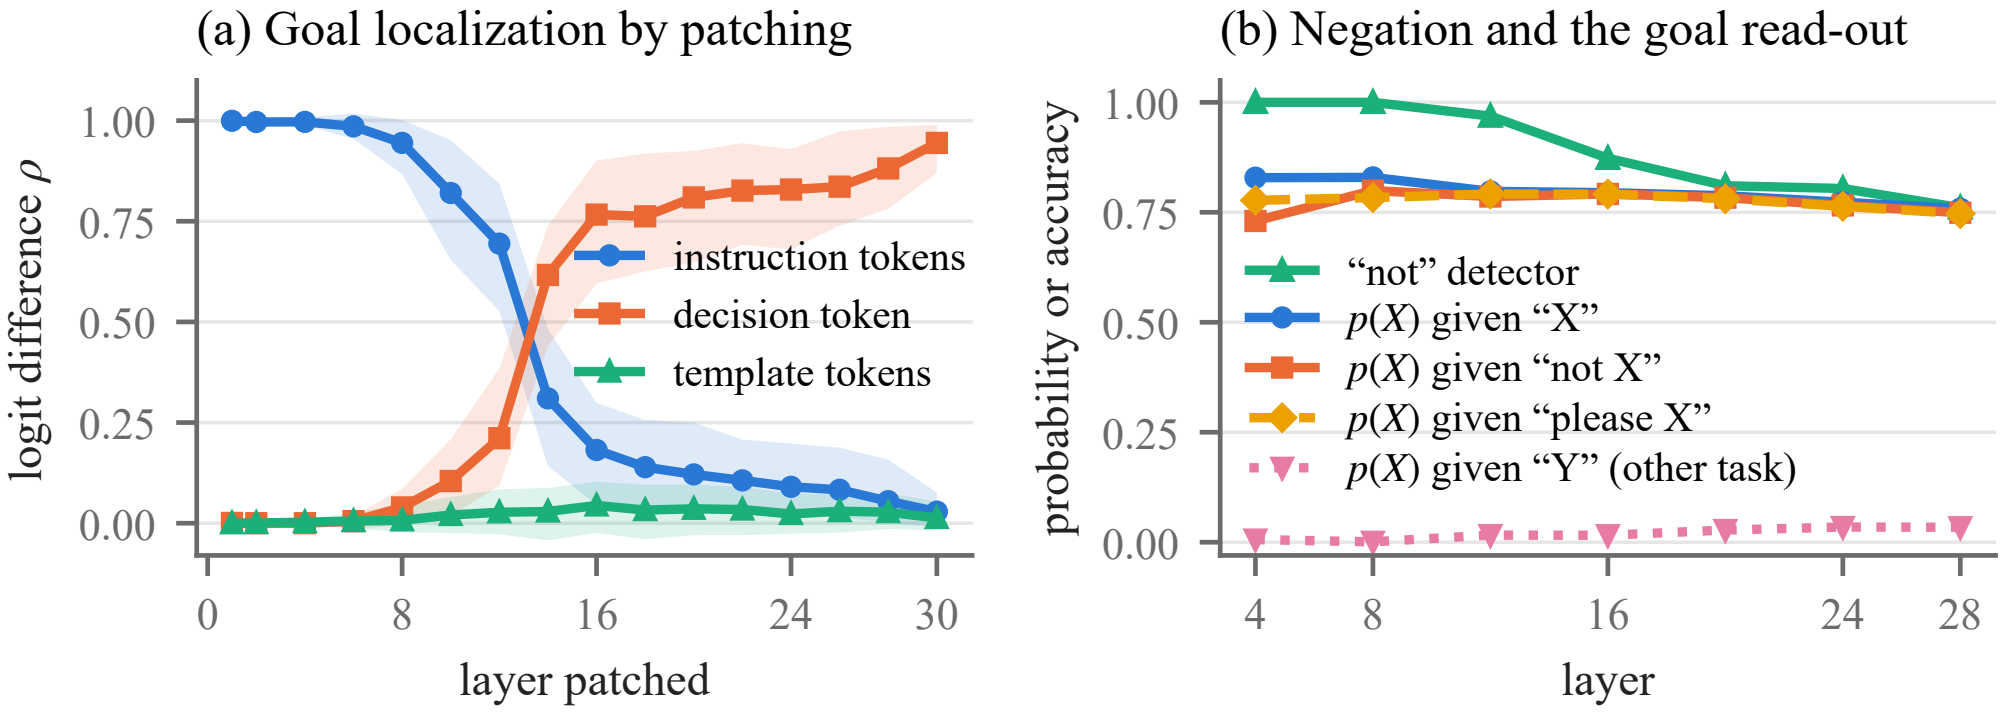
(a) Goal localization by patching
logit difference ρ
1.00
0.75
0.50
0.25
0.00
instruction tokens
decision token
template tokens
0
8
16
24
30
layer patched
(b) Negation and the goal read-out
probability or accuracy
1.00
0.75
0.50
0.25
0.00
"not" detector
p(X) given "X"
p(X) given "not X"
p(X) given "please X"
p(X) given "Y" (other task)
4
8
16
24
28
layer