
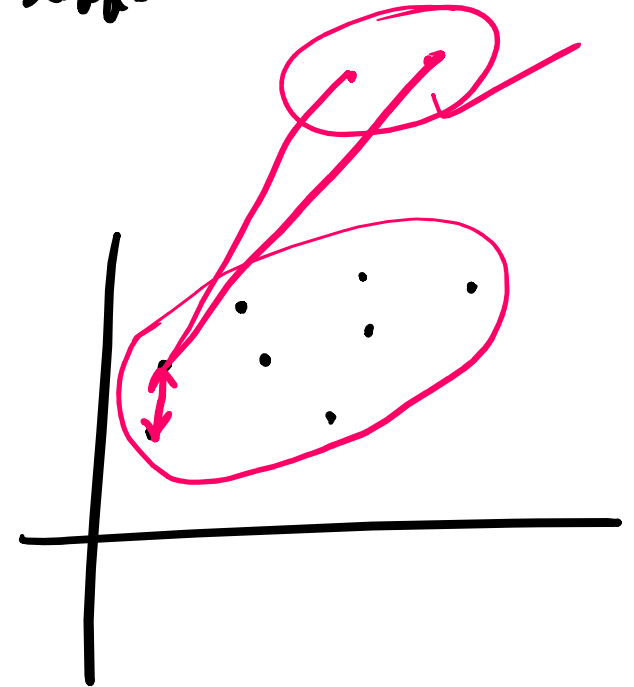


1) Handling Outliers

Outliers

Data Points which are significantly different from rest of the data points.

British

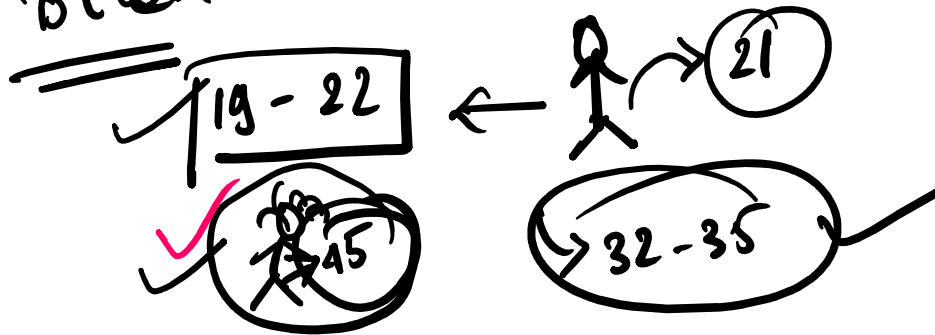

How can you treat the outliers?

- 1) Trimming
- 2) Capping (winsorization)

Python

mean + 3*std
upper_limit = dh[col].mean + 3 * dh['col'].std()
lower_limit = dh['col'].mean() - 3 * dh['col'].std()

dh['col'] = np.where(dh['col'] > upper_limit,

Capping

upper_limit,
np.where(dh['col'] < lower_limit,
lower_limit)


Trimming

if dh['col'] > upper_limit:
dh[col] = dropna()

2 Outlier Removal using IQR (InterQuartile Range)



when our data is skewed.

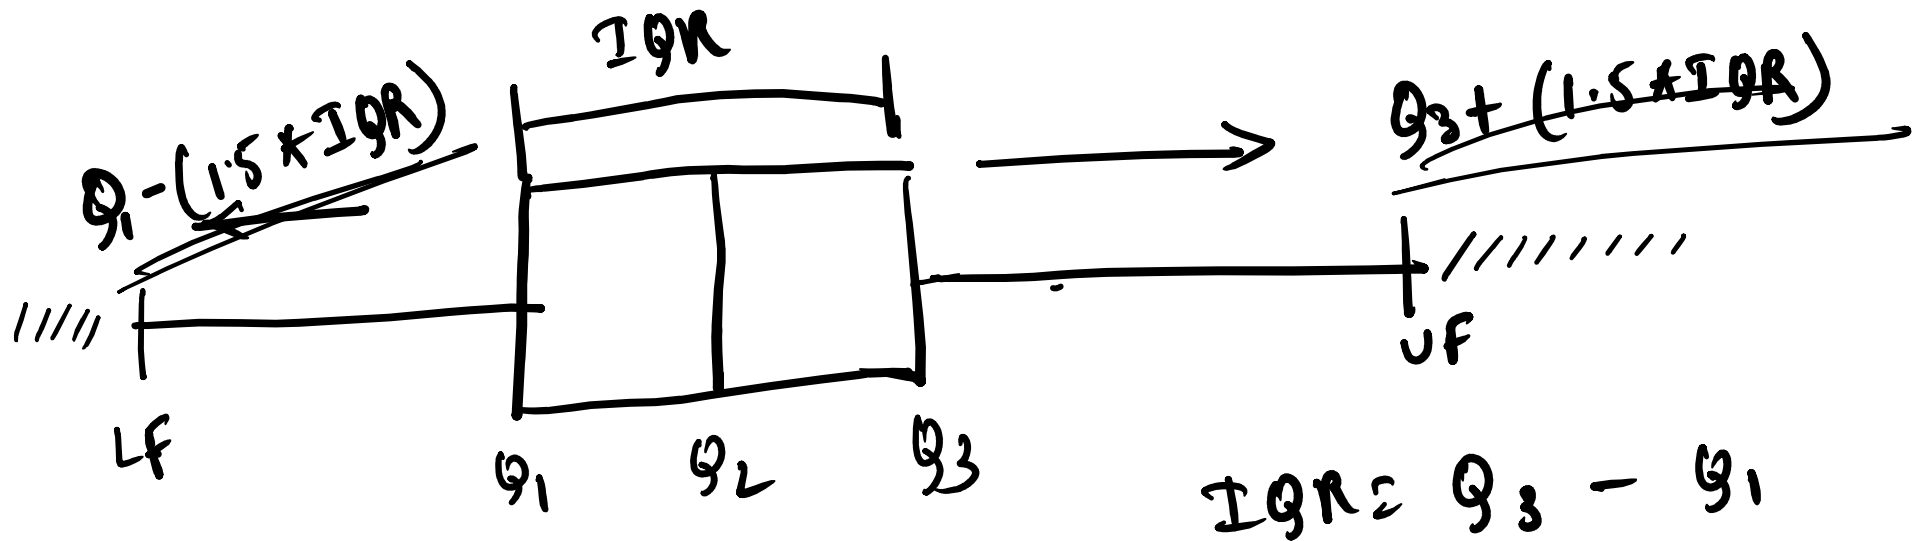

IQR - Inter Quartile Range

IQR Proximity Rule.

if $dh['coi'] < \underline{\text{lower_hence}}$: