

Name : Yadav Sugandha Pushkar chandra

Roll no : 92



Division : B

Semester : 7



Subject : Application Development using Full Stack
(701)

Assignment -1


Question – 1

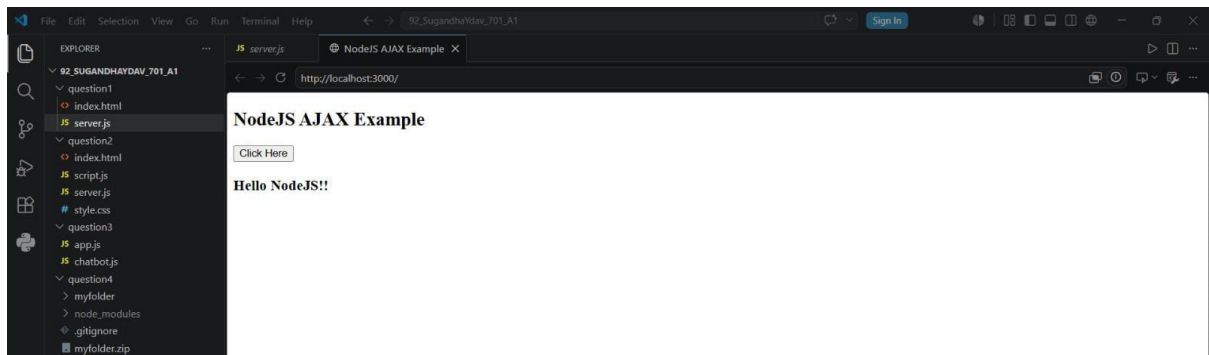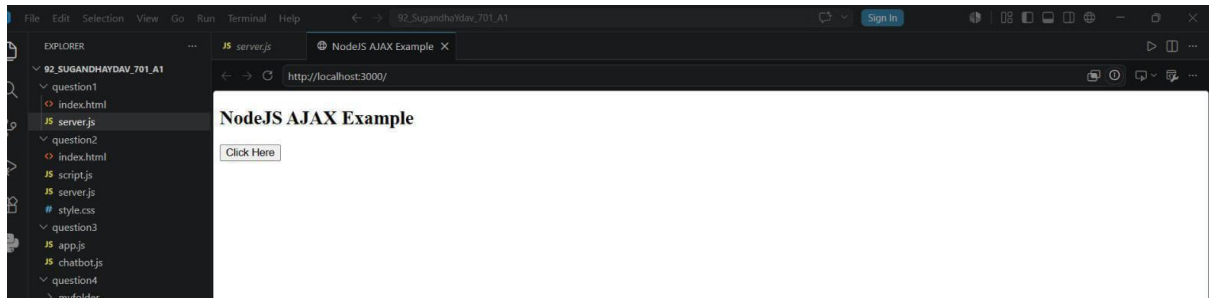

Question – 2

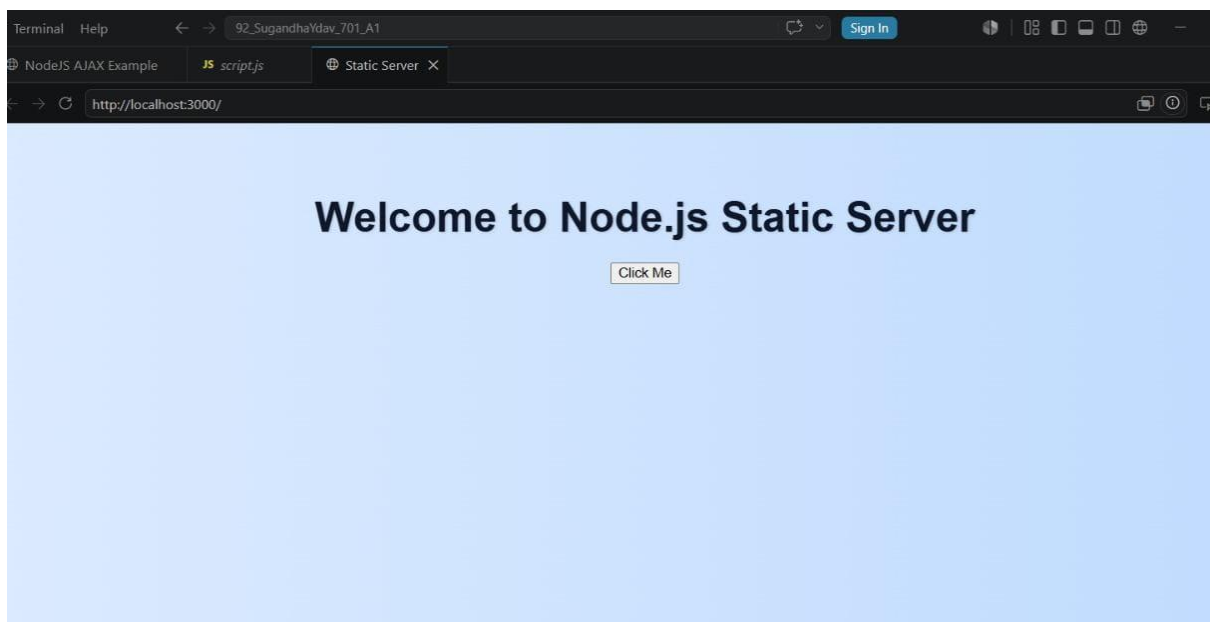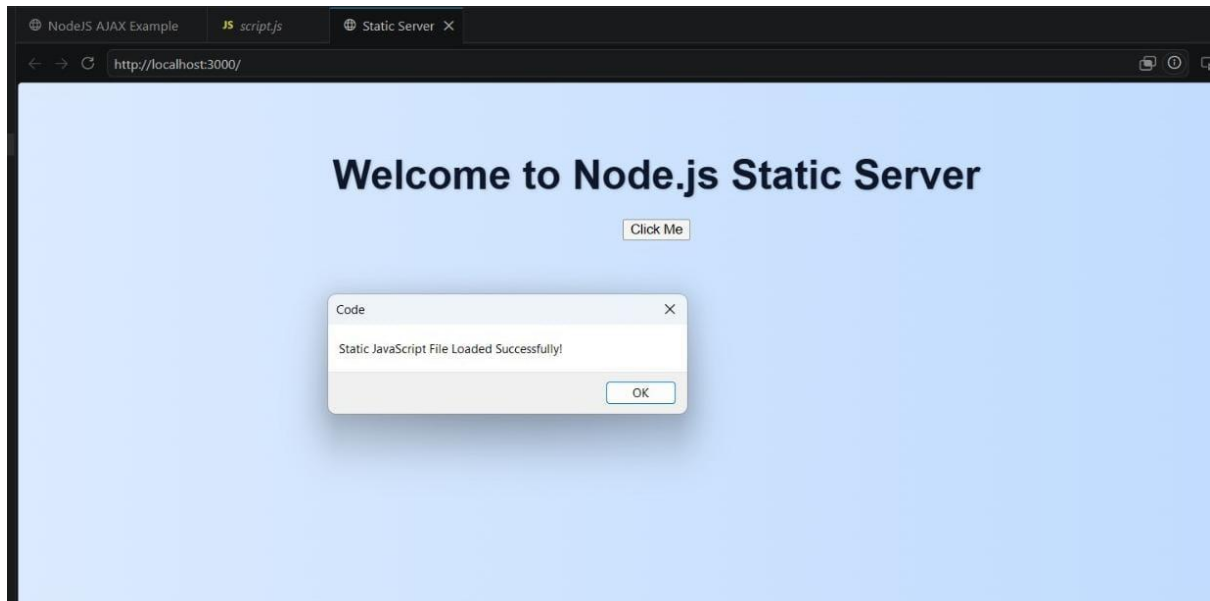


Question -3

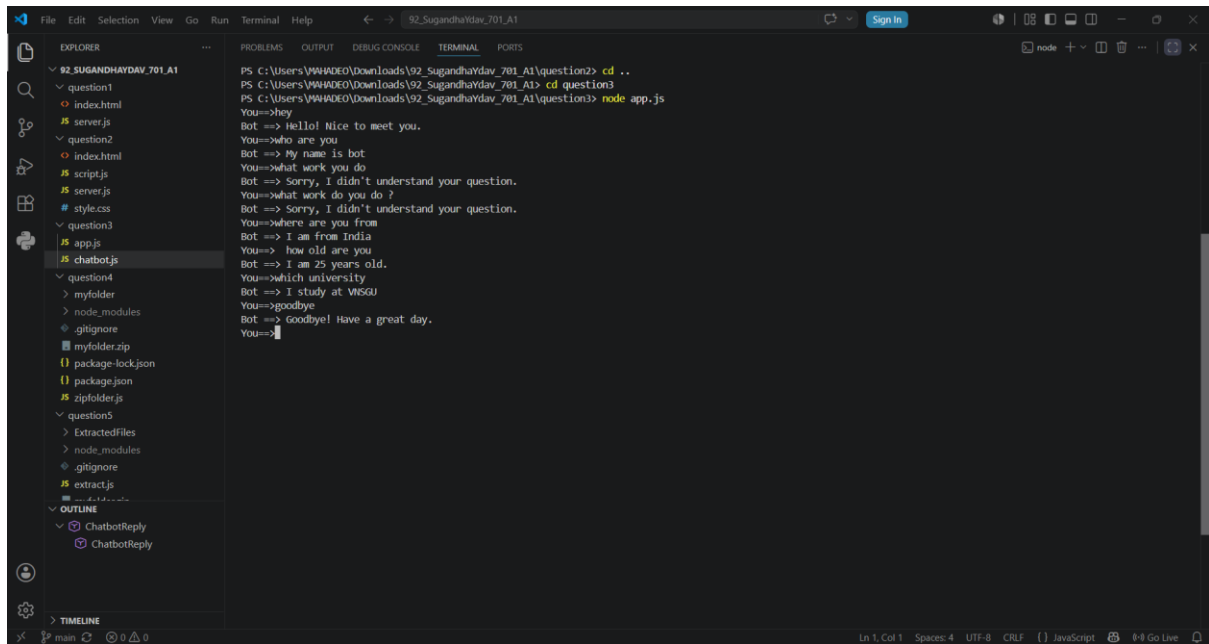

The screenshot shows the Visual Studio Code interface with a project named '92_SUGANDHAYDAY_701_A1'. The Explorer panel on the left shows a file structure with folders 'question1' through 'question5' and files like 'index.html', 'server.js', 'script.js', 'style.css', 'app.js', 'chatbot.js', 'myfolder.zip', 'package-lock.json', 'package.json', 'zipfolder.js', 'extract.js', and 'AdmZip'. The Terminal panel on the right shows the following output:

```
PS C:\Users\VAHADEO\Downloads\92_SugandhaYday_701_A1\question2> cd ..
PS C:\Users\VAHADEO\Downloads\92_SugandhaYday_701_A1> cd question3
PS C:\Users\VAHADEO\Downloads\92_SugandhaYday_701_A1\question3> node app.js
You==>hey
Bot ==> Hello! Nice to meet you.
You==>who are you
Bot ==> My name is bot
You==>what work you do
Bot ==> Sorry, I didn't understand your question.
You==>what work do you do ?
Bot ==> Sorry, I didn't understand your question.
You==>where are you from
Bot ==> I am from India
You==> how old are you
Bot ==> I am 25 years old.
You==>which university
Bot ==> I study at VNSGU
You==>goodbye
Bot ==> Goodbye! Have a great day.
You==>
```


Question -4

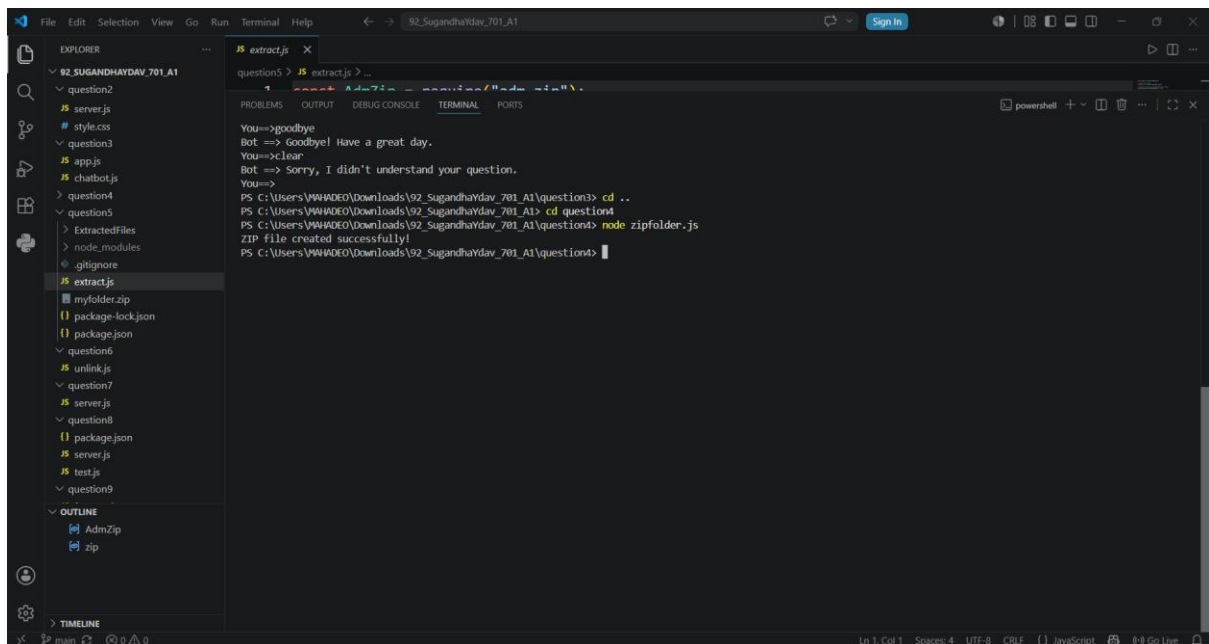

The screenshot shows the Visual Studio Code interface with a project named '92_SUGANDHAYDAY_701_A1'. The Explorer panel on the left shows a file structure with folders 'question2' through 'question9' and files like 'server.js', 'style.css', 'app.js', 'chatbot.js', 'myfolder.zip', 'package-lock.json', 'package.json', 'unlink.js', 'test.js', 'AdmZip', and 'zip'. The Terminal panel on the right shows the following output:

```
questions > .\extract.js > ...
You==>goodbye
Bot ==> Goodbye! Have a great day.
You==>clear
Bot ==> Sorry, I didn't understand your question.
You==>
PS C:\Users\VAHADEO\Downloads\92_SugandhaYday_701_A1\question3> cd ..
PS C:\Users\VAHADEO\Downloads\92_SugandhaYday_701_A1> cd question4
PS C:\Users\VAHADEO\Downloads\92_SugandhaYday_701_A1\question4> node zipfolder.js
ZIP file created successfully!
PS C:\Users\VAHADEO\Downloads\92_SugandhaYday_701_A1\question4>
```

Question -5

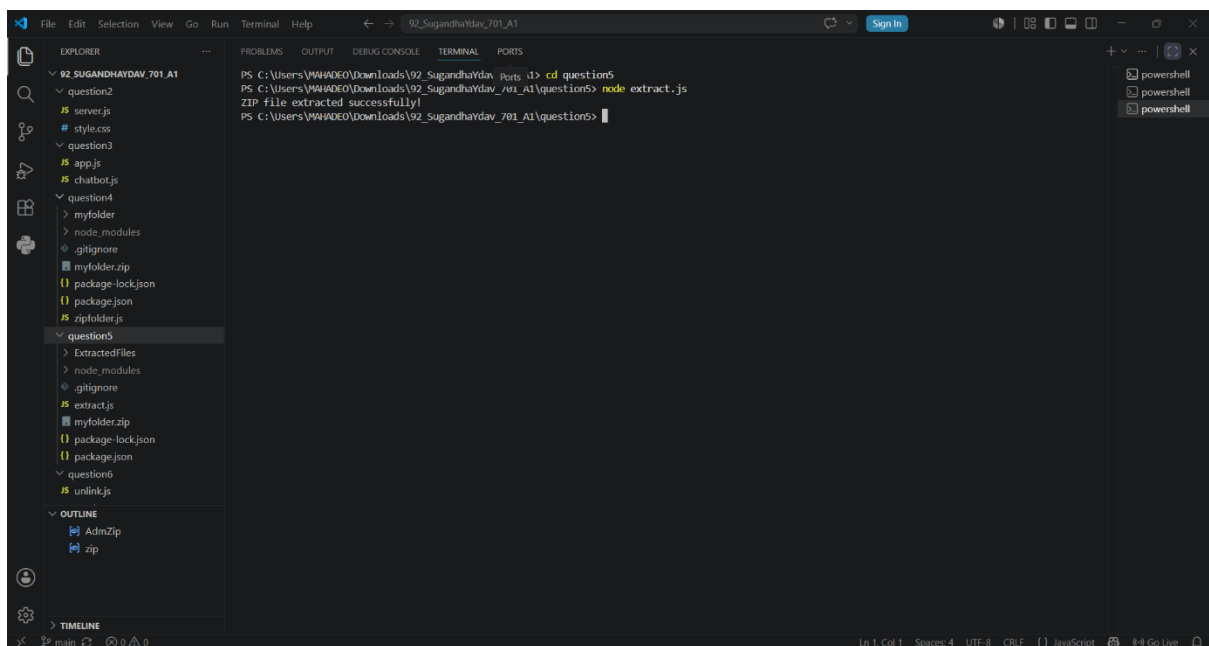


The screenshot displays the Visual Studio Code editor interface. The Explorer sidebar on the left shows a project structure with folders 'question2', 'question3', 'question4', and 'question5'. The 'question5' folder is expanded, revealing files like 'extract.js', 'myfolder.zip', 'package-lock.json', and 'package.json'. The Terminal window at the bottom shows the following commands and output:

```
PS C:\Users\VMW\Downloads\92_SugandhaYdav_Ports> cd question5
PS C:\Users\VMW\Downloads\92_SugandhaYdav_Ports\question5> node extract.js
ZIP file extracted successfully
PS C:\Users\VMW\Downloads\92_SugandhaYdav_701_A1\question5> |
```

The status bar at the bottom indicates the current file is 'main', the encoding is 'UTF-8', and the line/character count is 'Ln 1, Col 1'.

Question – 6

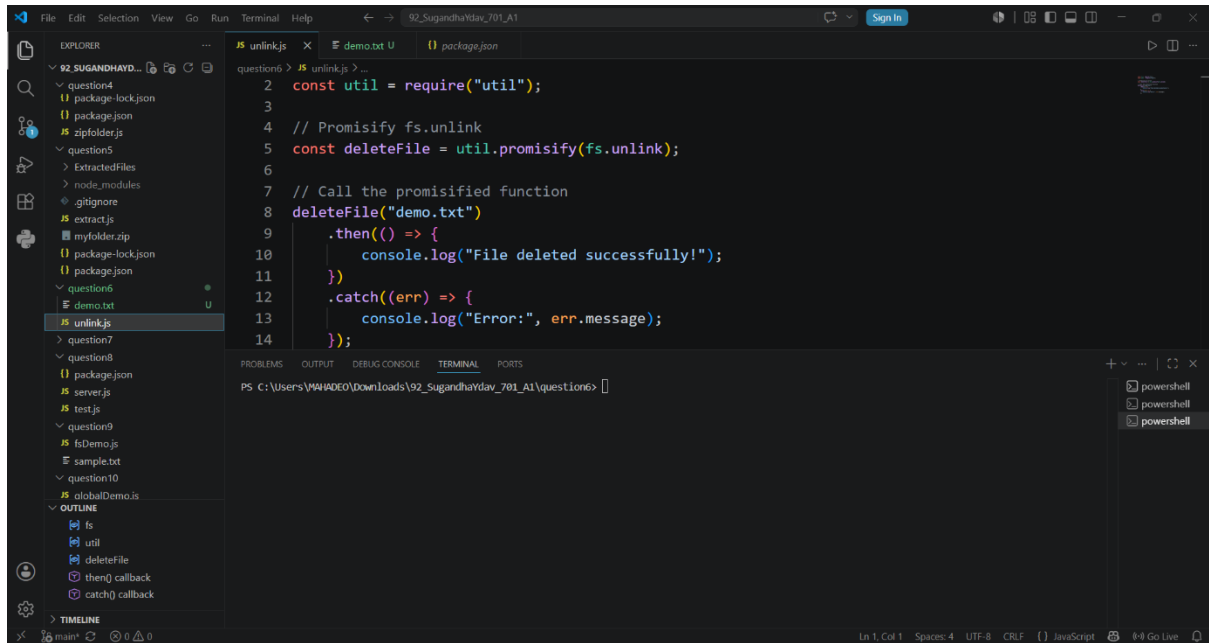


```
File Edit Selection View Go Run Terminal Help
92_SugandhaYdav_701_A1

EXPLORER
92_SUGANDHAYDAV...
  question4
  package-lock.json
  package.json
  zipfolder.js
  question5
  ExtractedFiles
  node_modules
  .gitignore
  extract.js
  myfolder.zip
  package-lock.json
  package.json
  question6
  demo.txt
  unlink.js
  question7
  question8
  package.json
  server.js
  test.js
  question9
  fsDemo.js
  sample.txt
  question10
  globalDemo.js
  OUTLINE
  fs
  util
  deleteFile
  then() callback
  catch() callback
  TIMELINE

main

question6 > JS unlink.js >
2 const util = require("util");
3
4 // Promisify fs.unlink
5 const deleteFile = util.promisify(fs.unlink);
6
7 // Call the promisified function
8 deleteFile("demo.txt")
9   .then(() => {
10     console.log("File deleted successfully!");
11   })
12   .catch((err) => {
13     console.log("Error:", err.message);
14   });

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS
PS C:\Users\VAHADEO\Downloads\92_SugandhaYdav_701_A1\question6>
```

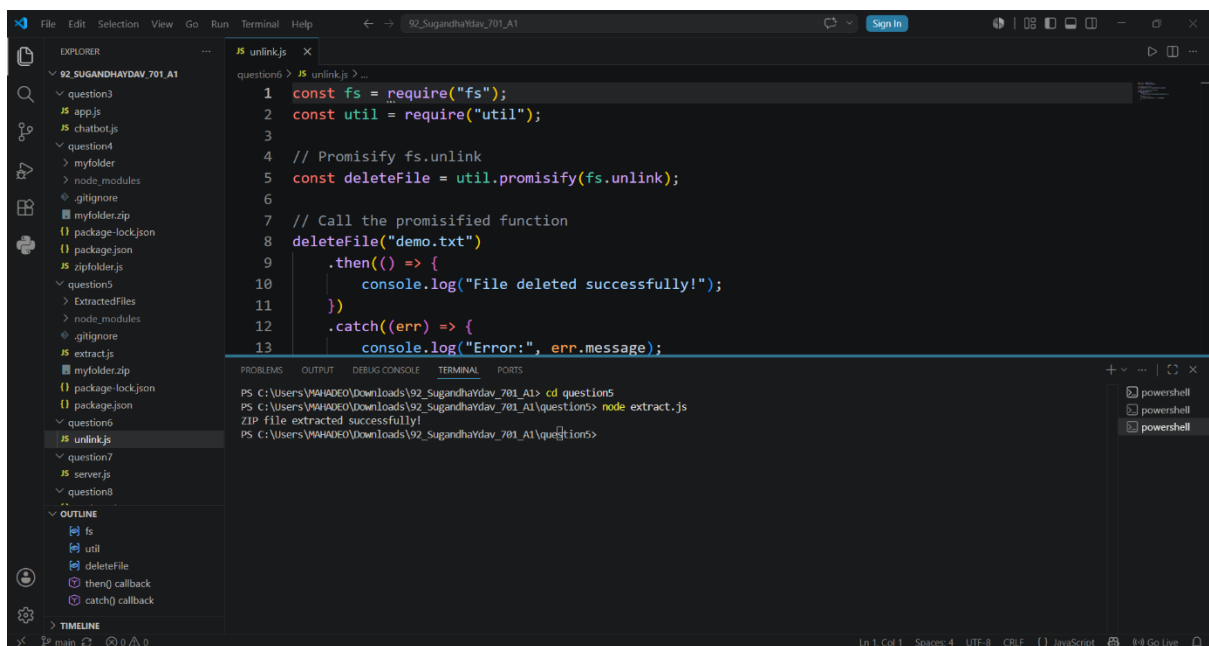

```
File Edit Selection View Go Run Terminal Help
92_SugandhaYdav_701_A1


EXPLORER
92_SUGANDHAYDAV_701_A1
  question3
  app.js
  chatbot.js
  question4
  myfolder
  node_modules
  .gitignore
  myfolder.zip
  package-lock.json
  package.json
  zipfolder.js
  question5
  ExtractedFiles
  node_modules
  .gitignore
  extract.js
  myfolder.zip
  package-lock.json
  package.json
  question6
  unlink.js
  question7
  server.js
  question8
  OUTLINE
  fs
  util
  deleteFile
  then() callback
  catch() callback
  TIMELINE

main


question6 > JS unlink.js > ...
1 const fs = require("fs");
2 const util = require("util");
3
4 // Promisify fs.unlink
5 const deleteFile = util.promisify(fs.unlink);
6
7 // Call the promisified function
8 deleteFile("demo.txt")
9   .then(() => {
10     console.log("File deleted successfully!");
11   })
12   .catch((err) => {
13     console.log("Error:", err.message);
14   });



PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS
PS C:\Users\VAHADEO\Downloads\92_SugandhaYdav_701_A1> cd question5
PS C:\Users\VAHADEO\Downloads\92_SugandhaYdav_701_A1\question5> node extract.js
ZIP file extracted successfully!
PS C:\Users\VAHADEO\Downloads\92_SugandhaYdav_701_A1\question5>
```

Question – 7

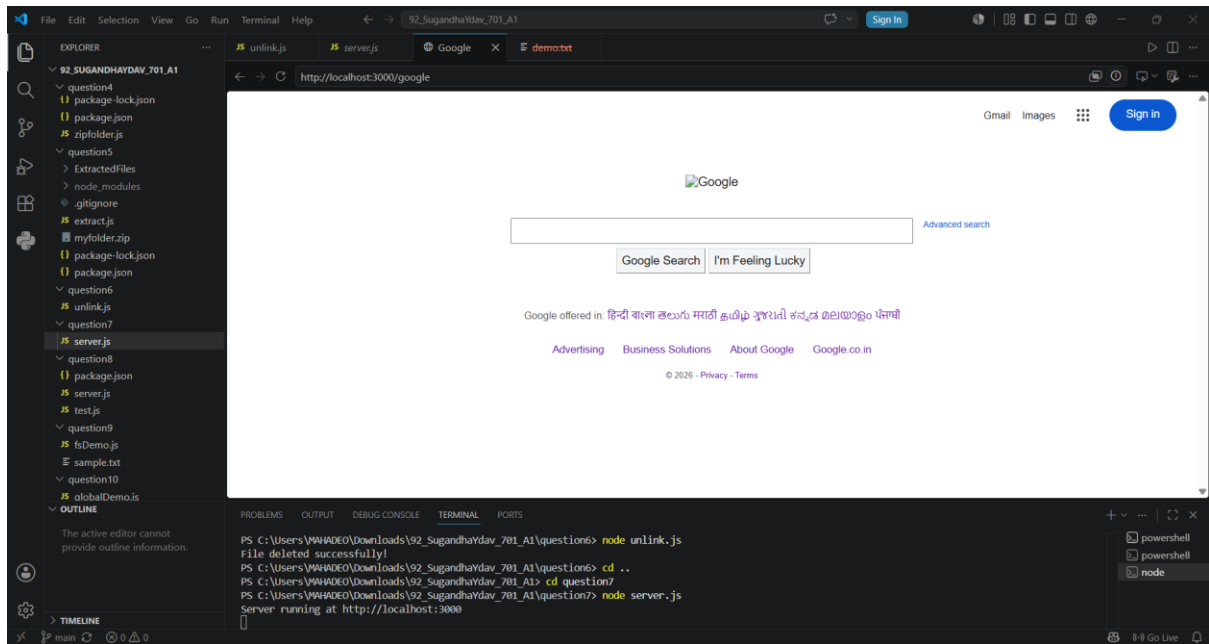


Question – 8

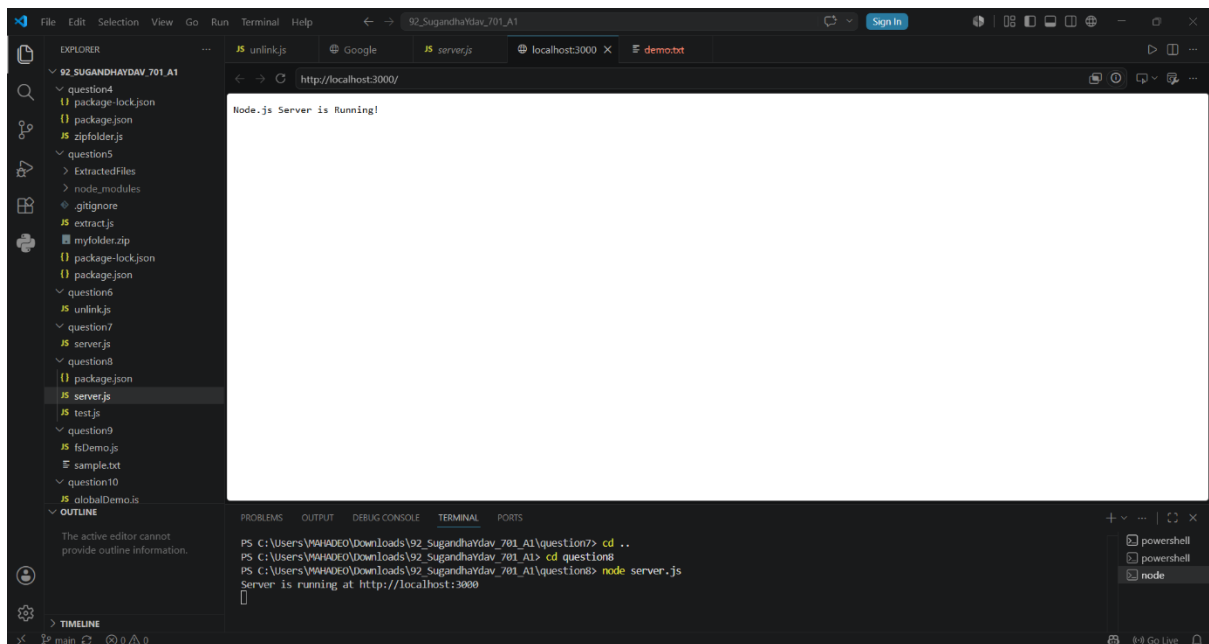


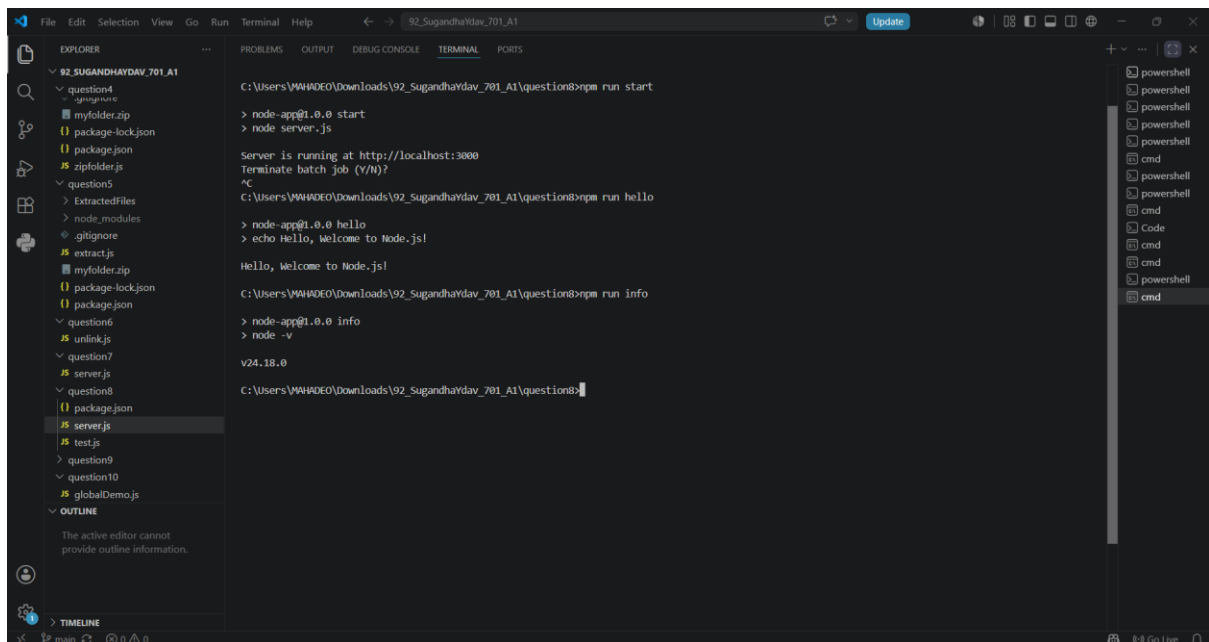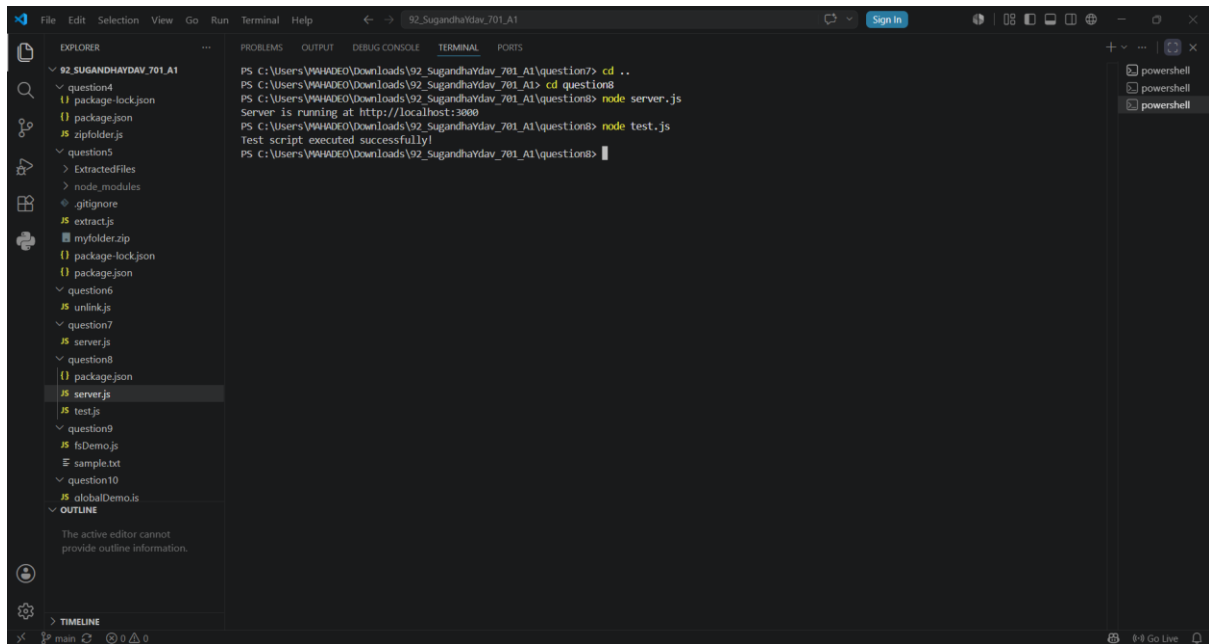

Question – 9

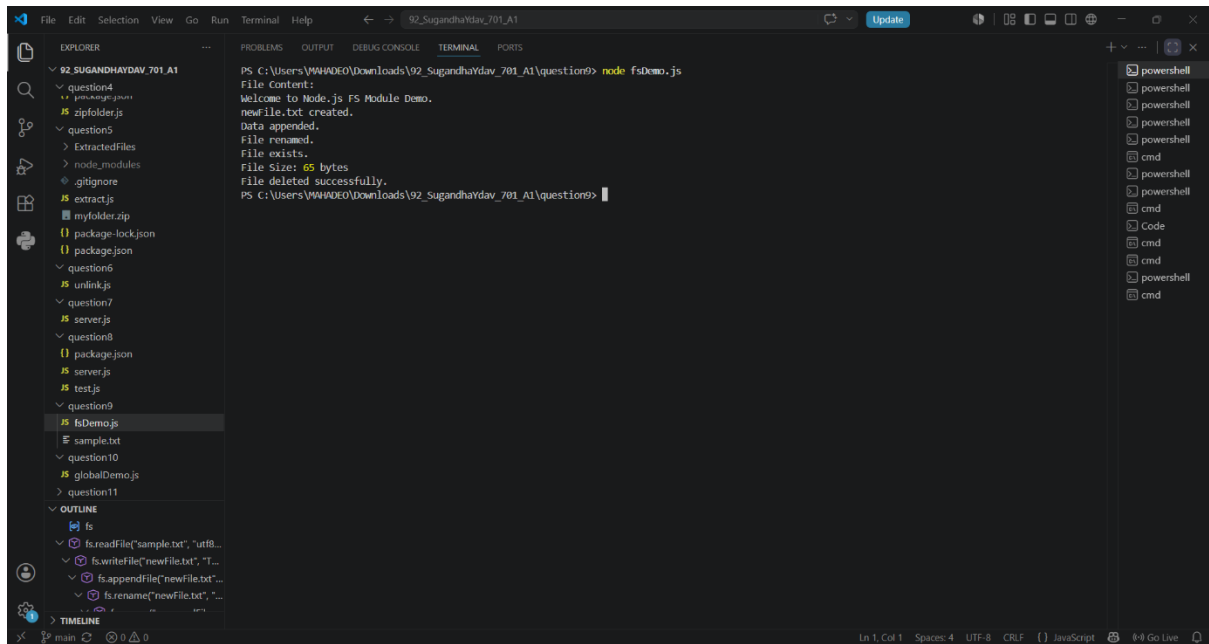

```
PS C:\Users\VAHADEO\Downloads\92_SugandhaYdav_701_A1\question9> node fsDemo.js
File Content:
Welcome to Node.js FS Module Demo.
newFile.txt created.
Data appended.
File renamed.
File exists.
File Size: 65 bytes
File deleted successfully.
PS C:\Users\VAHADEO\Downloads\92_SugandhaYdav_701_A1\question9>
```

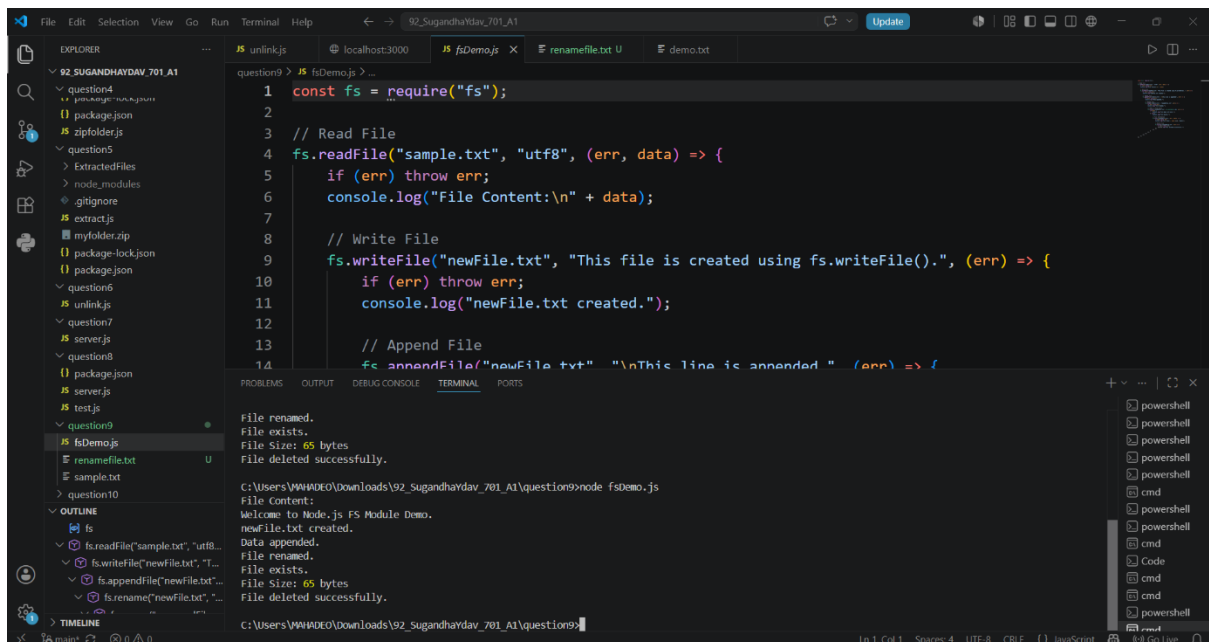


```
1 const fs = require("fs");
2
3 // Read File
4 fs.readFile("sample.txt", "utf8", (err, data) => {
5   if (err) throw err;
6   console.log("File Content:\n" + data);
7
8   // Write File
9   fs.writeFile("newFile.txt", "This file is created using fs.writeFile().", (err) => {
10     if (err) throw err;
11     console.log("newFile.txt created.");
12
13     // Append File
14     fs.appendFile("newFile.txt", "\nThis line is appended " (err) => {
```

```
File renamed.
File exists.
File Size: 65 bytes
File deleted successfully.

C:\Users\VAHADEO\Downloads\92_SugandhaYdav_701_A1\question9>node fsDemo.js
File Content:
Welcome to Node.js FS Module Demo.
newFile.txt created.
Data appended.
File renamed.
File exists.
File Size: 65 bytes
File deleted successfully.

C:\Users\VAHADEO\Downloads\92_SugandhaYdav_701_A1\question9>
```

Question – 10

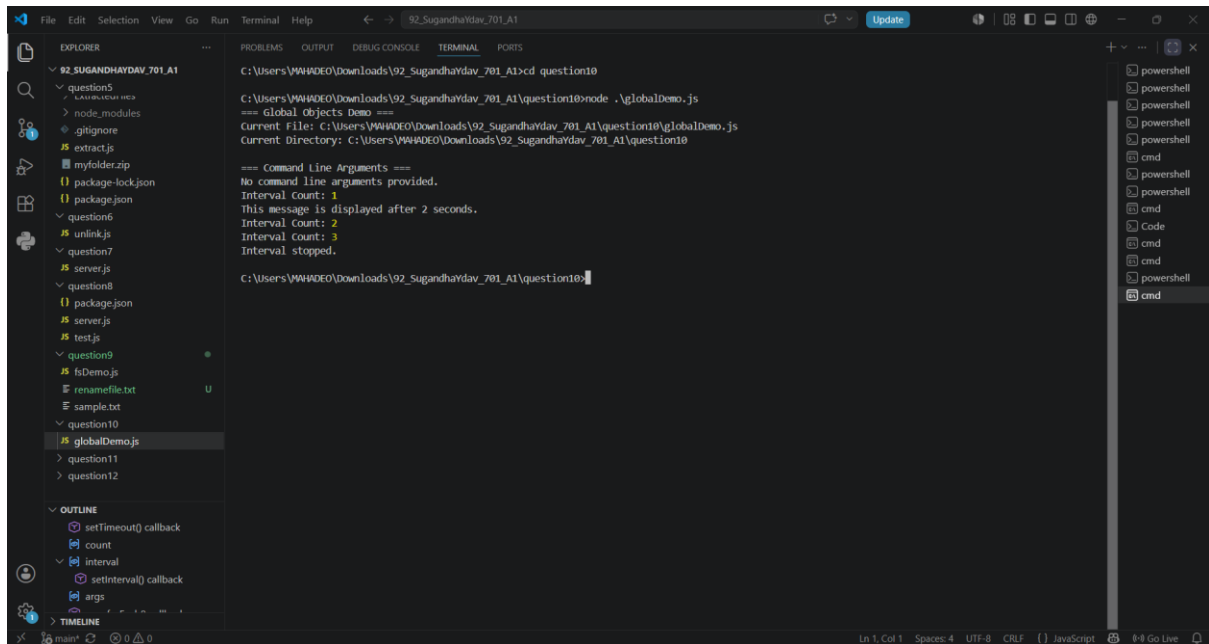


The screenshot shows the VS Code editor with a file named `globalDemo.js` selected in the Explorer. The file content is as follows:

```
=== Global Objects Demo ===  
Current File: C:\Users\VAHADEO\Downloads\92_SugandhaYdav_701_A1\question10\globalDemo.js  
Current Directory: C:\Users\VAHADEO\Downloads\92_SugandhaYdav_701_A1\question10  
  
=== Command Line Arguments ===  
No command line arguments provided.  
Interval Count: 1  
This message is displayed after 2 seconds.  
Interval Count: 2  
Interval Count: 3  
Interval stopped.
```

The terminal output shows the execution of the script:

```
C:\Users\VAHADEO\Downloads\92_SugandhaYdav_701_A1>cd question10  
C:\Users\VAHADEO\Downloads\92_SugandhaYdav_701_A1\question10>node .\globalDemo.js  
=== Global Objects Demo ===  
Current File: C:\Users\VAHADEO\Downloads\92_SugandhaYdav_701_A1\question10\globalDemo.js  
Current Directory: C:\Users\VAHADEO\Downloads\92_SugandhaYdav_701_A1\question10  
  
=== Command Line Arguments ===  
No command line arguments provided.  
Interval Count: 1  
This message is displayed after 2 seconds.  
Interval Count: 2  
Interval Count: 3  
Interval stopped.  
C:\Users\VAHADEO\Downloads\92_SugandhaYdav_701_A1\question10>
```

Question – 11

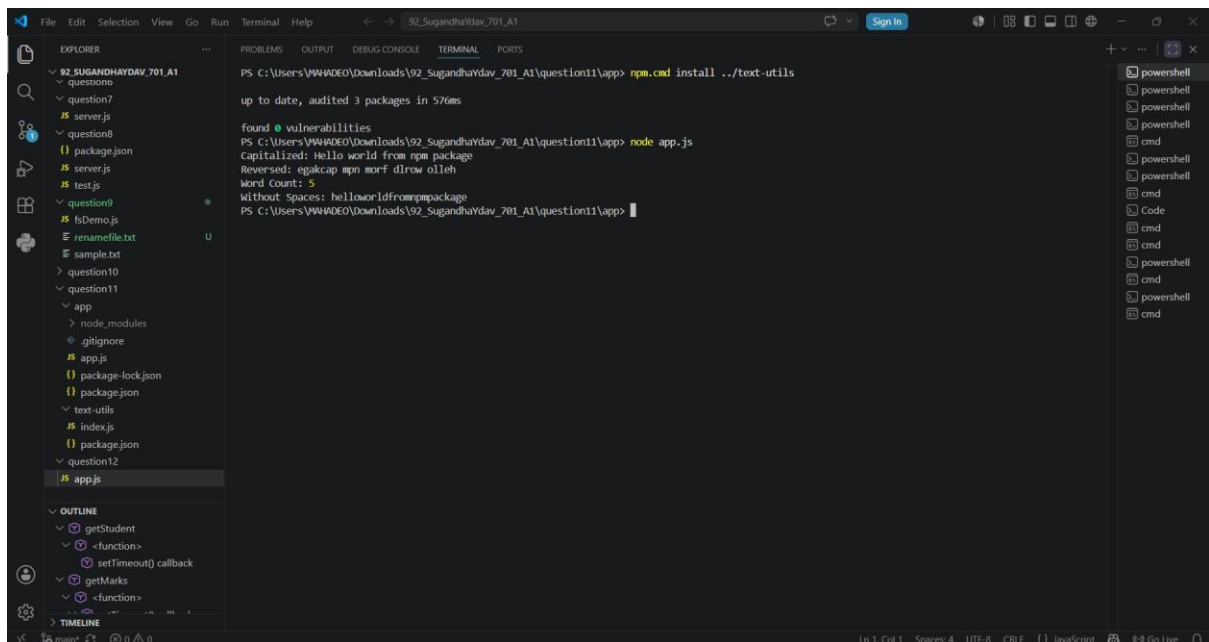


The screenshot shows the VS Code editor with a file named `app.js` selected in the Explorer. The file content is as follows:

```
getStudent  
<function>  
setTimeout() callback  
getMarks  
<function>
```

The terminal output shows the execution of the script:

```
PS C:\Users\VAHADEO\Downloads\92_SugandhaYdav_701_A1\question11>npm.cmd install ../text-utils  
up to date, audited 3 packages in 576ms  
  
found 0 vulnerabilities  
PS C:\Users\VAHADEO\Downloads\92_SugandhaYdav_701_A1\question11>node app.js  
Capitalized: Hello world from npm package  
Reversed: egakcap mpm morf dlrow olleh  
Word Count: 5  
Without Spaces: helloworldfrommpmpackage  
PS C:\Users\VAHADEO\Downloads\92_SugandhaYdav_701_A1\question11>
```

Question – 12

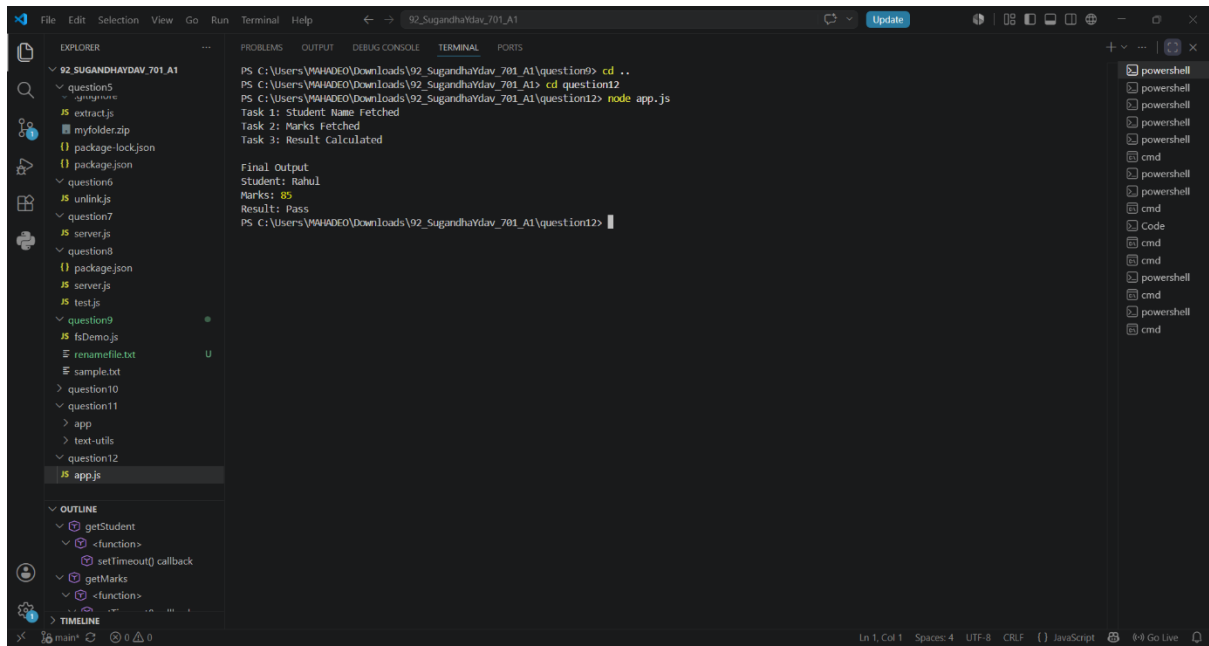

The screenshot displays the Visual Studio Code editor interface. The Explorer panel on the left shows a project structure with a folder named '92_SUGANDHAYDAR_701_A1'. Inside this folder, there are several sub-folders and files, including 'question5', 'extract.js', 'myfolder.zip', 'package-lock.json', 'question6', 'unlink.js', 'question7', 'server.js', 'question8', 'package.json', 'test.js', 'question9', 'fsDemo.js', 'renamefile.txt', 'sample.txt', 'question10', 'question11', 'app', 'text-utils', and 'question12'. The 'question12' folder is expanded, showing 'app.js' as the selected file.

The Terminal panel on the right shows the following output:

```
PS C:\Users\VAHADEO\Downloads\92_SugandhaYdav_701_A1\question9> cd ..
PS C:\Users\VAHADEO\Downloads\92_SugandhaYdav_701_A1> cd question12
PS C:\Users\VAHADEO\Downloads\92_SugandhaYdav_701_A1\question12> node app.js
Task 1: Student Name Fetched
Task 2: Marks Fetched
Task 3: Result Calculated

Final Output
Student: Rahul
Marks: 85
Result: Pass
PS C:\Users\VAHADEO\Downloads\92_SugandhaYdav_701_A1\question12>
```

The status bar at the bottom indicates the current file is 'app.js' in the 'main' workspace, with a line number of 1, column 1, and 4 spaces. The encoding is UTF-8, and the line ending is CRLF. The file is a JavaScript file.