

```
CREATE TABLE shopping (
    product_id INT PRIMARY KEY,
    product_name VARCHAR(50),
    price DECIMAL(10,2)
);
```

```
INSERT INTO shopping
```

```
VALUES
```

```
(101,'Laptop',55000),
```

```
(102,'Mouse',800),
```

```
(103,'Keyboard',1200),
```

```
(104,'Monitor',15000),
```

```
(105,'Printer',8500),
```

```
(106,'Speaker',4500);
```

```
SELECT * FROM shopping;
```

Output:

Result Grid			
		Filter Rows:	Edit: 
	product_id	product_name	price
▶	101	Laptop	55000.00
	102	Mouse	800.00
	103	Keyboard	1200.00
	104	Monitor	15000.00
	105	Printer	8500.00
	106	Speaker	4500.00
✱	NULL	NULL	NULL

```
SELECT MAX(price) AS Highest_Price
```

```
FROM shopping;
```


Ouput:

Result Grid	
	Highest_Price
▶	55000.00

```
SELECT MIN(price) AS Lowest_Price
```

```
FROM shopping;
```

Output:



The screenshot shows a 'Result Grid' window with a single column header 'Lowest_Price' and one data row containing the value '800.00'.


Lowest_Price
800.00

```
SELECT *
```

```
FROM shopping
```

```
WHERE price = (SELECT MAX(price) FROM shopping);
```

Output:

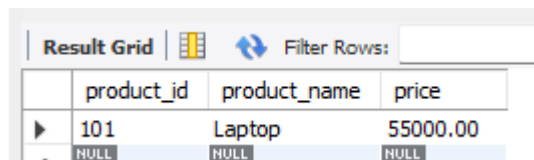

The screenshot shows a 'Result Grid' window with a 'Filter Rows' input field. The table has three columns: 'product_id', 'product_name', and 'price'. The first row shows '101', 'Laptop', and '55000.00'. The second row shows 'NULL', 'NULL', and 'NULL'.


product_id	product_name	price
101	Laptop	55000.00
NULL	NULL	NULL

```
SELECT *
```

```
FROM shopping
```

```
WHERE price = (SELECT MIN(price) FROM shopping);
```

Output:

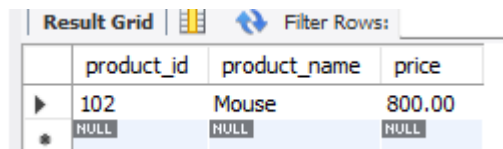

The screenshot shows a 'Result Grid' window with a 'Filter Rows' input field. The table has three columns: 'product_id', 'product_name', and 'price'. The first row shows '102', 'Mouse', and '800.00'. The second row shows 'NULL', 'NULL', and 'NULL'.

product_id	product_name	price
102	Mouse	800.00
NULL	NULL	NULL