

## Congratulations! You passed!

Grade  
received **80%**

Latest Submission  
Grade 80%

To pass 80% or  
higher

[Go to next item](#)

1. To help you practice strategies for machine learning, this week we'll present another scenario and ask how you would act. We think this "simulator" of working in a machine learning project will give you an idea of what leading a machine learning project could be like!

1 / 1 point

You are employed by a startup building self-driving cars. You are in charge of detecting road signs (stop sign, pedestrian crossing sign, construction ahead sign) and traffic signals (red and green lights) in images. The goal is to recognize which of these objects appear in each image. As an example, this image contains a pedestrian crossing sign and red traffic lights.



$$y^{(i)} = \begin{bmatrix} 0 \\ 1 \\ 0 \\ 1 \\ 0 \end{bmatrix} \begin{matrix} \text{"stop sign"} \\ \text{"pedestrian crossing sign"} \\ \text{"construction ahead sign"} \\ \text{"red traffic light"} \\ \text{"green traffic light"} \end{matrix}$$

Your 100,000 labeled images are taken using the front-facing camera of your car. This is also the distribution of data you care most about doing well on. You think you might be able to get a much larger dataset off the internet, which could be helpful for training even if the distribution of internet data is not the same.

Suppose that you came from working with a project for human detection in city parks, so you know that detecting humans in diverse environments can be a difficult problem. What is the first thing you do? Assume each of the steps below would take about an equal amount of time (a few days).

- ☐ Spend a few days collecting more data to determine how hard it will be to include more pedestrians in your dataset.
- ☒ Train a basic model and proceed with error analysis.
- ☐ Start by solving pedestrian detection, since you already have the experience to do this.
- ☐ Leave aside the pedestrian detection, to move faster and then later solve the pedestrian problem alone.

[Expand](#)

✓ **Correct**

Correct. As discussed in the lecture, it is better to create your first system quickly and then iterate.

2. Your goal is to detect road signs (stop sign, pedestrian crossing sign, construction ahead sign) and traffic signals (red and green lights) in images. The goal is to recognize which of these objects appear in each image. You plan to use a deep neural network with ReLU units in the hidden layers. For the output layer, which of the following gives you the most appropriate activation function?

1 / 1 point

- ☒ Sigmoid
- ☐ Softmax
- ☐ ReLU
- ☐ Linear

[Expand](#)

✓ **Correct**

Correct. This works well since the output would be valued between 0 and 1 which represents the probability that one of the possibilities is present in an image.

3. You are carrying out error analysis and counting up what errors the algorithm makes. Which of these datasets do you think you should manually go through and carefully examine, one image at a time?

1 / 1 point

- ☐ 10,000 randomly chosen images
- ☐ 10,000 images on which the algorithm made a mistake
- ☐ 500 randomly chosen images
- ☒ 500 images on which the algorithm made a mistake

Expand

Correct

Focus on images that the algorithm got wrong. Also, 500 is enough to give you a good initial sense of the error statistics. There's probably no need to look at 10,000, which will take a long time.

4. After working on the data for several weeks, your team ends up with the following data:

0 / 1 point

- 100,000 labeled images taken using the front-facing camera of your car.
- 900,000 labeled images of roads downloaded from the internet.
- Each image's labels precisely indicate the presence of any specific road signs and traffic signals or

combinations of them. For example,  $y^{(i)} = \begin{bmatrix} 1 \\ 0 \\ 0 \\ 1 \\ 0 \end{bmatrix}$  means the image contains a stop sign and a red traffic light.

Because this is a multi-task learning problem, when an image is not fully labeled (for example:  $\begin{pmatrix} 0 \\ ? \\ ? \\ 1 \\ 0 \end{pmatrix}$ ) we can use it if we ignore those entries when calculating the loss function. True/False?

- ☒ False
- ☐ True

Expand

Incorrect

We can't use the components of the labels that are missing but we can use the ones we have to train the model.

5. The distribution of data you care about contains images from your car's front-facing camera, which comes from a different distribution than the images you were able to find and download off the internet. The best way to split the data is using the 900,000 internet images to train, and divide the 100,000 images from your car's front-facing camera between dev and test sets. True/False?

0 / 1 point

- ☒ True
- ☐ False

Expand

Incorrect

100,000 images are too many to use in dev and test. A better distribution would be to use 80,000 of those images to train, and split the rest between dev and test.

6. Assume you've finally chosen the following split between of the data:

1 / 1 point

Dataset:	Contains:	Error of the algorithm:
Training	940,000 images randomly picked from (900,000 internet images + 60,000 car's front-facing camera images)	8.8%
Training-Dev	20,000 images randomly picked from (900,000 internet images + 60,000 car's front-facing camera images)	9.1%
Dev	20,000 images from your car's front-facing camera	14.3%
Test	20,000 images from the car's front-facing camera	14.8%

You also know that human-level error on the road sign and traffic signals classification task is around 0.5%. Which of the following are True? (Check all that apply).

- ☒ You have a large data-mismatch problem because your model does a lot better on the training-dev set than on the dev set

Correct

- ☐ Your algorithm overfits the dev set because the error of the dev and test sets are very close.
- ☐ You have a large variance problem because your training error is quite higher than the human-level error.

- ☐ You have a large variance problem because your model is not generalizing well to data from the same training distribution but that it has never seen before.
- ☒ You have a large avoidable-bias problem because your training error is quite a bit higher than the human-level error.

✓ Correct

↗ Expand

✓ Correct  
Great, you got all the right answers.

7. Assume you've finally chosen the following split between the data:

0 / 1 point

Dataset:	Contains:	Error of the algorithm:
Training	940,000 images randomly picked from (900,000 internet images + 60,000 car's front-facing camera images)	2%
Training-Dev	20,000 images randomly picked from (900,000 internet images + 60,000 car's front-facing camera images)	2.3%
Dev	20,000 images from your car's front-facing camera	1.3%
Test	20,000 images from the car's front-facing camera	1.1%

You also know that human-level error on the road sign and traffic signals classification task is around 0.5%. Based on the information given, a friend thinks that the training data distribution is much harder than the dev/test distribution. What do you think?

- ☒ There's insufficient information to tell if your friend is right or wrong.
- ☐ Your friend is wrong. (i.e., Bayes error for the dev/test distribution is probably higher than for the train distribution.)
- ☐ Your friend is probably right. (i.e., Bayes error for the dev/test distribution is probably lower than for the train distribution.)

↗ Expand

✗ Incorrect  
Notice that the test and dev errors are lower than the train and train-dev errors.

8. You decide to focus on the dev set and check by hand what the errors are due to. Here is a table summarizing your discoveries:

1 / 1 point

Overall dev set error	15.3%
Errors due to incorrectly labeled data	4.1%
Errors due to foggy pictures	2.0%
Errors due to partially occluded elements.	8.2%
Errors due to other causes	1.0%

In this table, 4.1%, 8.2%, etc. are a fraction of the total dev set (not just examples of your algorithm mislabeled). For example, about  $8.2/15.3 = 54\%$  of your errors are due to partially occluded elements in the image.

Which of the following is the correct analysis to determine what to prioritize next?

- ☒ You should weigh how costly it would be to get more images with partially occluded elements, to decide if the team should work on it or not.
- ☐ Since  $8.2 > 4.1 + 2.0 + 1.0$ , the priority should be to get more images with partially occluded elements.
- ☐ You should prioritize getting more foggy pictures since that will be easier to solve.
- ☐ Since there is a high number of incorrectly labeled data in the dev set, you should prioritize fixing the labels on the whole training set.

↗ Expand

✓ Correct  
Correct. You should consider the tradeoff between the data accessibility and potential improvement of your model trained on this additional data.

9. You decide to focus on the dev set and check by hand what the errors are due to. Here is a table summarizing your discoveries:

1 / 1 point

Overall dev set error	15.3%
Errors due to incorrectly labeled data	4.1%

Errors due to incorrectly labeled data	7.2%
Errors due to foggy pictures	3.0%
Errors due to partially occluded elements.	7.2%
Errors due to other causes	1.0%

In this table, 4.1%, 7.2%, etc. are a fraction of the total dev set (not just examples of your algorithm mislabeled). For example, about  $7.2/15.3 = 47\%$  of your errors are due to partially occluded elements.

You find out that there is an anti-reflective film guarantee to eliminate the sun reflection, but it is quite costly. Which of the following gives the best description of what the investment in the film can do to the model?

- ☐ The overall test set error will be reduced by at most 7.2%.
- ☒ The film will reduce the dev set error with 7.2% at the most.
- ☐ The film will reduce at least 7.2% of the dev set error.


[Expand](#)

✓ **Correct**

Yes. Remember that this 7.2% gives us an estimate for the ceiling of how much the error can be reduced when the cause is fixed.

10. You decide to use data augmentation to address foggy images. You find 1,000 pictures of fog off the internet, and "add" them to clean images to synthesize foggy days, like this:

1 / 1 point

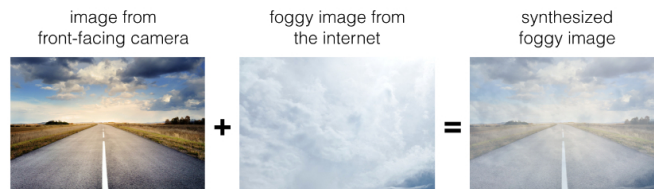

We can't use this data since they have a different distribution from the ones we used (internet and front-facing camera). True/False?

- ☐ True
- ☒ False

[Expand](#)

✓ **Correct**

Correct. The new synthesized images are added to the training set and as long as they look realistic to the human eye this will be useful data to train the model.

11. After working further on the problem, you've decided to correct the incorrectly labeled data. Your team corrects the labels of the wrongly predicted images on the dev set. Which of the following is a necessary step to take?

1 / 1 point

- ☐ Correct the labels of the train set.
- ☒ Correct the labels of the test set.
- ☐ Use a correctly labeled version and an incorrectly labeled version to make the model more robust.
- ☐ Create a train-dev set to estimate how many incorrectly labeled examples are in the train set.

[Expand](#)

✓ **Correct**

Correct. Recall that the dev set and the test set must come from the same distribution.

12. Your client asks you to add the capability to detect dogs that may be crossing the road to the system. He can provide a relatively small set containing dogs. Which of the following do you agree most with?

1 / 1 point

- ☒ You can use weights pre-trained on the original data, and fine-tune with the data now including the dogs.
- ☐ Using pre-trained weights can severely hinder the ability of the model to detect dogs since they have too many learned features.

- ☐ You will have to re-train the whole model now including the dogs' data.
- ☐ You should train a single new model for the dogs' task, and leave the previous model as it is.

 Expand

 **Correct**

Correct. Since your model has learned useful low-level features to tackle the new task we can conserve those by using the pre-trained weights.

13. One of your colleagues at the startup is starting a project to classify stop signs in the road as speed limit signs or not. He has approximately 30,000 examples of each image and 30,000 images without a sign. He thought of using your model and applying transfer learning but then he noticed that you use multi-task learning, hence he can't use your model. True/False?

1 / 1 point

- ☐ True
- ☒ False

 Expand

 **Correct**

Correct. When using transfer learning we can remove the last layer. That is one of the aspects that is different from a binary classification problem.

14. To recognize red and green lights, you have been using this approach:

1 / 1 point

- **(A)** Input an image (x) to a neural network and have it directly learn a mapping to make a prediction as to whether there's a red light and/or green light (y).

A teammate proposes a different, two-step approach:

- **(B)** In this two-step approach, you would first (i) detect the traffic light in the image (if any), then (ii) determine the color of the illuminated lamp in the traffic light.

Between these two, Approach B is more of an end-to-end approach because it has distinct steps for the input end and the output end. True/False?

- ☐ True
- ☒ False

 Expand

 **Correct**

Yes. (A) is an end-to-end approach as it maps directly the input (x) to the output (y).

15. An end-to-end approach doesn't require that we hand-design useful features, it only requires a large enough model. True/False?

1 / 1 point

- ☐ False
- ☒ True

 Expand

 **Correct**

Correct. This is one of the major characteristics of deep learning models, that we don't need to hand-design the features.