


Cloud Computing

Networking



What is network ?

- It is the interconnection of multiple devices, generally termed as Hosts connected using multiple paths
- The purpose of network is: sending/receiving data or media
- It involves various devices like hubs, switches, routers etc.

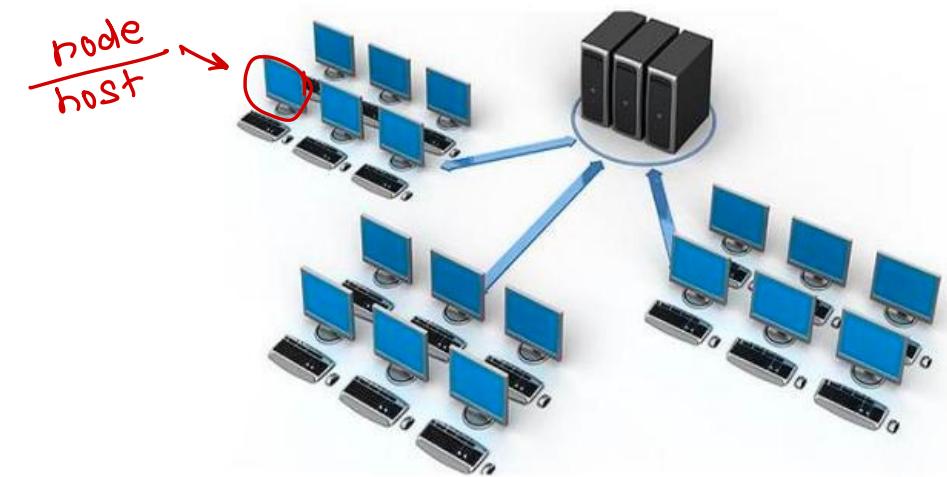


Wired network

- The network build by connecting devices together using wires/cables as a medium to transfer the data

- Cables

- ✓ Coaxial cable
- ✓ Twisted pairs cables
- ✓ Fiber optics

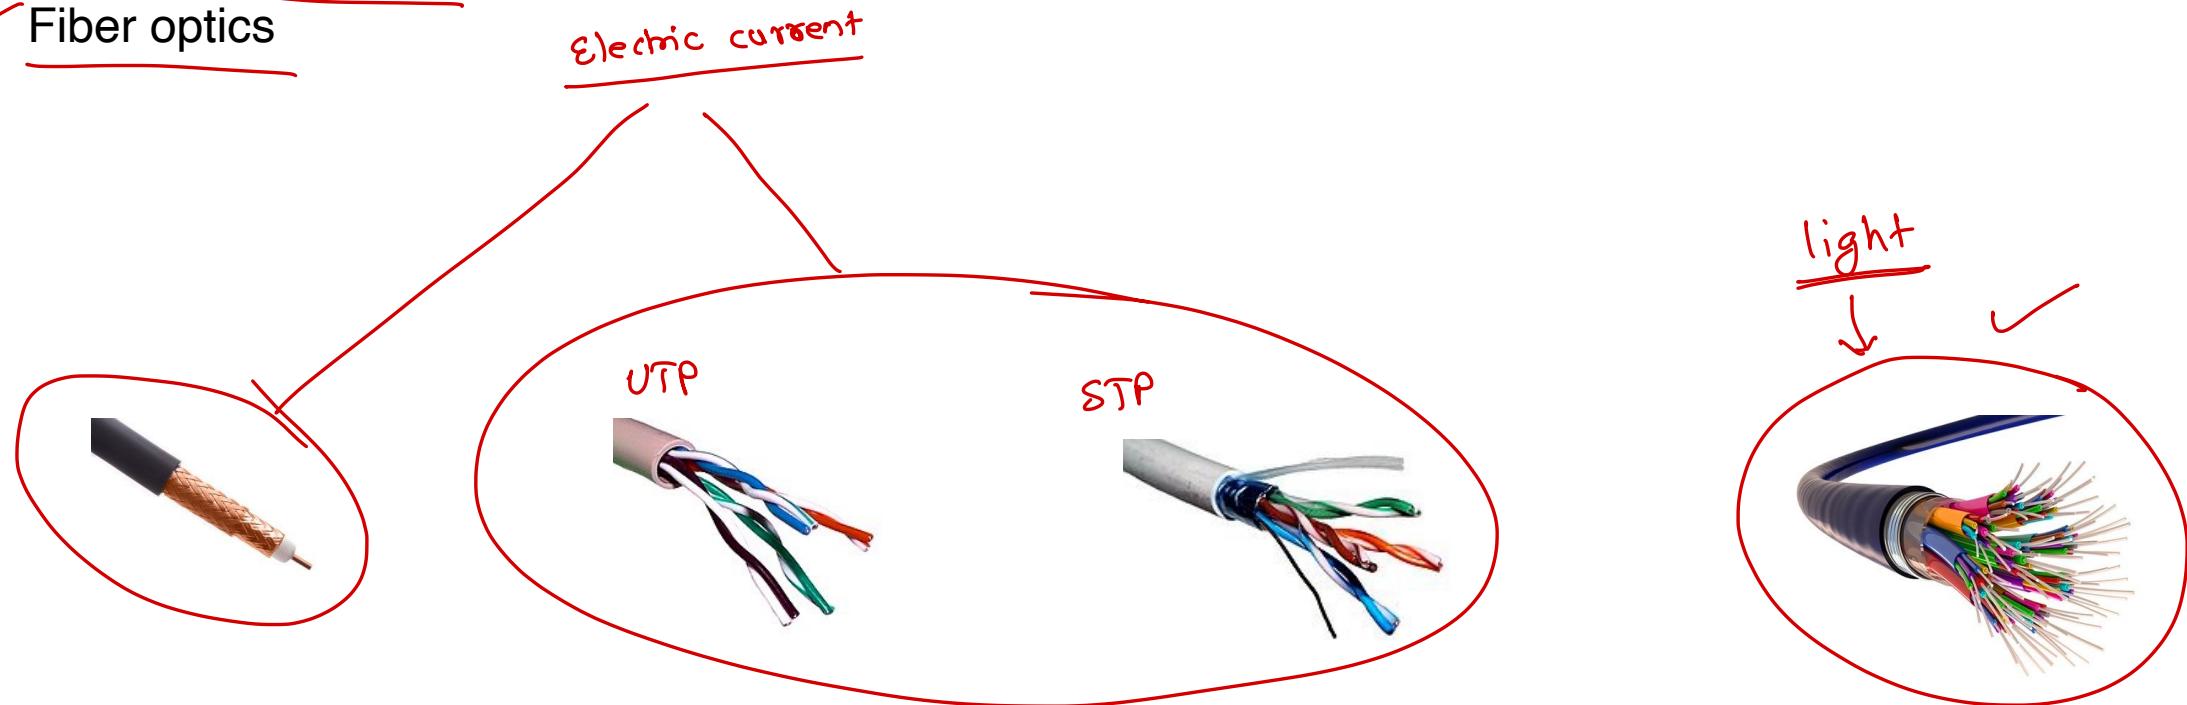

Wireless network

- The network build by connecting devices together using air as a medium to transfer the data
- EM Waves are used to transfer data from sender to receiver



EM Waves

Network Types

■ Personal Area Network (PAN)

- Smallest network which is very personal to the user
- E.g. BlueTooth

■ Local Area Network (LAN)

school, college, organization

- Spans across building(s) and operated under single administrative system
- E.g. company, school network
- Technologies: TokenRing or Ethernet

■ Metropolitan Area Network (MAN)

- Spans across cities
- E.g. cable network
- Technologies: high speed fiber optics

■ Wide Area Network (WAN)

- Spans across countries
- Technologies: ATM, Frame Relay



What is a network topology ?

- Physical arrangement of computers is known as topology
- Famous topologies
 - Bus
 - Ring
 - ~~Token Ring~~ *connected Ring*
 - Star
 - Mesh




ISO OSI model [Open System Interconnect]

- Conceptual model that characterizes and standardizes the communication functions of a telecommunication or computing system without regard to its underlying internal structure and technology
- Goal is the interoperability of diverse communication systems with standard communication protocols
- Layered architecture having 7 layers
 - ✓ ■ Application
 - ✓ ■ Presentation
 - ✓ ■ Session
 - ✓ ■ Transport
 - ✓ ■ Network
 - ✓ ■ Data Link
 - ✓ ■ Physical



Application Layer

- Specifies interface methods used by hosts in a communications network
- Contains communication protocols
 - HTTP [80]: Hyper Text Transfer Protocol
 - HTTPs [443]: Secure Hyper Text Transfer Protocol
 - FTP [20, 21]: File Transfer Protocol
 - SFTP [115]: Simple FTP
 - DNS [53]: Domain Name Service
 - NFS [1023]: Network File System
 - POP3 [110]: Post Office Protocol
 - SMTP [25]: Simple Mail Transfer Protocol
 - SSH [22]: Secure Shell
 - LDAP [389]: Lightweight Directory Access Protocol

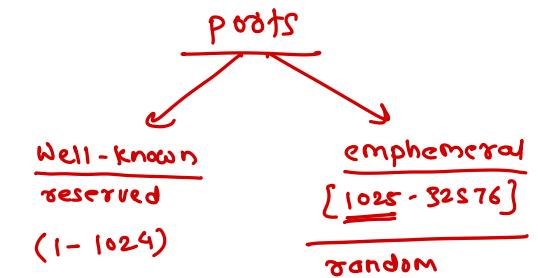

Presentation Layer

- Serves as the **data translator** for the network

- Also known as syntax layer**

- Responsible for

- Translation**
- Compression/Decompression**
- Encoding/Decoding**
- Encryption/Decryption**

Sender
ASCII → EBCDIC

Receiver
EBCDIC → ASCII

: saves bandwidth & time


Session Layer

- Provides mechanism for opening, closing and managing session between processes
- Communication sessions consist of requests and responses that occur between applications
- Protocols
 - ASP: AppleTalk Session Protocol ✗
 - ADSP: AppleTalk Data Stream Protocol ✗
 - NetBIOS: Network BIOS
 - PAP: Password Authentication Protocol
 - PPTP: Point to Point Tunnelling Protocol (CUPN)
 - RPC: Remote Procedure Call
 - SCP: Session Control Protocol
 - SDP: Socket Direct Protocol




Transport Layer

- Provide host-to-host communication services for applications
- Creates Segment (data unit) containing
 - Sequence number
 - Checksum : used to check if the receiver has received data intact
 - Port number
- Protocols
 - TCP
 - Connection oriented protocol
 - Provides: Flow Control, Error checking
 - Guarantees data delivery
 - Slower than UDP
 - E.g. WWW, HTTP
 - UDP
 - Connectionless protocol
 - Does not provide flow control
 - Does not guarantee data delivery
 - Faster than TCP
 - E.g. streaming, online games

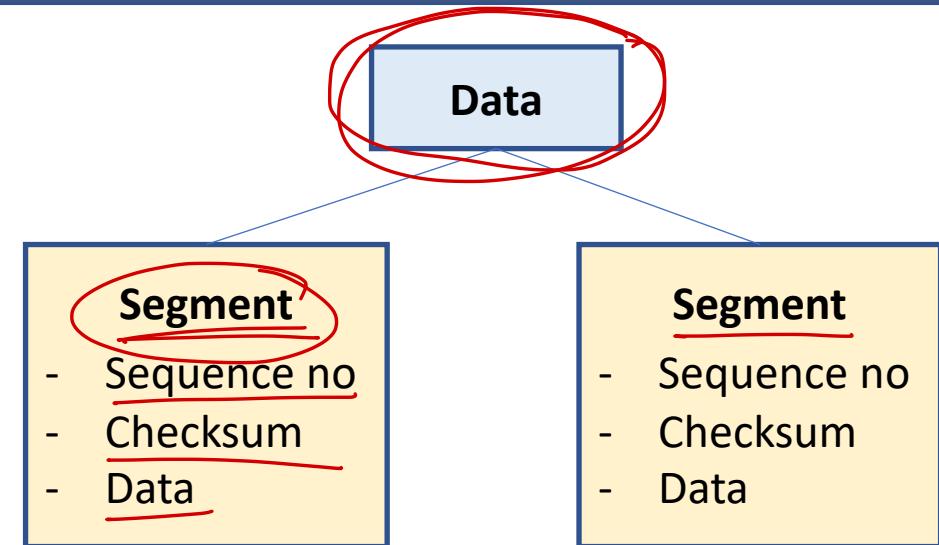


Network Layer

- Responsible for packet forwarding including routing through intermediate routers
- Responsible for splitting segment into packets containing
 - Source IP address
 - Destination IP address
- Protocols
 - IP: Internet Protocol
 - IPX: Internetwork Packet Exchange
 - IPSec: Internet Protocol Security
 - EGP: Exterior Gateway Protocol

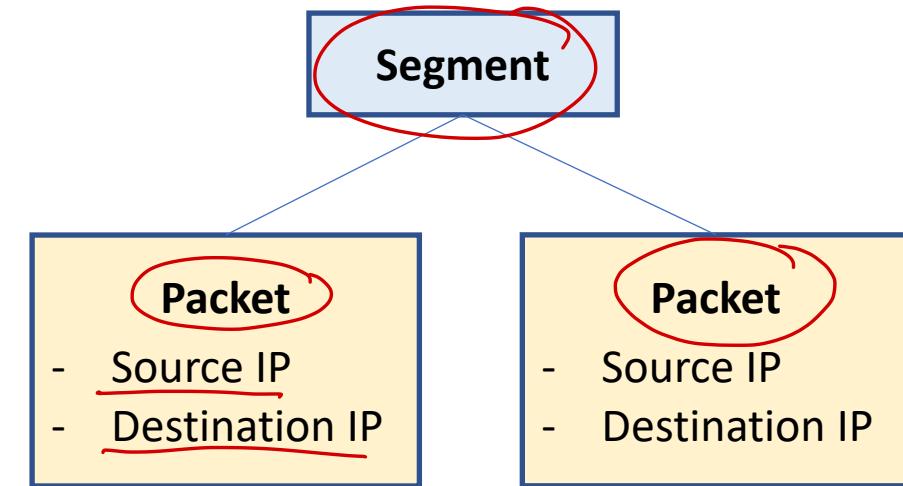

Data Link Layer

- Transfers data between
 - adjacent network nodes in a wide area network (WAN) or
 - between nodes on the same local area network (LAN) segment
- Encapsulates packet into Frames containing
 - Source MAC Address
 - Destination MAC Address
- Sublayers
 - ① ▪ Logical Link Layer
 - ② ▪ Media Access Control Layer

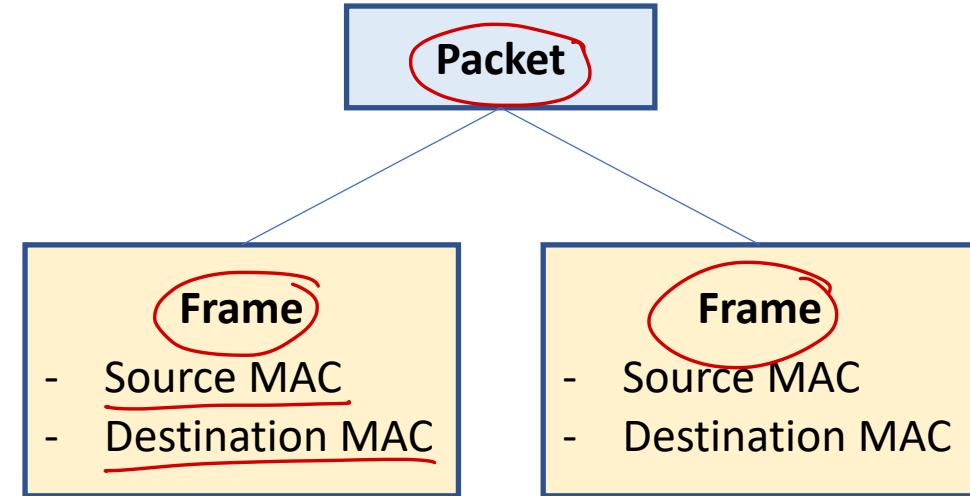

Data Link Layer: Logical Link Layer

- The uppermost sublayer multiplexes protocols running at the top of data link layer, and optionally provides flow control, acknowledgment, and error notification
- Provides addressing and control of the data link
- Services
 - Error control (automatic repeat request, ARQ)
 - Flow control [Data-link-layer flow control is not used in LAN protocols such as Ethernet, but in modems and wireless networks]



Data Link Layer: Media Access Control Layer

- Refers to the sublayer that determines who is allowed to access the media at any one time (CSMA/CD)
- Determines where one frame of data ends and the next one starts (frame synchronization)
- Frame synchronization uses: time based, character counting, byte stuffing and bit stuffing.
- Services
 - Multiple access protocols for channel-access control,
 - CSMA/CD protocols for collision detection and re-transmission in Ethernet networks
 - CSMA/CA protocol for collision avoidance in wireless networks
 - Physical addressing (MAC addressing)
 - LAN switching (packet switching), including MAC filtering, Spanning Tree Protocol (STP) and Shortest Path Bridging (SPB)
 - Data packet queuing or scheduling



Physical Layer

- Consists of the electronic circuit transmission technologies of a network
- Fundamental layer underlying the higher level functions in a network which provides means of transmitting raw bits rather than logical packets or segments
- The bitstream may be grouped into code words or symbols and converted to a physical signal that is transmitted over a transmission medium
- Translates logical communications requests from the data link layer into hardware-specific operations to cause transmission or reception of electronic signals
- Services
 - Modulation/Demodulation
 - Multiplexing
- Consists of
 - Cables/wires
 - Devices like hub, repeaters etc.



Addressing Modes: MAC Address

- Used to identify NIC uniquely
- Consists of 6 bytes [48 bits]
- First 3 bytes represents manufacturer
- Next 3 bytes represents NIC's unique address

Windows : ipconfig /all

Linux/mac os : ifconfig



Addressing Modes: IP Address

(68)

- Used to identify every device uniquely
- Set by operating system running on the device
- Can be written in
 - Decimal: 192.168.100.10
 - Binary: 11000000|10101000|01100100|00001010
- Types
 - Private: used to communicate with other devices in local network
 - Public: used to communicate with other devices over internet
- Versions
 - IPv4
 - 32 bit [4 bytes] address
 - Classful and Classless addressing
 - IPv6
 - 128 bit address



Virtualization




Software Deployment



- Software deployment defines a process of making the software available for the users
- E.g. a web site can be available for the end users, when it is hosted on a machine which can be accessed from anywhere in the world



Traditional Deployment

- Early on, organizations ran applications on physical servers
- There was no way to define resource boundaries for applications in a physical server, and this caused resource allocation issues
- For example, if multiple applications run on a physical server, there can be instances where one application would take up most of the resources, and as a result, the other applications would underperform
- A solution for this would be to run each application on a different physical server
- But this did not scale as resources were underutilized, and it was expensive for organizations to maintain many physical servers

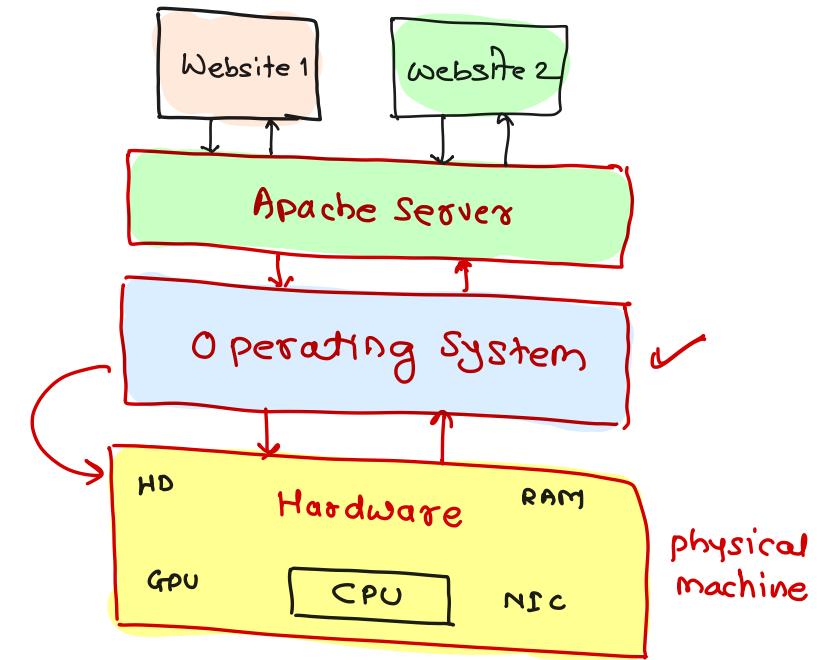

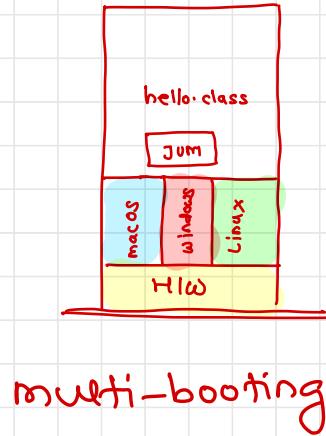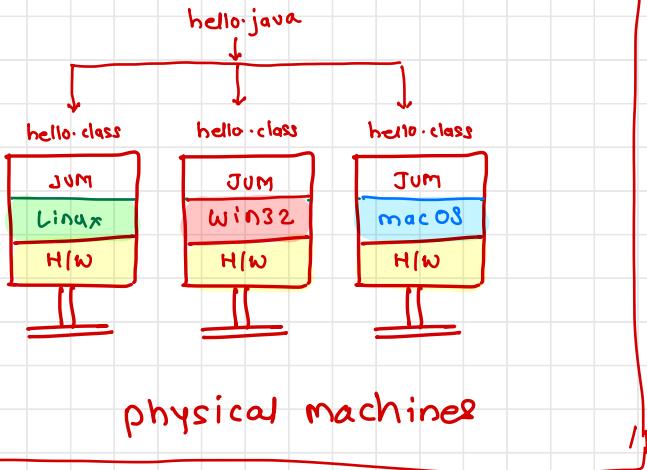

What is virtualization

- Virtualization is the creation of a virtual -- rather than actual -- version of something, such as an operating system (OS), a server, a storage device or network resources
- Virtualization uses software that simulates hardware functionality in order to create a virtual system
- This practice allows IT organizations to operate multiple operating systems, more than one virtual system and various applications on a single server
- Types
 - Network virtualization
 - Storage virtualization
 - Data virtualization
 - Desktop virtualization
 - Application virtualization
 - Hardware virtualization



Network Virtualization

- Network virtualization takes the available resources on a network and breaks the bandwidth into discrete channels
- Admins can secure each channel separately, and they can assign and reassign channels to specific devices in real time
- The promise of network virtualization is to improve networks' speed, availability and security, and it's particularly useful for networks that must support unpredictable usage bursts



Storage Virtualization

- Storage virtualization is the pooling of physical storage from multiple network storage devices into what appears to be a single storage device that is managed from a central console
- Storage virtualization is commonly used in storage area networks
- Applications can use storage without having any concern for where it resides, what technical interface it provides, how it has been implemented, which platform it uses and how much of it is available
- Benefits
 - Makes the remote storage devices appear local
 - Multiple smaller volumes appear as a single large volume
 - Data is spread over multiple physical disks to improve reliability and performance (RAID)
 - All operating systems use the same storage device
 - Provided high availability, disaster recovery, improved performance and sharing




Data virtualization

- Data virtualization is the process of aggregating data from different sources of information to develop a single, logical and virtual view of information so that it can be accessed by front-end solutions such as applications, dashboards and portals without having to know the data's exact storage location
- The process of data virtualization involves abstracting, transforming, federating and delivering data from disparate sources
- The main goal of data virtualization technology is to provide a single point of access to the data by aggregating it from a wide range of data sources
- Benefits
 - Abstraction of technical aspects of stored data like APIs, Language, Location, Storage structure
 - Provides an ability to connect multiple data sources from a single location
 - Provides an ability to combine the data result sets across multiple sources (also known as data federation)
 - Provides an ability to deliver the data as requested by users



GET
PUT
POST
DELETE



N/W

http://api.myapp.com

REST

JSON
XML



MySQL

REST




Mongo



Desktop virtualization

- With desktop virtualization, the goal is to isolate a desktop OS from the endpoint that employees use to access it
- It provides an ability to connect to the desktop from remote site
- When multiple users connect to a shared desktop, as is the case with Microsoft Remote Desktop Services, it's known as shared hosted desktop virtualization

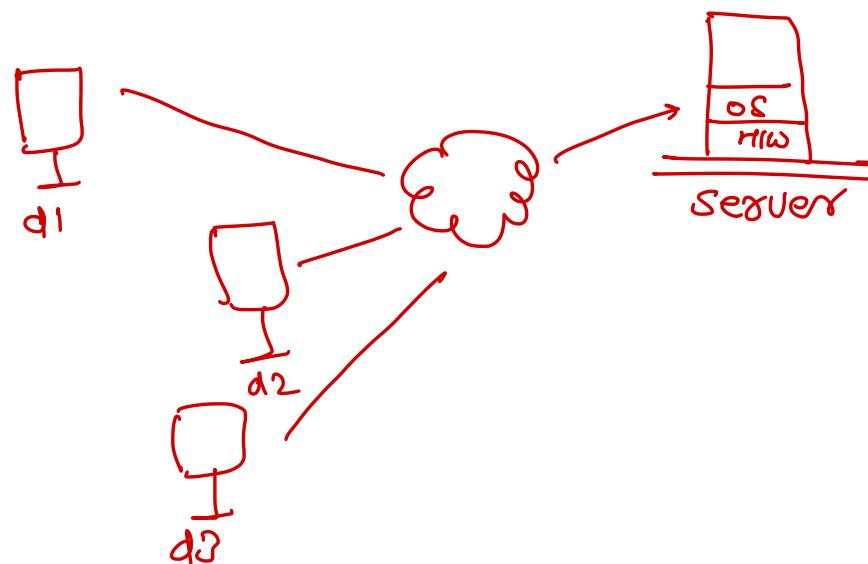

Application Virtualization

- With application virtualization, an app runs separately from the device that accesses it
- Application virtualization makes it possible for IT admins to install, patch and update only one version of an app rather than performing the same management tasks multiple times




Hardware Virtualization

[simulating Hardware]


- Hardware virtualization or platform virtualization refers to the creation of a virtual machine that acts like a real computer with an operating system
- The process of masking the hardware resources like
 - CPU
 - Storage
 - Memory
- For example, a computer that is running Microsoft Windows may host a virtual machine that looks like a computer with the Ubuntu Linux operating system; Ubuntu-based software can be run on the virtual machine
- The process of creating Machines



Type I

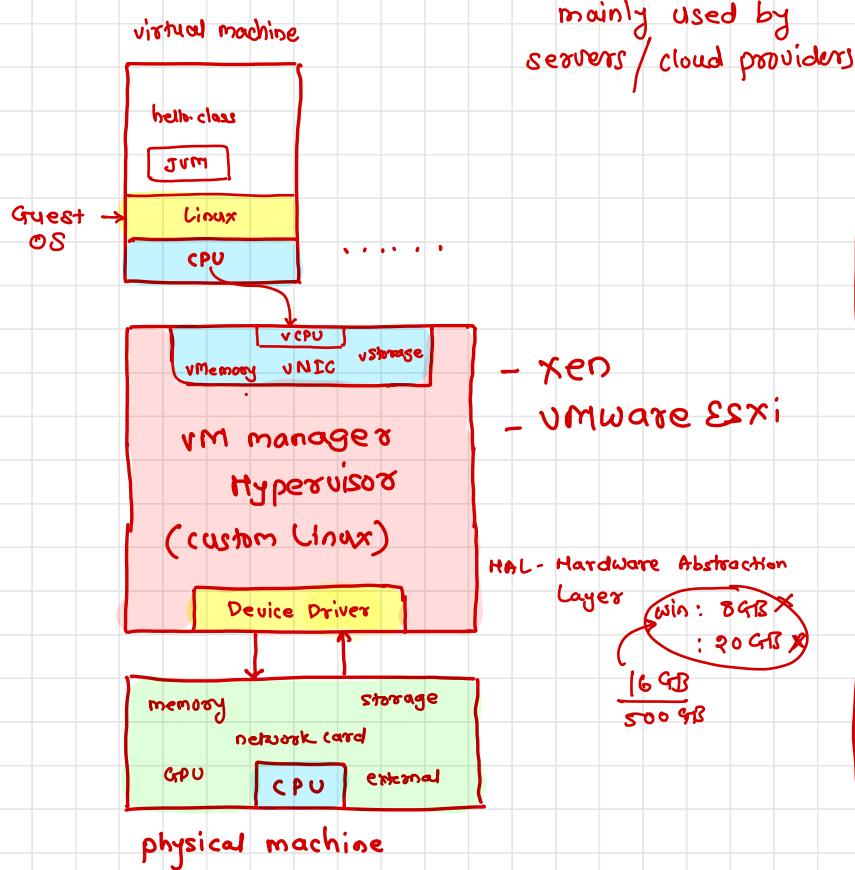

Type II

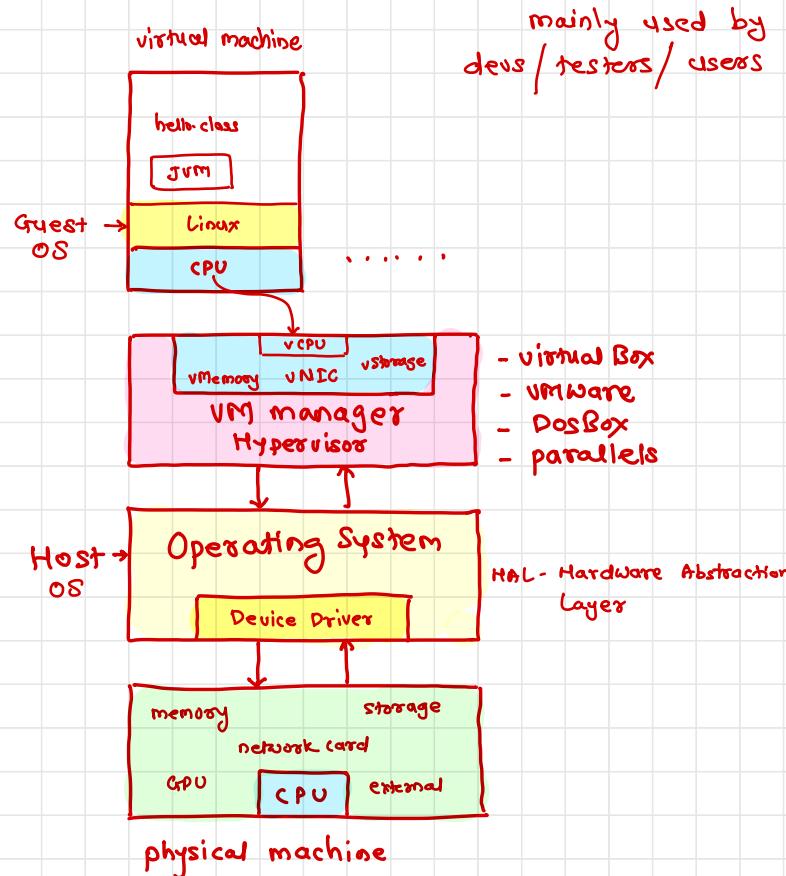

Virtual Machine

- A virtual machine is the emulated equivalent of a computer system that runs on top of another system
- Virtual machines may have access to any number of resources
 - Computing power - through hardware-assisted but limited access to the host machine's CPU
 - Memory - one or more physical or virtual disk devices for storage
 - A virtual or real network interfaces
 - Any devices such as
 - video cards,
 - USB devices,
 - other hardware that are shared with the virtual machine
- If the virtual machine is stored on a virtual disk, this is often referred to as a disk image



Types of hardware virtualization

Type I

- A Type 1 hypervisor runs directly on the host machine's physical hardware, and it's referred to as a bare-metal hypervisor
- It doesn't have to load an underlying OS first
- With direct access to the underlying hardware and no other software, it is more efficient and provides better performance
- It is best suited for enterprise computing or data centers
- E.g. VMware ESXi, Microsoft Hyper-V server and open source KVM

Type II


Host OS

- A Type 2 hypervisor is typically installed on top of an existing OS, and it's called a hosted hypervisor
- It relies on the host machine's pre-existing OS to manage calls to CPU, memory, storage and network resources
- E.g. VMware Fusion, Oracle VM VirtualBox, Oracle VM Server for x86, Oracle Solaris Zones, Parallels and VMware Workstation



Virtualized Deployment

- It allows you to run multiple Virtual Machines (VMs) on a single physical server's CPU
- Virtualization allows applications to be isolated between VMs and provides a level of security as the information of one application cannot be freely accessed by another application
- Virtualization allows better utilization of resources in a physical server and allows better scalability because
 - an application can be added or updated easily
 - reduces hardware costs
- With virtualization you can present a set of physical resources as a cluster of disposable virtual machines
- Each VM is a full machine running all the components, including its own operating system, on top of the virtualized hardware

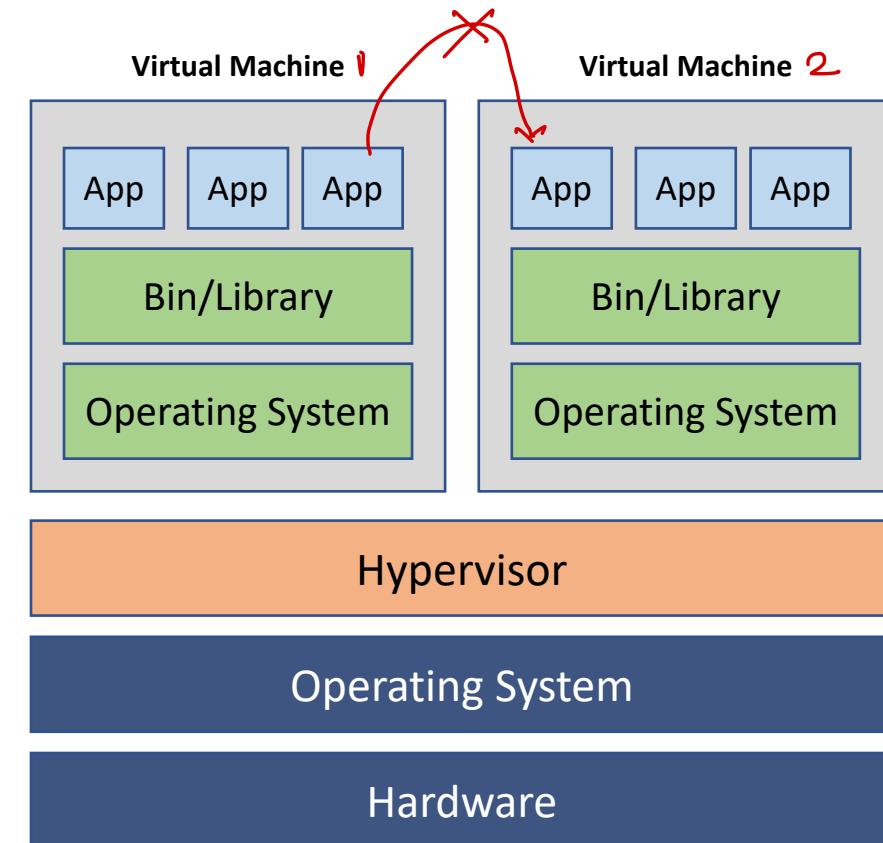

Advantages of virtualization

Lower costs

- Virtualization reduces the amount of hardware servers necessary within a company and data center
- This lowers the overall cost of buying and maintaining large amounts of hardware

Easier disaster recovery

- Disaster recovery is very simple in a virtualized environment
- Regular snapshots provide up-to-date data, allowing virtual machines to be feasibly backed up and recovered
- Even in an emergency, a virtual machine can be migrated to a new location within minutes

Easier testing

- Testing is less complicated in a virtual environment
- Even if a large mistake is made, the test does not need to stop and go back to the beginning
- It can simply return to the previous snapshot and proceed with the test.



Advantages of virtualization

■ Quicker backups

- Backups can be taken of both the virtual server and the virtual machine
- Automatic snapshots are taken throughout the day to guarantee that all data is up-to-date
- Furthermore, the virtual machines can be easily migrated between each other and efficiently redeployed

■ Improved productivity

- Fewer physical resources results in less time spent managing and maintaining the servers
- Tasks that can take days or weeks in a physical environment can be done in minutes
- This allows staff members to spend the majority of their time on more productive tasks, such as raising revenue and fostering business initiatives



Cloud




Computing Model

- ✓ Desktop computing
- ✓ Client-Server computing
- ✓ Cluster computing
- ✓ Grid computing
- Cloud Computing ✓





Pre-desktop

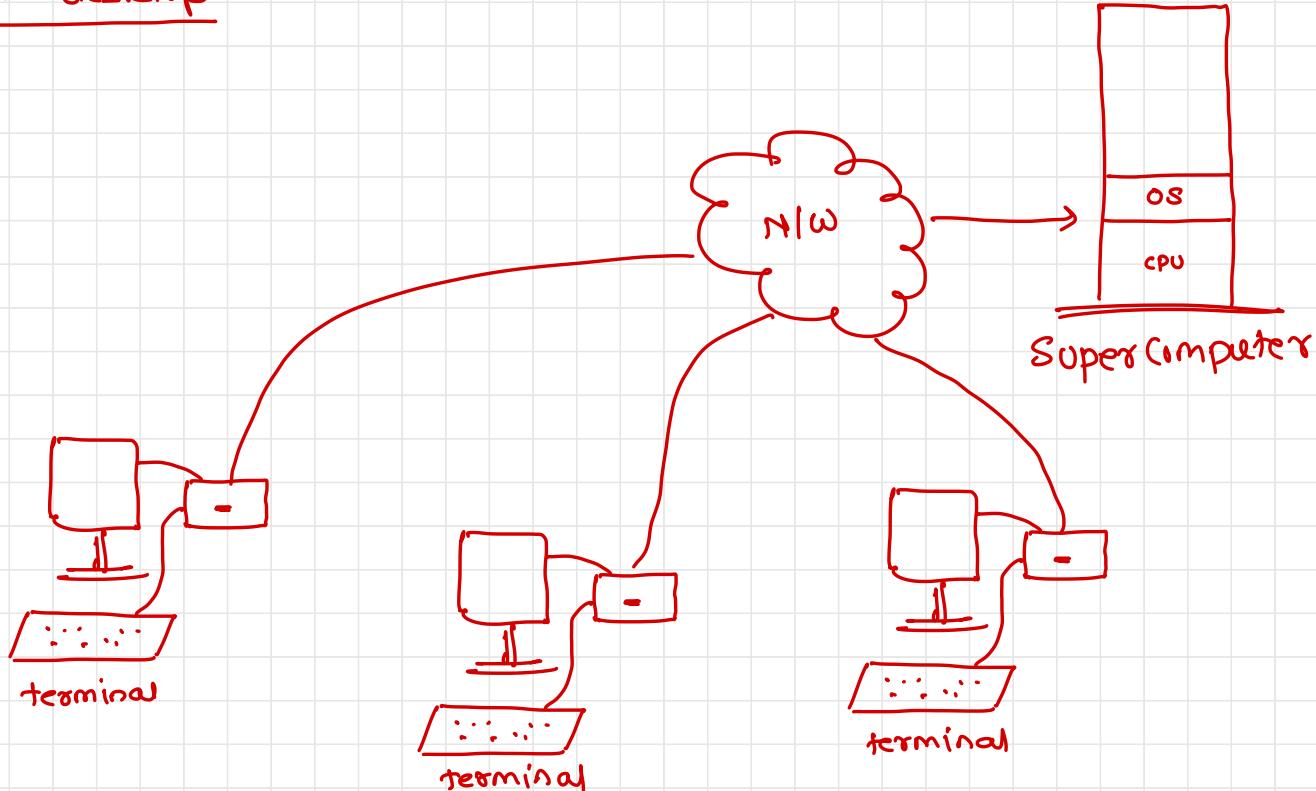


Desktop computing

personal computer

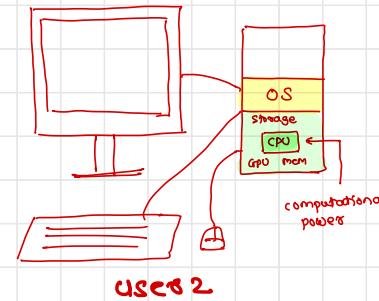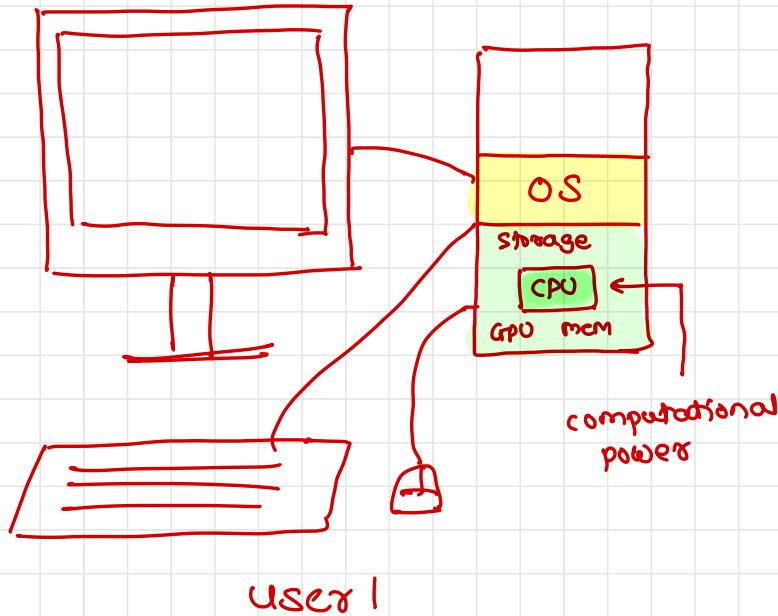


User 2

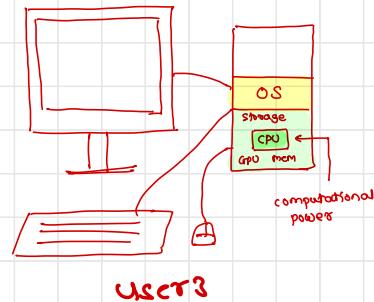


User 3

client-server computing

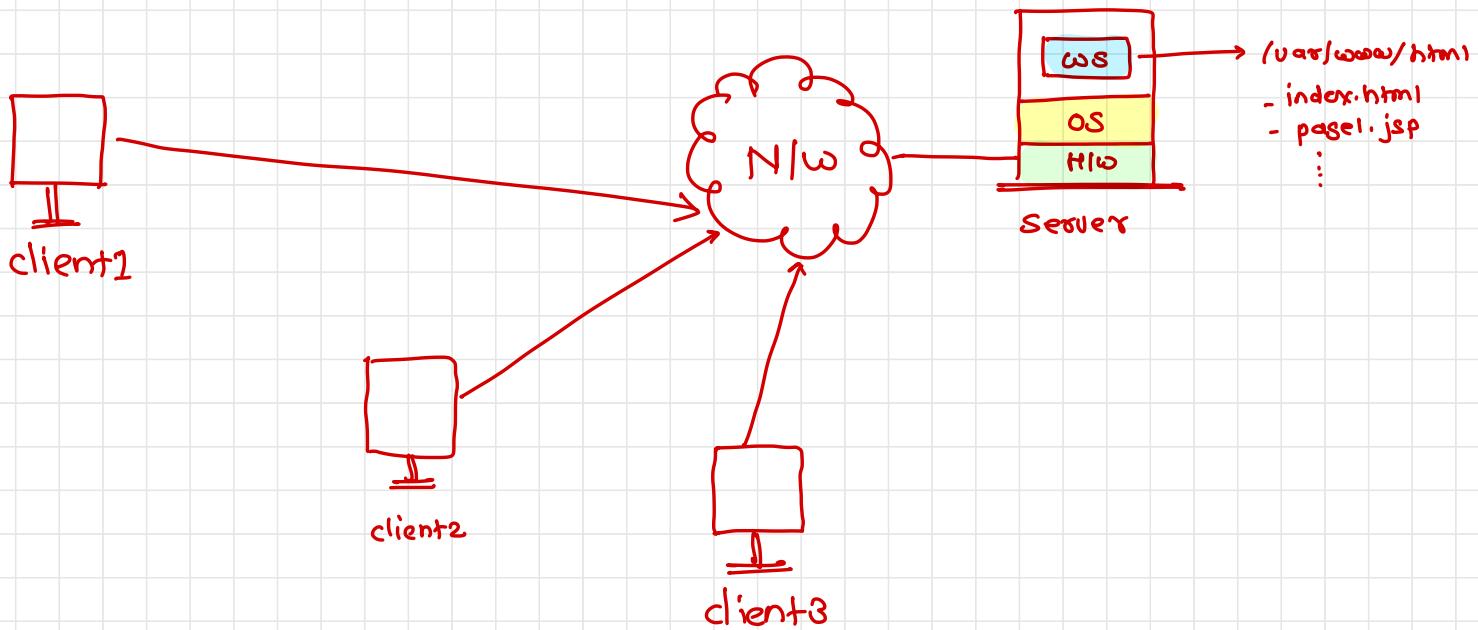


cluster computing


Highly available

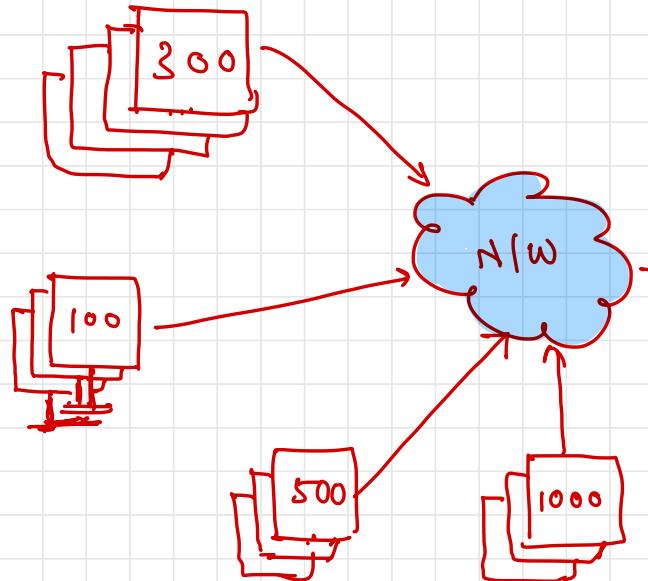

Horizontal scaling

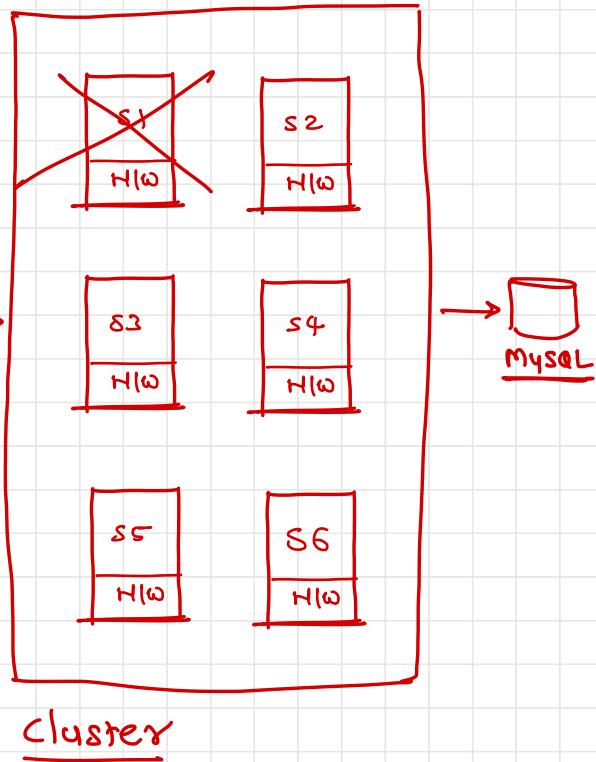


$$10L + 10L + 20L$$

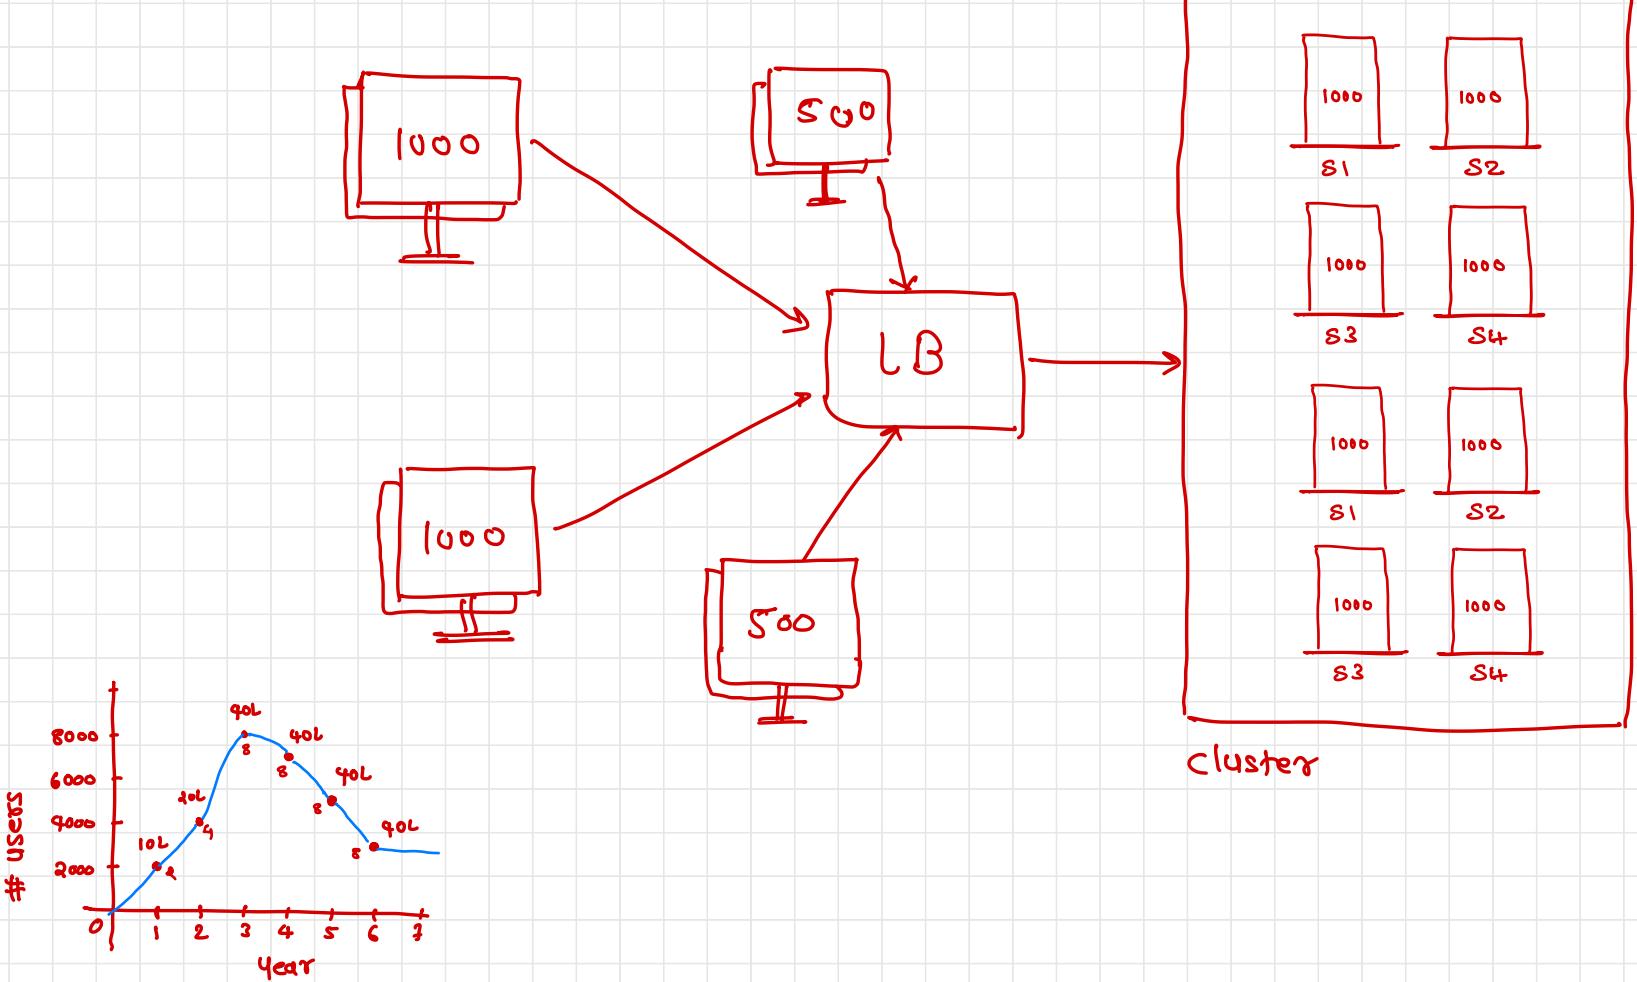

Closed computing

$$\$10 = \$120$$

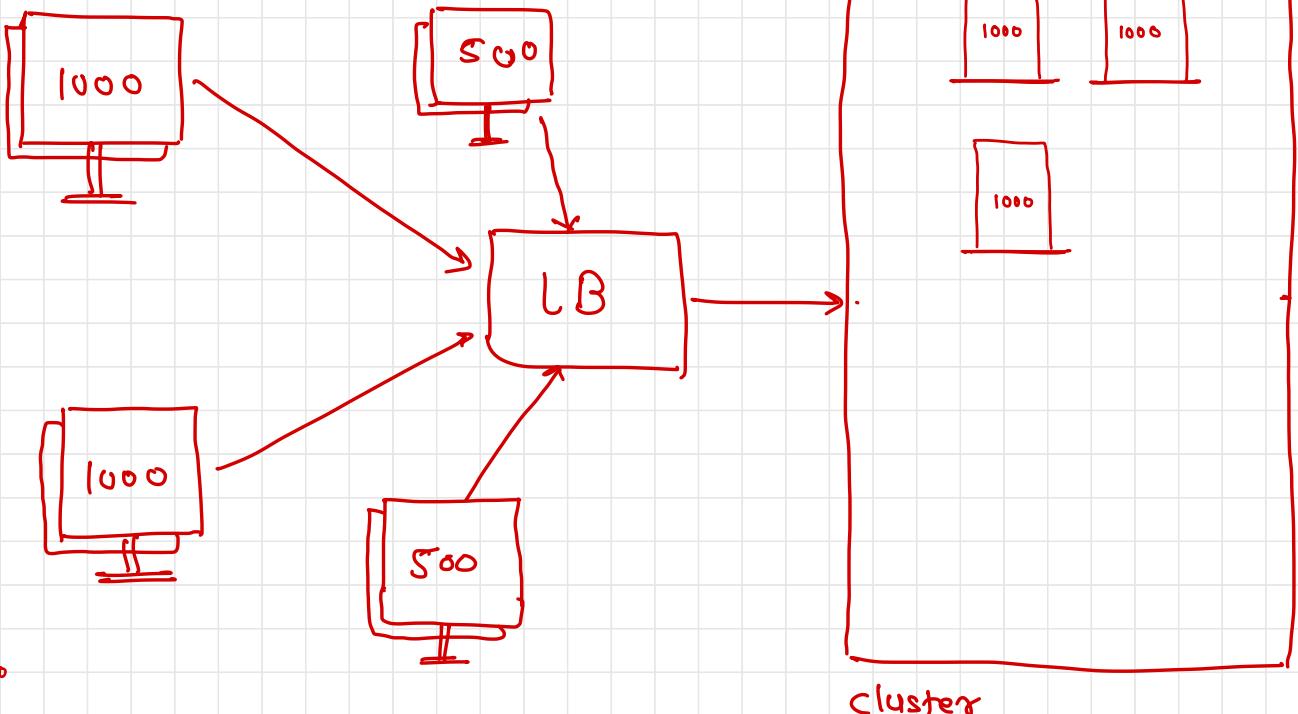

What is cloud computing ?

- The practice of using a network of remote servers hosted on the Internet to store, manage, and process data, rather than a local server or a personal computer.
- Is the delivery of on-demand computing resources – everything from data centers over the internet on a pay for use basis
- Cloud computing is an umbrella term used to refer to Internet based development and services



What is Data Center ?

- Where your IT devices and applications are located
- For a non-technical person it is the cloud where the user's files/data is stored
- Components
 - Servers
 - Security
 - WAN
 - Storage
 - File Sharing



1-rack server - 10 TB

$$1 \text{ rack} = 10 \text{ servers} = 10 \times 10 = 100 \text{ TB}$$

$$1 \text{ row} = 100 \text{ racks} = 100 \times 100 = 10000 \text{ TB}$$

$$1 \text{ room} = 50 \text{ rows} = 50 \times 10000 = 500000 \text{ TB}$$

$$1 \text{ floor} = 10 \text{ rooms} = 10 \times 5 \times 10^5 = 5 \times 10^6 \text{ TB}$$

$$1 \text{ building} = 10 \text{ floors} = 10 \times 5 \times 10^6 = 5 \times 10^7 \text{ TB}$$

$$1 \text{ data centers} = 5 \text{ buildings} = 5 \times 5 \times 10^7 = 25 \times 10^7 \text{ TB}$$

$$\left. \begin{array}{l} 1 \text{ zone} = 3 \text{ data centers} = 8 \times 25 \times 10^7 = 75 \times 10^7 \text{ TB} \\ 1 \text{ region} = 2 \text{ zones} = 2 \times 75 \times 10^7 = 150 \times 10^7 = 15 \times 10^8 \text{ TB} \\ 1 \text{ cloud provider} = 40 \text{ regions} = 40 \times 15 \times 10^8 = 6 \times 10^{10} \text{ TB} \end{array} \right\}$$

What is Virtualization ?

- Refers to the act of creating a virtual (rather than actual) version of something, including virtual computer hardware platforms, storage devices, and computer network resources
- Types
 - Type I
 - Type II
 - Containerization (docker)



Terminologies

Scalability

- refers to the idea of a system in which every application or piece of infrastructure can be expanded to handle increased load

Elasticity

- the degree to which a system is able to adapt to workload changes by provisioning and de-provisioning resources in an autonomic manner, such that at each point in time the available resources match the current demand as closely as possible

Availability

- refers to the ability of a user to access information or resources in a specified location and in the correct format

Information Assurance


- availability, integrity, authentication, confidentiality and nonrepudiation

On-demand service

- A model by which a customer can purchase cloud services as needed



Service Models

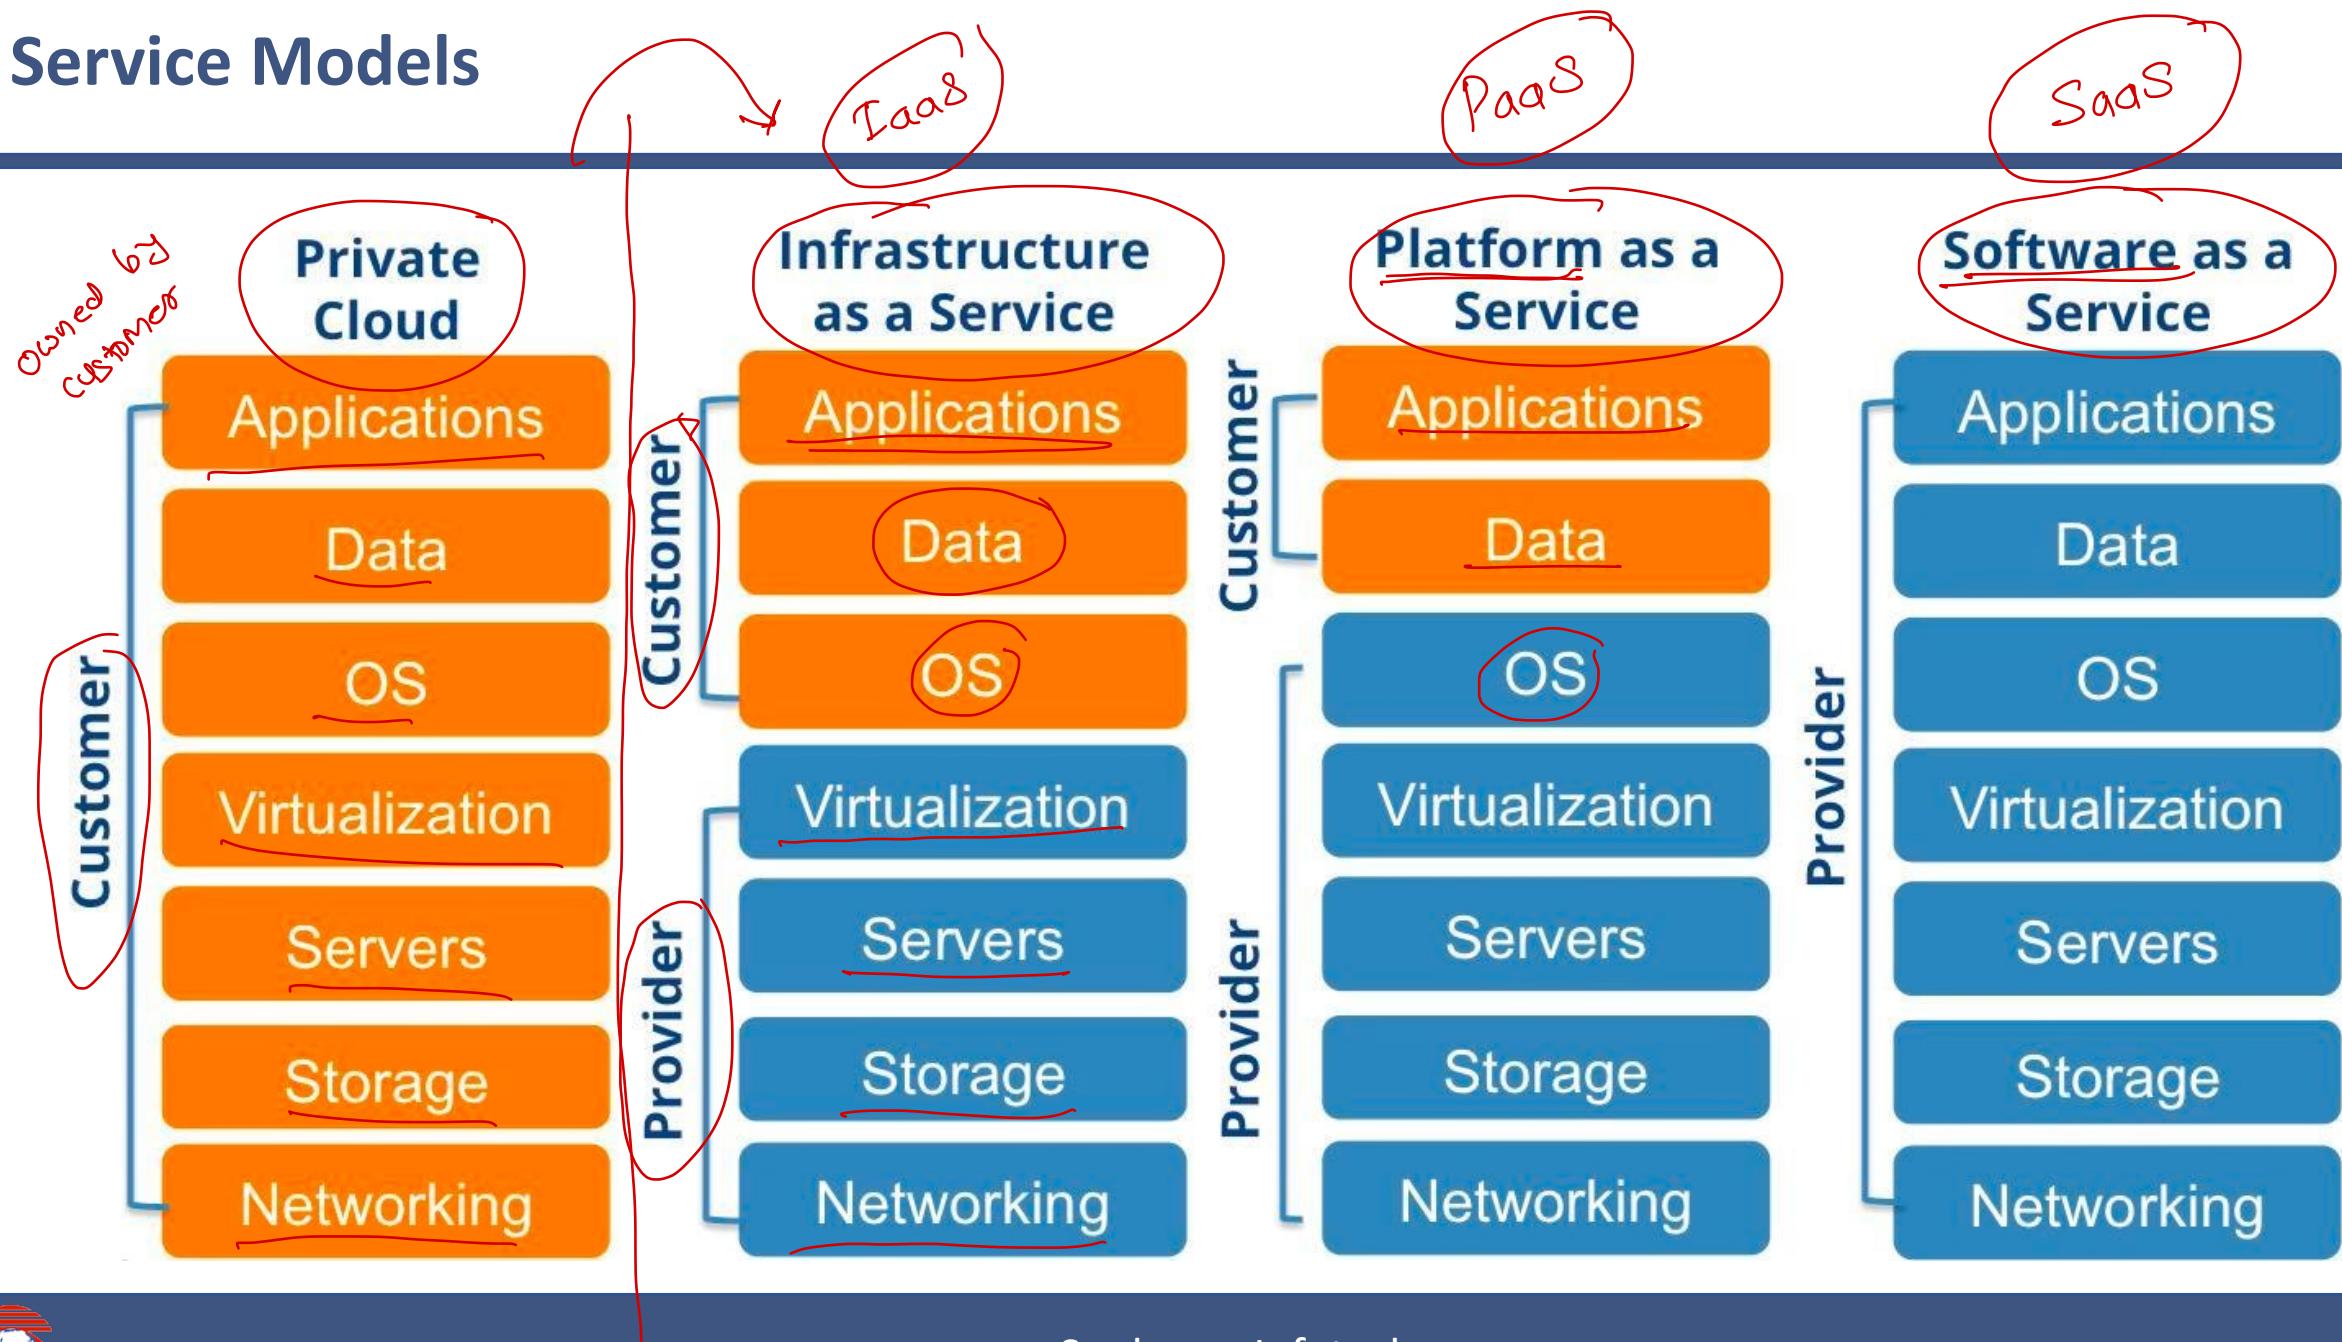

Service Models

Software
as a Service (SaaS)



Google Apps,
Facebook, YouTube,
Dropbox, Google Photos

Platform
as a Service (PaaS)



Google App Engine,
Amazon Simple DB, S3,
Microsoft Azure

Infrastructure
as a Service (IaaS)



Amazon EC2,
Google Compute VM,
Azure VM



Data Center



Service Models: IaaS

- Infrastructure as a Service
- Allocates virtualized computing resources to the user through the internet
- IaaS is completely provisioned and managed over the internet
- helps the users to avoid the cost and complexity of purchasing and managing their own physical servers
- Every resource of IaaS is offered as an individual service component and the users only have to use the particular one they need
- The cloud service provider manages the IaaS infrastructure while the users can concentrate on installing, configuring and managing their software
- Generally meant for operations team to setup the required infrastructure
- Benefits
 - Time and cost savings: more installation and maintenance of IT hardware in-house,
 - Better flexibility: On-demand hardware resources that can be tailored to your needs,
 - Remote access and resource management.



Service Models: PaaS

- Provides a platform allowing customers to develop, run, and manage applications without the complexity of building and maintaining the infrastructure typically associated with developing and launching an app
- Generally meant for developers
- Benefits
 - Mastering the installation and development of software applications
 - Time saving and flexibility for development projects: no need to manage the implementation of the platform, instant production
 - Data security: You control the distribution, protection, and backup of your business data



Service Models: SaaS

- Software as a Service
- Software distribution model in which a third-party provider hosts applications and makes them available to customers over the Internet
- User wont know which computer or operating system or infrastructure is used to host the software
- Generally meant for end user
- Benefits
 - You are entirely free from the infrastructure management and aligning software environment: no installation or software maintenance
 - You benefit from automatic updates with the guarantee that all users have the same software version
 - It enables easy and quicker testing of new software solutions.



Cloud Computing Characteristics

- Rapid Elasticity
- On Demand Self Service
- Broad Network Access
- Location Independent Resource Sharing
- Measured Services



Cloud Deployment Models: Public

- Supports all users who want to make use of a computing resource, such as hardware (OS, CPU, memory, storage) or software (application server, database) on a subscription basis
- Most common uses of public clouds are for application development and testing, tasks such as file-sharing, and e-mail service
- Requires internet to access the resources



Cloud Deployment Models: Private

- Typically infrastructure used by a single organization
- Such infrastructure may be managed by the organization itself to support various user groups, or it could be managed by a service provider that takes care of it either on-site or off-site
- Private clouds are more expensive than public clouds due to the capital expenditure involved in acquiring and maintaining them
- However, private clouds are better able to address the security and privacy concerns of organizations



Cloud Deployment Models: Hybrid

- Organization makes use of interconnected private and public cloud infrastructure
- Many organizations make use of this model when they need to scale up their IT infrastructure rapidly, such as when leveraging public clouds to supplement the capacity available within a private cloud
- For example, if an online retailer needs more computing resources to run its Web applications during the holiday season it may attain those resources via public clouds.



Cloud Services

- Compute: used to create the Virtual Machine
- Storage: used to provide the storage
- Database: RDBMS + No SQL
- Security and Identity Management
- Media Services
- Machine Learning
- Cost Management
- Application Integration



Advantages

- Lower computer costs
- Improved performance
- Reduced software costs
- Instant software updates
- Improved document format compatibility
- Unlimited storage capacity
- Increased data reliability
- Universal document access
- Latest version availability



Disadvantages

- Requires a constant Internet connection
- Does not work well with low-speed connections
- Features might be limited
- Stored data might not be secure
- Stored data can be lost
- Each cloud systems uses different protocols and different APIs



Cloud Providers

- Amazon Web Services
- Google Cloud Platform
- Microsoft Azure
- Rackspace
- DigitalOcean
- Alibaba Cloud
- Oracle Cloud
- IBM Cloud



AWS



Sunbeam Infotech


www.sunbeaminfo.com

What is AWS ?


- AWS stands for Amazon Web Services
- Platform that offers flexible, reliable, scalable, easy-to-use and cost-effective cloud computing solutions
- Amazon's cloud implementation
- It's a combination of IaaS, PaaS and SaaS offerings



Traditional vs AWS

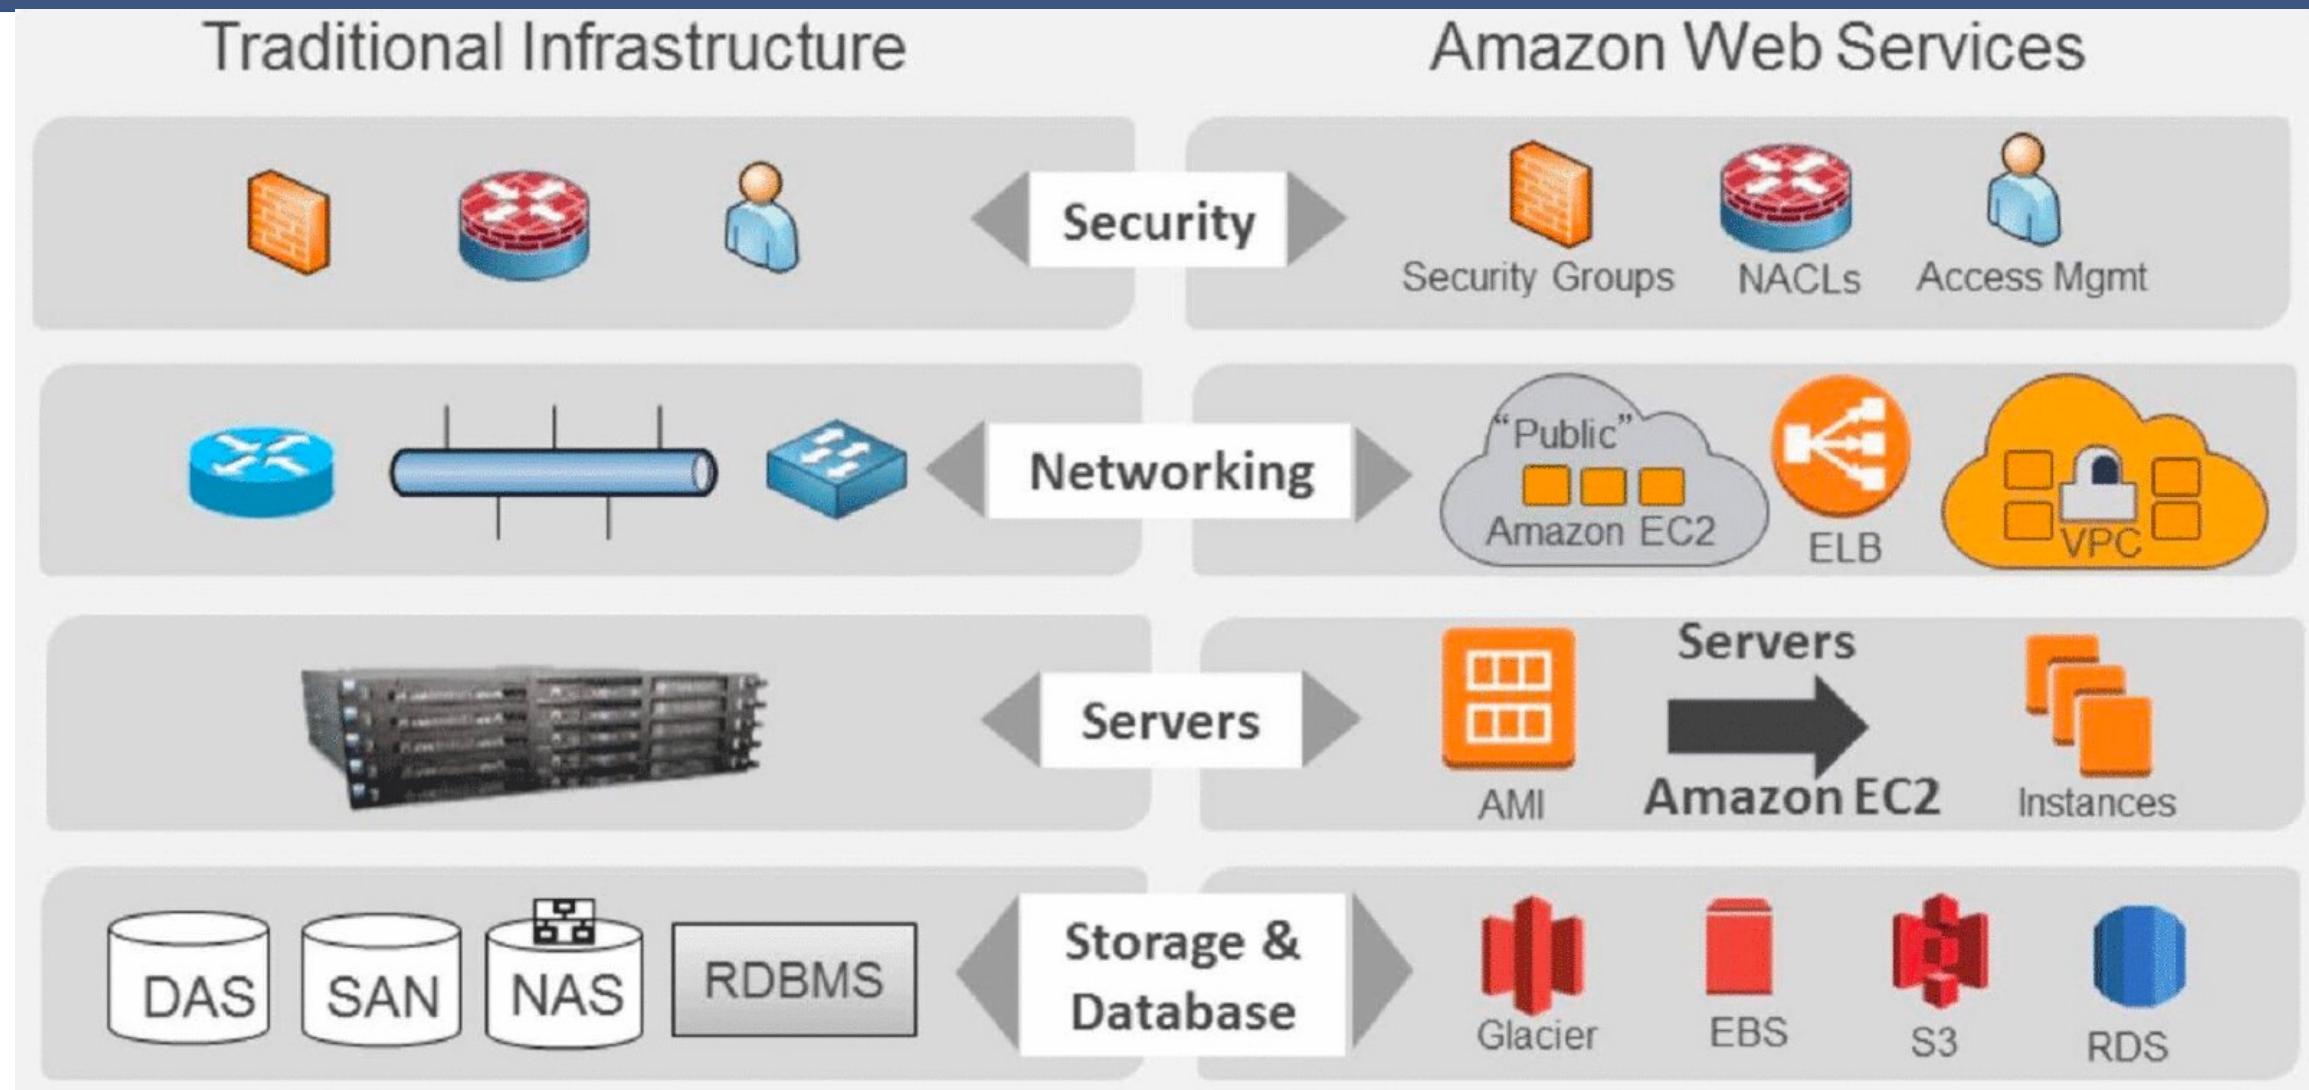

AWS Services

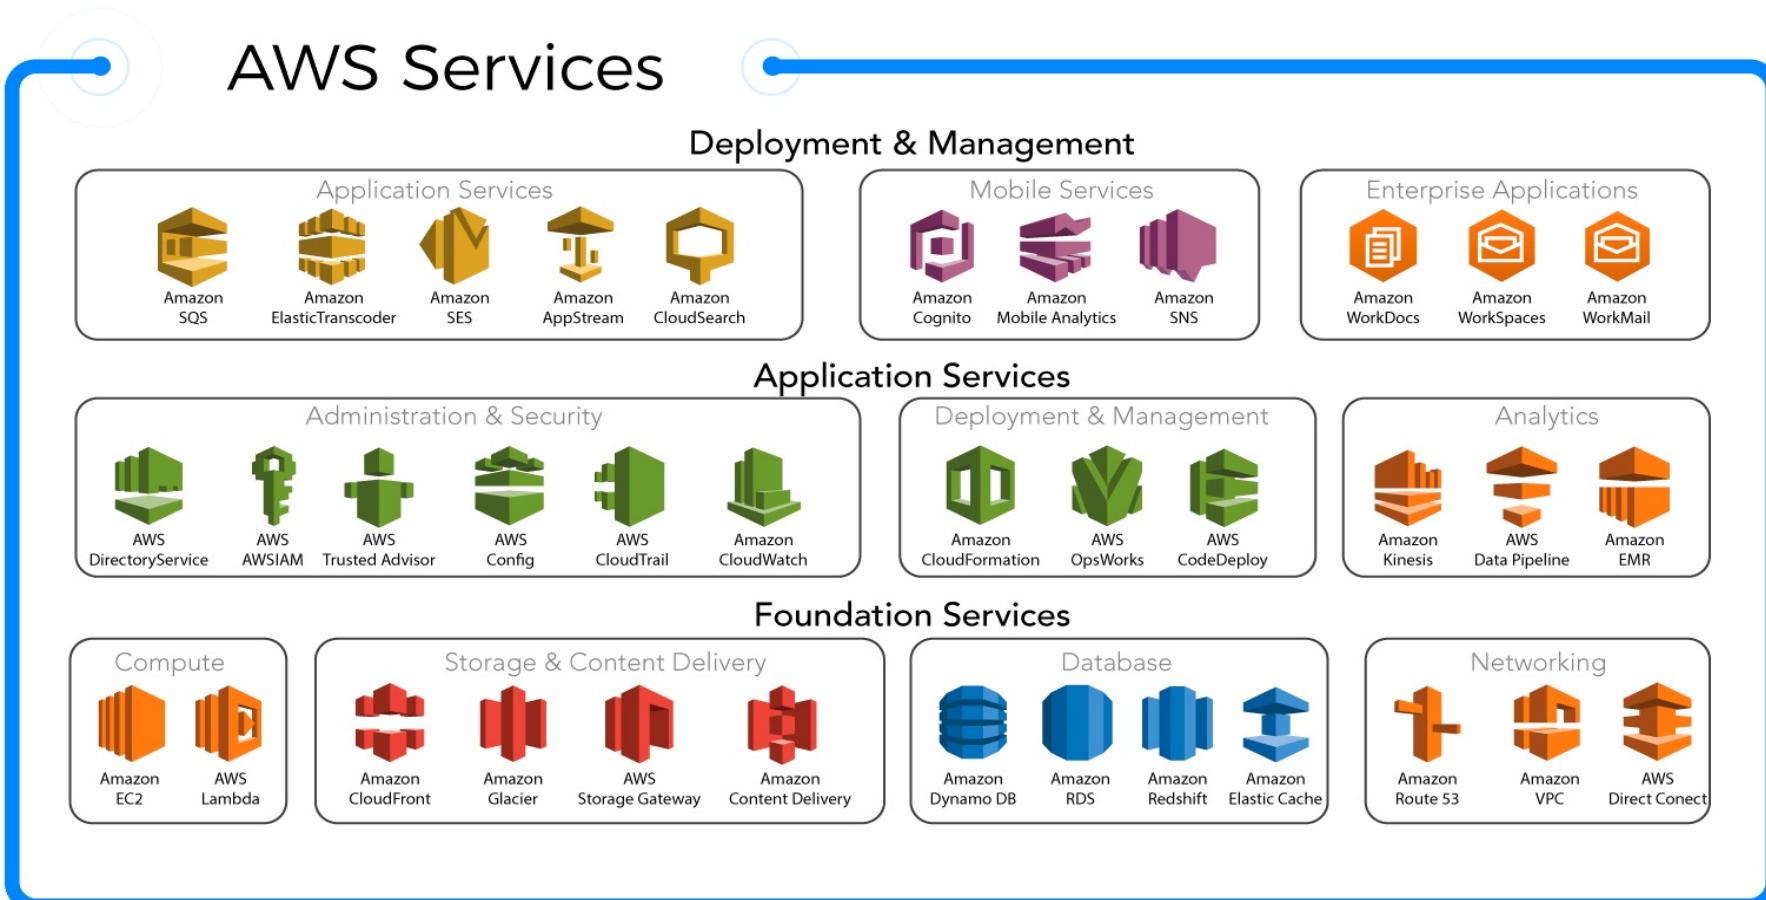

Global Infrastructure: Region

- Geographic area having availability zone(s)
- Collection of availability zones that are geographically located close to one other
- Every Region will act independently of the others, and each will contain at least two Availability Zones
- E.g.
 - US East: N. Virginia, Ohio
 - US West: N. California, Oregon
 - Asia Pacific: Mumbai, Seoul, Singapore, Sydney, Tokyo



Global Infrastructure: Availability Zone

- Essentially the physical data centers of AWS
- This is where the actual compute, storage, network, and database resources are hosted that we as consumers provision within our Virtual Private Clouds (VPCs)
- Availability Zones are always referenced by their Code Name, which is defined by the AZs Region Code Name that the AZ belongs to, followed by a letter
- E.g.
 - the AZs within the eu-west-1 region (EU Ireland), are
 - eu-west-1a
 - eu-west-1b
 - eu-west-1c



Global Infrastructure: Edge Locations

- Edge Locations are AWS sites deployed in major cities and highly populated areas across the globe
- Generally used to cache data and reduce latency for end-user access by using the Edge Locations as a global Content Delivery Network (CDN)
- Edge Locations are primarily used by end users who are accessing and using your services
- E.g.
 - Route 53: DNS Lookup
 - CloudFront
 - Content Delivery Network (CDN)
 - Cached contents, streaming distribution, acceleration



EC2



Sunbeam Infotech

www.sunbeaminfo.com

EC2

- Amazon Elastic Compute Cloud (Amazon EC2) is a web service that provides resizable compute capacity in the cloud
- It is a virtual machine you will be building in the cloud
- EC2 instances are designed to mimic traditional on-premise servers, but with the ability to be commissioned and decommissioned on-demand for easy scalability and elasticity
- EC2 supports variety of operating systems:
 - Linux: Amazon Linux, Ubuntu, Red Hat Enterprise, SUSE Linux Enterprise Server, Fedora, Debian, CentOS, Gentoo Linux, Oracle Linux, FreeBSD
 - Windows: Windows Server, Windows
- Every instance comprised of
 - Amazon Machine Image (AMI)
 - Instance type
 - Network Interface
 - Storage



Step 1 - Choose AMI

The screenshot shows the AWS Launch Instance Wizard Step 1: Choose an Amazon Machine Image (AMI) page. The page title is "Step 1: Choose an Amazon Machine Image (AMI)". The navigation bar includes tabs for "1. Choose AMI", "2. Choose Instance Type", "3. Configure Instance", "4. Add Storage", "5. Add Tags", "6. Configure Security Group", and "7. Review". The "1. Choose AMI" tab is selected.

The main content area displays a list of available AMIs:

Image Type	AMI Name	Description	Action
Windows	Microsoft Windows Server 2012 R2 with SQL Server 2016 Enterprise - ami-02c96bdc8f851187b	Microsoft Windows Server 2012 R2 Standard edition, 64-bit architecture, Microsoft SQL Server 2016 Enterprise edition. [English] Root device type: ebs Virtualization type: hvm ENA Enabled: Yes	Select 64-bit (x86)
Windows	Microsoft Windows Server 2012 Base - ami-0f83e0a40f08208db	Microsoft Windows 2012 Standard edition with 64-bit architecture. [English] Root device type: ebs Virtualization type: hvm ENA Enabled: Yes	Select 64-bit (x86)
Windows	Microsoft Windows Server 2008 R2 Base - ami-094c0d39ab684c29a	Microsoft Windows 2008 R2 SP1 Datacenter edition, 64-bit architecture. [English] Root device type: ebs Virtualization type: hvm ENA Enabled: Yes	Select 64-bit (x86)
Amazon Linux	Amazon Linux 2 LTS with SQL Server 2017 Standard - ami-0da21cbc0d899ebc7	Microsoft SQL Server 2017 Standard edition on Amazon Linux 2 LTS. The AMI also comes pre-installed with .NET Core 2.0 and PowerShell 6.0. Root device type: ebs Virtualization type: hvm ENA Enabled: Yes	Select 64-bit (x86)
Ubuntu	Ubuntu Server 16.04 LTS (HVM) with SQL Server 2017 Standard - ami-66ca1419	Microsoft SQL Server 2017 Standard edition on Ubuntu Server 16.04 LTS. The AMI also comes pre-installed with .NET Core 2.0 and PowerShell 6.0. Root device type: ebs Virtualization type: hvm ENA Enabled: Yes	Select 64-bit (x86)
Amazon Linux	.NET Core 2.1 with Amazon Linux 2 - Version 1.0 - ami-0e24aee0334f94155	.NET Core 2.1 and the PowerShell 6.0 pre-installed to run your .NET Core applications on Amazon Linux 2 with Long Term Support (LTS). Root device type: ebs Virtualization type: hvm ENA Enabled: Yes	Select 64-bit (x86)
Ubuntu	.NET Core 2.1 with Ubuntu Server 18.04 - Version 1.0 - ami-e24b7d9d	.NET Core 2.1 and the PowerShell 6.0 pre-installed to run your .NET Core applications on Ubuntu 18.04 with Long Term Support. Root device type: ebs Virtualization type: hvm ENA Enabled: Yes	Select 64-bit (x86)

At the bottom of the page, there are links for "Feedback", "English (US)", "Privacy Policy", and "Terms of Use".



Amazon Machine Image (AMI)

- Operating System used to create virtual machine (EC2 instance)
- AMI are built for a specific region
- You can copy an AMI from one region to another
- You can also create a custom AMI with required applications/configuration
- AMI contains
 - Template for root volume
 - Launch permissions that control which account can use the AMI
 - EBS mapping that specifies the volume(s) to attach the instance when its launched
- AMI comes into two types
 - Instance store backed AMI
 - EBS backed AMI



Step 2 - Instance Type

The screenshot shows the AWS Launch Instance Wizard Step 2: Choose an Instance Type page. The URL is <https://console.aws.amazon.com/ec2/v2/home?region=us-east-1#LaunchInstanceWizard>. The page displays a table of instance types under the 'General purpose' family, filtered to show 'All instance types' and 'Current generation'. The 't2.micro' instance type is selected, highlighted with a green border, and labeled 'Free tier eligible'. The table includes columns for Family, Type, vCPUs, Memory (GiB), Instance Storage (GB), EBS-Optimized Available, Network Performance, and IPv6 Support.

	Family	Type	vCPUs	Memory (GiB)	Instance Storage (GB)	EBS-Optimized Available	Network Performance	IPv6 Support
	General purpose	t2.nano	1	0.5	EBS only	-	Low to Moderate	Yes
	General purpose	t2.micro Free tier eligible	1	1	EBS only	-	Low to Moderate	Yes
	General purpose	t2.small	1	2	EBS only	-	Low to Moderate	Yes
	General purpose	t2.medium	2	4	EBS only	-	Low to Moderate	Yes
	General purpose	t2.large	2	8	EBS only	-	Low to Moderate	Yes
	General purpose	t2.xlarge	4	16	EBS only	-	Moderate	Yes
	General purpose	t2.2xlarge	8	32	EBS only	-	Moderate	Yes
	General purpose	t3.nano	2	0.5	EBS only	Yes	Up to 5 Gigabit	Yes
	General purpose	t3.micro	2	1	EBS only	Yes	Up to 5 Gigabit	Yes
	General purpose	t3.small	2	2	EBS only	Yes	Up to 5 Gigabit	Yes
	General purpose	t3.medium	2	4	EBS only	Yes	Up to 5 Gigabit	Yes
	General purpose	t3.large	2	8	EBS only	Yes	Up to 5 Gigabit	Yes
	General purpose	t3.xlarge	4	16	EBS only	Yes	Up to 5 Gigabit	Yes

Buttons at the bottom include: Cancel, Previous, Review and Launch (highlighted in blue), and Next: Configure Instance Details.



Instance Type

- Used to decide the EC2 instance configuration
- AWS provides various instance types [<https://aws.amazon.com/ec2/instance-types/>]
 - General purpose: A (ARM), T (Cheapest), M (Main)
 - Compute optimized: C (Compute)
 - Memory optimized: R (RAM), X (Extreme RAM), Z (High compute and memory)
 - Accelerated computing: P (Picture-GPU), G (Graphics), F (Fast)
 - Storage optimized: I (IOPS), D (Data), H (High Disk Throughput)



Instance Types

Type	Category	Description	Use Cases
M5	General Purpose	Balance of compute, memory and network resources	Mid-sized databases
C5	Compute Optimized	Advanced CPUs	Modelling, Analytics
H1	Storage Optimized	Local HDD Storage	Map Reduce
R4	Memory Optimized	More RAM for \$	In-memory caching
X1	Memory Optimized	Terabytes of RAM and SSD	In-memory database
I3	IO Optimized	Local SSD storage, high IOPS	NoSQL databases
G3	GPU Graphics	GPUs with video encoders	3d rendering
P3	GPU Compute	GPUs with tensor cores	Machine Learning
F1	Accelerated Computing	FPGA, custom hardware accelerations	Genomics
T2	Burstable	Shared CPUs, lowest cost	Web servers



Step 3 – Configure Instance Details

The screenshot shows the AWS Launch instance wizard Step 3: Configure Instance Details page. The URL is <https://console.aws.amazon.com/ec2/v2/home?region=us-east-1#LaunchInstanceWizard>. The page title is "Step 3: Configure Instance Details". The sub-navigation bar includes links for 1. Choose AMI, 2. Choose Instance Type, 3. Configure Instance (which is highlighted), 4. Add Storage, 5. Add Tags, 6. Configure Security Group, and 7. Review.

Number of instances: 1 [Launch into Auto Scaling Group](#)

Purchasing option: Request Spot instances

Network: vpc-e658e69c | Default (default) [Create new VPC](#)

Subnet: No preference (default subnet in any Availability Zone) [Create new subnet](#)

Auto-assign Public IP: Use subnet setting (Enable)

Placement group: Add instance to placement group

Capacity Reservation: Open [Create new Capacity Reservation](#)

IAM role: None [Create new IAM role](#)

Shutdown behavior: Stop

Enable termination protection: Protect against accidental termination

Monitoring: Enable CloudWatch detailed monitoring
Additional charges apply.

Tenancy: Shared - Run a shared hardware instance
Additional charges will apply for dedicated tenancy.

Elastic Inference: Add an Elastic Inference accelerator
Additional charges apply.

T2/T3 Unlimited: Enable
Additional charges may apply

[Advanced Details](#)

Buttons at the bottom: Cancel, Previous, **Review and Launch**, Next: Add Storage

Footer: Feedback, English (US), © 2008 - 2019, Amazon Internet Services Private Ltd. or its affiliates. All rights reserved. Privacy Policy Terms of Use



On Demand

- Low cost and flexibility with no upfront cost
- Pay for hours used with no commitment
- Good option for developers or testers
- Ideal for
 - auto scaling groups
 - Unpredictable workloads



Step 4 – Add Storage

The screenshot shows the AWS Launch Instance Wizard Step 4: Add Storage page. The URL is <https://console.aws.amazon.com/ec2/v2/home?region=us-east-1#LaunchInstanceWizard>. The page title is "Step 4: Add Storage". The navigation bar includes tabs: 1. Choose AMI, 2. Choose Instance Type, 3. Configure Instance, 4. Add Storage (which is active), 5. Add Tags, 6. Configure Security Group, and 7. Review.

Step 4: Add Storage

Your instance will be launched with the following storage device settings. You can attach additional EBS volumes and instance store volumes to your instance, or edit the settings of the root volume. You can also attach additional EBS volumes after launching an instance, but not instance store volumes. [Learn more](#) about storage options in Amazon EC2.

Volume Type	Device	Snapshot	Size (GiB)	Volume Type	IOPS	Throughput (MB/s)	Delete on Termination	Encrypted
Root	/dev/sda1	snap-0ac9e6b9d926e36c9	8	General Purpose SSD (gp2)	100 / 3000	N/A	<input checked="" type="checkbox"/>	Not Encrypted

[Add New Volume](#)

Free tier eligible customers can get up to 30 GB of EBS General Purpose (SSD) or Magnetic storage. [Learn more](#) about free usage tier eligibility and usage restrictions.

Buttons at the bottom: Cancel, Previous, **Review and Launch**, Next: Add Tags.

Footer links: Feedback, English (US), © 2008 - 2019, Amazon Internet Services Private Ltd. or its affiliates. All rights reserved., Privacy Policy, Terms of Use.



Storage options

- Block storage
 - Instance store
 - EBS volume
- Object storage
 - S3
- File sharing
 - EFS



EBS – Solid State Drives (SSD)

- General Purpose (gp2)
 - Used for dev/test environments
 - Baseline performance: 100 IOPS – 3000 IOPS
 - Bursts up to 32000 IOPS (credit based)
 - Volume size from 1GiB to 16 TiB
- Provisioned IOPS (io1)
 - Used for mission critical applications that require sustained IOPS performance
 - Large database workloads
 - Volume size: 4GiB to 16TiB
 - Performs at provisioned level and can provision up to 64K IOPS per volume
 - NOTE: EC2 instances have a maximum of 80K IOPS total



EBS – Hard Disk Drive (HDD)

- Can not be boot volume
- Size: 500GiB – 16TiB
- Types
 - Throughput Optimized (st1)
 - Low storage cost
 - Used for frequently accessed, throughout intensive workloads
 - E.g. Streaming, Big Data
 - Max throughput of 500 MiB/s
 - NOTE: EC2 instances have a maximum throughput of 1750MiB/s
 - Cold HDD (sc1)
 - Lowest cost
 - Infrequently accessed data
 - Max throughput of 250MiB/s



Step 5 – Add Tags

The screenshot shows the AWS Launch Instance Wizard Step 5: Add Tags page. The URL is <https://console.aws.amazon.com/ec2/v2/home?region=us-east-1#LaunchInstanceWizard>. The top navigation bar includes Services, Resource Groups, and a breadcrumb trail: 1. Choose AMI, 2. Choose Instance Type, 3. Configure Instance, 4. Add Storage, 5. Add Tags (highlighted in orange), 6. Configure Security Group, and 7. Review.

Step 5: Add Tags

A tag consists of a case-sensitive key-value pair. For example, you could define a tag with key = Name and value = Webserver. A copy of a tag can be applied to volumes, instances or both. Tags will be applied to all instances and volumes. [Learn more](#) about tagging your Amazon EC2 resources.

Key (127 characters maximum) | Value (255 characters maximum) | Instances (i) | Volumes (i)

This resource currently has no tags

Choose the Add tag button or [click to add a Name tag](#). Make sure your [IAM policy](#) includes permissions to create tags.

Add Tag (Up to 50 tags maximum)

Cancel Previous Review and Launch Next: Configure Security Group

Feedback English (US) © 2008 - 2019, Amazon Internet Services Private Ltd. or its affiliates. All rights reserved. Privacy Policy Terms of Use



Step 6 - Add Security Group

The screenshot shows the AWS Launch Instance Wizard at Step 6: Configure Security Group. The URL is <https://console.aws.amazon.com/ec2/v2/home?region=us-east-1#LaunchInstanceWizard>. The page title is "Step 6: Configure Security Group". The sub-navigation bar includes links for Choose AMI, Choose Instance Type, Configure Instance, Add Storage, Add Tags, Configure Security Group (which is highlighted in orange), and Review.

Assign a security group: Create a new security group Select an existing security group

Security group name: launch-wizard-6

Description: launch-wizard-6 created 2019-04-01T18:49:38.542+05:30

Type	Protocol	Port Range	Source	Description
SSH	TCP	22	Custom 0.0.0.0/0	e.g. SSH for Admin Desktop

Add Rule

Warning
Rules with source of 0.0.0.0/0 allow all IP addresses to access your instance. We recommend setting security group rules to allow access from known IP addresses only.

At the bottom right are buttons for Cancel, Previous, and Review and Launch (highlighted in blue).

At the very bottom are links for Feedback, English (US), Copyright (2008-2019), Privacy Policy, and Terms of Use.



Security Group

- Acts as a virtual firewall for your instance to control inbound and outbound traffic
- Controls the ports and protocols that can reach the front-end listener
- Every EC2 instance must have at least one security group attached
- Up to 5 security groups can be attached to an EC2 instance
- Security groups act at the instance level, not the subnet level
- Security group contains rules
 - You can specify allow rules, but not deny rules
 - You can specify separate rules for inbound and outbound traffic
 - When you create a security group, it has no inbound rules
 - By default, a security group includes an outbound rule that allows all outbound traffic
 - Security groups are stateful
 - Instances associated with a security group can't talk to each other unless you add rules allowing it
 - Security groups are associated with network interfaces



Step 7 – Review and create PEM file

The screenshot shows the AWS Launch Instance Wizard at Step 7: Review Instance Launch. The main page displays instance details like AMI, Instance Type (t2.micro), and Security Groups. A prominent warning message about security groups is visible. A modal window titled "Select an existing key pair or create a new key pair" is open, providing instructions and a dropdown menu for selecting a key pair. At the bottom of the modal, there is an acknowledgment checkbox and two buttons: "Cancel" and "Launch Instances".

Step 7: Review Instance Launch

Please review your instance launch details. You can go back to edit changes for each section. Click **Launch** to assign a key pair to your instance and complete the launch process.

AMI Details

Ubuntu Server 16.04 LTS (HVM), SSD Volume Type -
Free tier eligible
Ubuntu Server 16.04 LTS (HVM), EBS General Purpose (SSD) Vo
Root Device Type: ebs Virtualization type: hvm

Instance Type

Instance Type	ECUs	vCPUs	Memory (GiB)
t2.micro	Variable	1	1

Security Groups

Security group name	Description
launch-wizard-6	launch-wizard-6 created 2019-04-01T

Type: SSH Protocol: TCP Port: 22 Subnet: 0.0.0.0/0

Select an existing key pair or create a new key pair

A key pair consists of a **public key** that AWS stores, and a **private key file** that you store. Together, they allow you to connect to your instance securely. For Windows AMIs, the private key file is required to obtain the password used to log into your instance. For Linux AMIs, the private key file allows you to securely SSH into your instance.

Note: The selected key pair will be added to the set of keys authorized for this instance. Learn more about [removing existing key pairs from a public AMI](#).

Choose an existing key pair
Select a key pair
cloud-workshop

I acknowledge that I have access to the selected private key file (cloud-workshop.pem), and that without this file, I won't be able to log into my instance.

Cancel Launch Instances



EC2 Key Pairs

- Uses PEM format (Privacy Enhanced Mail)
- Used to authenticate a client when logging into EC2 instance
- Each key pair consists of a public key and a private key
- AWS stores the public key on the instance and your are responsible for storing the private key
- To log into the instance you must create and authenticate with key pair
 - Linux instances have no password and you use a key pair to log in
 - With windows you use a key pair to obtain the administrator password and then log into the instance with RDP
- During the creation process of an EC2 instance you are required to either create a new key pair or use existing pair
- The private key is available for download and stored on your local drive
- NOTE: it will be available only once in the form of .pem file

