

CS61B Lecture #20: Trees

Last modified: Wed Oct 16 16:03:40 2019

CS61B: Lecture #20 1

A Recursive Structure

- Trees naturally represent recursively defined, hierarchical objects with more than one recursive subpart for each instance.
- Common examples: expressions, sentences.
 - Expressions have definitions such as "an expression consists of a literal or two expressions separated by an operator."
- Also describe structures in which we recursively divide a set into multiple subsets.

Last modified: Wed Oct 16 16:03:40 2019

CS61B: Lecture #20 2

Formal Definitions

- Trees come in a variety of flavors, all defined recursively:
 - **61A style:** A tree consists of a *label* value and zero or more *branches* (or *children*), each of them a tree.
 - **61A style, alternative definition:** A tree is a set of *nodes* (or *vertices*), each of which has a label value and one or more *child nodes*, such that no node descends (directly or indirectly) from itself. A node is the *parent* of its children.
 - **Positional trees:** A tree is either *empty* or consists of a node containing a label value and an indexed sequence of zero or more children, each a positional tree. If every node has two positions, we have a *binary tree* and the children are its *left and right subtrees*. Again, nodes are the parents of their non-empty children.
 - We'll see other varieties when considering graphs.

Last modified: Wed Oct 16 16:03:40 2019

CS61B: Lecture #20 3

Tree Characteristics (I)

- The *root* of a tree is a non-empty node with no parent in that tree (its parent might be in some larger tree that contains that tree as a subtree). Thus, every node is the root of a (sub)tree.
- The *order*, *arity*, or *degree* of a node (tree) is its number (maximum number) of children.
- The nodes of a *k-ary tree* each have at most *k* children.
- A *leaf* node has no children (no non-empty children in the case of positional trees).

Last modified: Wed Oct 16 16:03:40 2019

CS61B: Lecture #20 4

Tree Characteristics (II)

- The *height* of a node in a tree is the largest distance to a leaf. That is, a leaf has height 0 and a non-empty tree's height is one more than the maximum height of its children. The height of a tree is the height of its root.
- The *depth* of a node in a tree is the distance to the root of that tree. That is, in a tree whose root is *R*, *R* itself has depth 0 in *R*, and if node *S* \neq *R* is in the tree with root *R*, then its depth is one greater than its parent's.

Last modified: Wed Oct 16 16:03:40 2019

CS61B: Lecture #20 5

A Tree Type, 61A Style




```
public class Tree<Label> {  
  
    // This constructor is convenient, but unfortunately requires this  
    // SuppressWarnings annotation to prevent (harmless) warnings  
    // that we will explain later.  
    @SuppressWarnings("unchecked")  
    public Tree(Label label, Tree<Label>... children) {  
        _label = label;  
        _kids = new ArrayList<>(Arrays.asList(children));  
    }  
  
    public int arity() { return _kids.size(); }  
  
    public Label label() { return _label; }  
  
    public Tree<Label> child(int k) { return _kids.get(k); }  
  
    private Label _label;  
    private ArrayList<Tree<Label>> _kids;  
}
```

Last modified: Wed Oct 16 16:03:40 2019

CS61B: Lecture #20 6

Fundamental Operation: Traversal


- **Traversing a tree** means enumerating (some subset of) its nodes.
- Typically done recursively, because that is natural description.
- As nodes are enumerated, we say they are **visited**.
- Three basic orders for enumeration (+ variations):
 - **Preorder**: visit node, traverse its children.
 - **Postorder**: traverse children, visit node.
 - **Inorder**: traverse first child, visit node, traverse second child (binary trees only).



Last modified: Wed Oct 16 16:03:40 2019

CS61B: Lecture #20 7

Preorder Traversal and Prefix Expressions

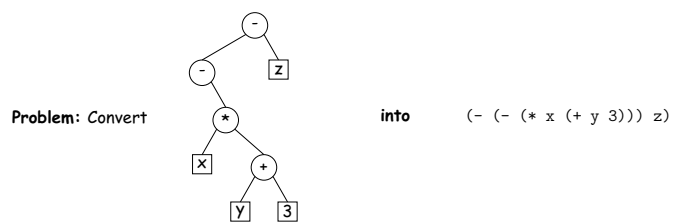

(Assume `Tree<Label>` is means "Tree whose labels have type `Label`.")


```
static String toLisp(Tree<String> T) {
    if (T.arity() == 0) return T.label();
    else {
        String R; R = "(" + T.label();
        for (int i = 0; i < T.arity(); i += 1)
            R += " " + toLisp(T.child(i));
        return R + ")";
    }
}
```

Last modified: Wed Oct 16 16:03:40 2019

CS61B: Lecture #20 8

Inorder Traversal and Infix Expressions

Problem: Convert



into $((-(x*(y+3)))-z)$

To think about: how to get rid of all those parentheses.


```
static String toInfix(Tree<String> T) {
    if (T.arity() == 0) {
        return T.label();
    } else if (T.arity() == 1) {
        return "(" + T.label() + toInfix(T.child(0)) + ")";
    } else {
        return "(" + toInfix(T.child(0)) + T.label() + toInfix(T.child(1)) + ")";
    }
}
```

Last modified: Wed Oct 16 16:03:40 2019

CS61B: Lecture #20 9

Postorder Traversal and Postfix Expressions

Problem: Convert



into $x y 3 + : 2 * : 2 - : 1 z - : 2$

```
static String toPolish(Tree<String> T) {
    String R; R = "";
    for (int i = 0; i < T.arity(); i += 1)
        R += toPolish(T.child(i)) + " ";
    return R + String.format("%s:%d", T.label(), T.arity());
}
```

Last modified: Wed Oct 16 16:03:40 2019

CS61B: Lecture #20 10

A General Traversal: The Visitor Pattern

```
void preorderTraverse(Tree<Label> T, Consumer<Tree<Label>> visit) {
    if (T != null) {
        visit.accept(T);
        for (int i = 0; i < T.arity(); i += 1)
            preorderTraverse(T.child(i), visit);
    }
}
```

- `java.util.function.Consumer<AType>` is a library interface that works as a function-like type with one void method, `accept`, which takes an argument of type `AType`.
- Now, using Java 8 lambda syntax, I can print all labels in the tree in preorder with:

```
preorderTraverse(myTree, T -> System.out.print(T.label() + " "));
```

Last modified: Wed Oct 16 16:03:40 2019

CS61B: Lecture #20 11

Iterative Depth-First Traversals

- Tree recursion conceals data: a **stack** of nodes (all the `T` arguments) and a little extra information. Can make the data explicit:

```
void preorderTraverse2(Tree<Label> T, Consumer<Tree<Label>> visit) {
    Stack<Tree<Label>> work = new Stack<>();
    work.push(T);
    while (!work.isEmpty()) {
        Tree<Label> node = work.pop();
        visit.accept(node);
        for (int i = node.arity()-1; i >= 0; i -= 1)
            work.push(node.child(i)); // Why backward?
    }
}
```


- This traversal takes the same $\Theta(\cdot)$ time as doing it recursively, and also the same $\Theta(\cdot)$ space.
- That is, we have substituted an explicit stack data structure (`work`) for Java's built-in execution stack (which handles function calls).

Last modified: Wed Oct 16 16:03:40 2019

CS61B: Lecture #20 12

Level-Order (Breadth-First) Traversal

Problem: Traverse all nodes at depth 0, then depth 1, etc:



Last modified: Wed Oct 16 16:03:40 2019

CS61B: Lecture #20 13

Breadth-First Traversal Implemented

A simple modification to iterative depth-first traversal gives breadth-first traversal. Just change the (LIFO) stack to a (FIFO) queue:

```
void breadthFirstTraverse(Tree<Label> T, Consumer<Tree<Label>> visit) {
    ArrayDeque<Tree<Label>> work = new ArrayDeque<>(); // (Changed)
    work.push(T);
    while (!work.isEmpty()) {
        Tree<Label> node = work.remove(); // (Changed)
        if (node != null) {
            visit.accept(node);
            for (int i = 0; i < node.arity(); i += 1) // (Changed)
                work.push(node.child(i));
        }
    }
}
```

Last modified: Wed Oct 16 16:03:40 2019

CS61B: Lecture #20 14

Times

- The traversal algorithms have roughly the form of the boom example in §1.3.3 of *Data Structures*—an exponential algorithm.
- However, the role of M in that algorithm is played by the *height* of the tree, not the number of nodes.
- In fact, easy to see that tree traversal is *linear*: $\Theta(N)$, where N is the # of nodes: Form of the algorithm implies that there is one visit at the root, and then one visit for every *edge* in the tree. Since every node but the root has exactly one parent, and the root has none, *must be $N - 1$ edges in any non-empty tree.*
- In positional tree, is also one recursive call for each empty tree, but # of empty trees can be no greater than kN , where k is arity.
- For k -ary tree (max # children is k), $h + 1 \leq N \leq \frac{k^{h+1}-1}{k-1}$, where h is height.
- So $h \in \Omega(\log_k N) = \Omega(\lg N)$ and $h \in O(N)$.
- Many tree algorithms look at one child only. For them, worst-case time is proportional to the *height* of the tree— $\Theta(\lg N)$ —assuming that tree is *bushy*—each level has about as many nodes as possible.

Last modified: Wed Oct 16 16:03:40 2019

CS61B: Lecture #20 15


Recursive Breadth-First Traversal: Iterative Deepening

- Previous breadth-first traversal used space proportional to the *width* of the tree, which is $\Theta(N)$ for bushy trees, whereas depth-first traversal takes $\lg N$ space on bushy trees.
 - Can we get breadth-first traversal in $\lg N$ space and $\Theta(N)$ time on bushy trees?
 - For each level, k , of the tree from 0 to *lev*, call `doLevel(T, k)`:
- ```
void doLevel(Tree T, int lev) {
 if (lev == 0)
 visit T
 else
 for each non-null child, C, of T {
 doLevel(C, lev-1);
 }
}
```
- So we do breadth-first traversal by repeated (truncated) depth-first traversals: *iterative deepening*.
  - In `doLevel(T, k)`, we skip (i.e., traverse but don't visit) the nodes before level  $k$ , and then visit at level  $k$ , but not their children.

Last modified: Wed Oct 16 16:03:40 2019

CS61B: Lecture #20 16

## Iterative Deepening Time?

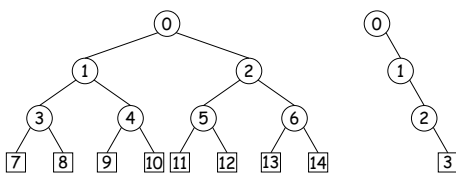

- Let  $h$  be height,  $N$  be # of nodes.
- Count # edges traversed (i.e., # of calls, not counting null nodes).
- First (full) tree: 1 for level 0, 3 for level 1, 7 for level 2, 15 for level 3.
- Or in general  $(2^1 - 1) + (2^2 - 1) + \dots + (2^{h+1} - 1) = 2^{h+2} - h \in \Theta(N)$ , since  $N = 2^{h+1} - 1$  for this tree.
- Second (right leaning) tree: 1 for level 0, 2 for level 1, 3 for level 2.
- Or in general  $(h + 1)(h + 2)/2 = N(N + 1)/2 \in \Theta(N^2)$ , since  $N = h + 1$  for this kind of tree.

Last modified: Wed Oct 16 16:03:40 2019

CS61B: Lecture #20 17

## Iterators for Trees

- Frankly, iterators are not terribly convenient on trees.
- But can use ideas from iterative methods.

```
class PreorderTreeIterator<Label> implements Iterator<Label> {
 private Stack<Tree<Label>> s = new Stack<Tree<Label>>();

 public PreorderTreeIterator(Tree<Label> T) { s.push(T); }

 public boolean hasNext() { return !s.isEmpty(); }
 public T next() {
 Tree<Label> result = s.pop();
 for (int i = result.arity()-1; i >= 0; i -= 1)
 s.push(result.child(i));
 return result.label();
 }
}
```



**Example:** (what do I have to add to class `Tree` first?)

```
for (String label : aTree) System.out.print(label + " ");
```


Last modified: Wed Oct 16 16:03:40 2019

CS61B: Lecture #20 18


## Tree Representation

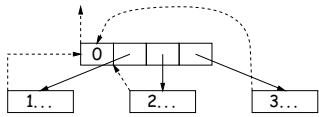


(a) Embedded child pointers  
(+ optional parent pointers)

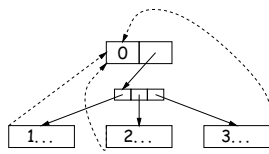

(b) Array of child pointers  
(+ optional parent pointers)



(c) child/sibling pointers



(d) breadth-first array  
(complete trees)