# 리액트 클론코딩1

작성자: 최수진

# 결과

Gournet au Catering





#### About Catering

Tradition since 1889

The Catering was founded in blabla by Mr Smith in lorem ipsum dolor sit amet, consecteur adipticing ellit, consecteur adipticing ellit, ased do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud execritation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute iruredolor in reprehenderit in voluptate veile use cillum dolore eu fugiat nulla paristru. We only use seasonal ingredient.

Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum consectetur adipiscing elit, sed do eiusmod temporincididunt ut labore et dolore magna aliqua. Ut enim ad minim venima, quis nostrud esercitation ullamco laboris nisi ut aliquip ex ea commodo consequat.

#### Our Menu

#### Bread Basket

Assortment of fresh baked fruit breads and muffins 5.50

Honey Almond Granola with Fruits

Belgian Waffle

Vanilla flavored batter with malted flour 7.5

Scrambled eggs

icrambled eggs, roasted red pepper and garlic, with green onions 7.50

Blueberry Pancakes

With syrup, butter and lots of berries 8.50




#### Contact

We offer full-service catering for any event, large or small. We understand your needs and we will cater the food to satisfy the biggerst criteria of them all, both look and taste.

Catering Service, 42nd Living St, 43043 New York, NY

fou can also contact us by phone 00553123-2323 or email catering@catering.com, or you can send us a message here:	
Name	
How many people	
2022-03-14 2. <b>2</b> (98:00	F
Message \ Special requirements	
SEND MESSAGE	
Powered by <u>wil cos</u>	

## DOM 구조

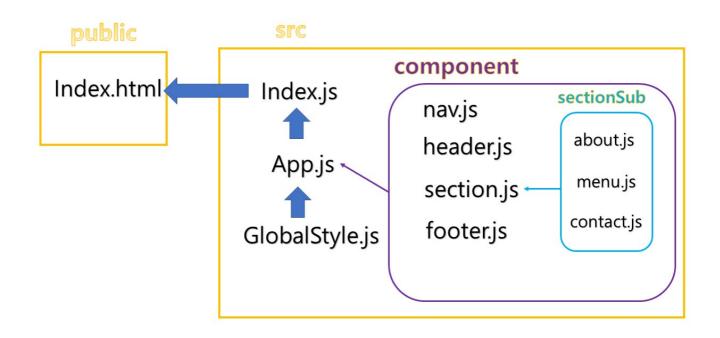

## Index.js

```
/**

* @filename: index.js

* @description: 프로그램 시작점.

* 라우팅 범위를 설정(BrowserRouter)하고 프로그램을 시작(App)한다.

* @author: sujin Choe(sujin971008@gamil.com)

*/

/** 패키지 참조 */
import React from 'react';
import ReactDOM from 'react-dom/client';
// 프로그램 시작
```

## App.js

```
/**
* @filename: App.js
* @description: 전역 스타일(GlobalStyles) 구성하고,
                각 component를 라우팅한다.
* @author: sujin Choe(sujin971008@gamil.com)
// 컴포넌트 import
import React from 'react';
import Nav from './property/nav';
import Header from './property/header';
import Section from './property/section';
import Footer from './property/footer';
// 전역 스타일 정의
import GlobalStyles from './GlobalStyle';
function App() {
 return (
  <div>
    <GlobalStyles/>
    <Nav/>
    <Header/>
    <Section/>
    <Footer/>
  </div>
  );
}
export default App;
```

## GlobalStyle.js

```
* @filename: GlobalStyles.js
 * @description: 전역으로 적용될 기본 스타일시트.
                이 파일에서 정의한 class는 ReactJSX에서 className속성으로 참조해야
한다.
* @author: sujin choe
*/
/** 패키지 참조 */
import { createGlobalStyle } from "styled-components";
* 전역 스타일 시트를 정의한 객체
* @type {GlobalStyleComponent<{}}, DefaultTheme>}
const GlobalStyle = createGlobalStyle`
*{
   font-family: "Times New Roman", Georgia, Serif;
   line-height: 1.5;
   font-size: 15px;
}
body{
   margin: 0;
   padding: 0;
h1,h2,h3,h4,h5,h6{
   font-family: "Playfair Display";
   letter-spacing: 5px;}
   h4{
   font-size: 20px;
   font-weight: 400;
   margin: 10px 0;
export default GlobalStyle;
```

## component/nav.js

```
/**
 * @filename: footer.js
 * @description: footer component
```

```
* @author: sujin Choe(sujin971008@gamil.com)
// 패키지 참조
import React from "react";
import styled from "styled-components";
import { NavLink } from "react-router-dom";
// styled_component
const Navbar = styled.nav`
 position: fixed;
 height: 40px;
 box-shadow: 2px 0 9px rgb(32, 31, 31);
  z-index: 1000;
 width: 100%;
 font-size: 15px;
 background-color: #eee;
  letter-spacing: 4px;
 padding: 8px 16px;
 a {
    color: black;
    text-decoration: none;
    padding: 10px 18px;
    font-weight: 100;
    &:hover {
      background-color: rgb(204, 193, 193);
    }
  }
  .bar {
    padding: 8px;
    float: left;
    letter-spacing: 4px;
  .amc {
    padding-right: 40px;
    .Contact {
     float: right;
    }
    .Menu {
     float: right;
    .about {
      float: right;
    }
const nav = () => {
 return(
  <Navbar>
    <div className="bar">
```

### component/header.js

```
/**
 * @filename: header.js
* @description: header component
* @author: sujin Choe(sujin971008@gamil.com)
*/
// 패키지 참조
import React from "react";
import styled from "styled-components";
// img 폴더에서 img 컴포넌트 import
import img from "./img/hamburger.jpg";
// styled component
const Burger = styled.header`
 width: 1600px;
 height: 800px;
 margin: auto;
 position: relative;
 .img {
   margin: auto;
   width: 100%;
 div > h1 {
   display: block;
   font-size: 38px;
    position: absolute;
    bottom: 1px;
   left: 25px;
    color: rgb(70, 70, 70);
   font-weight: 100;
   font-family: "Playfair Display";
   letter-spacing: 4px;
```

## component/section.js

```
/**
 * @filename: section.js
 * @description: section component
 * @author: sujin Choe(sujin971008@gamil.com)
import React from "react";
import styled from "styled-components";
import About from "./sectionsub/about";
import Menu from "./sectionsub/menu";
import Contact from '../property/sectionsub/contact';
const Section = styled.div`
 max-width: 1100px;
 height: 2450px;
 margin: auto;
const section = () => {
 return(
  <Section>
    <About />
    <Menu />
    <Contact />
  </Section>
 );
};
export default section;
```

## component/footer.js

```
/**
 * @filename: footer.js
 * @description: footer component
 * @author: sujin Choe(sujin971008@gamil.com)
import React from "react";
import styled from "styled-components";
import { NavLink } from "react-router-dom";
const Footer = styled.footer`
  padding: 32px 0;
  p {
   margin: 15px;
    text-align: center;
    font-size: 15px;
  }
const footer = () => {
  return(
  <Footer>
    >
      Powered by <NavLink to="/">w3.css</NavLink>
  </Footer>
  );
};
export default footer;
```

### component/sectionSub/about.js

```
import React from "react";
import styled from "styled-components";
import tableset2 from "../img/tablesetting2.jpg";

const Content = styled.div`
  padding: 64px 0;
  box-sizing: border-box;
  height: 780px;
  position: relative;

.about {
    padding: 12px 24px;
    top: 64px;
    position: absolute;
    left: 0;
```

```
width: 50%;
    box-sizing: border-box;
    img {
      width: 100%;
     height: 100%;
     opacity: 0.75;
    }
  }
  .txt {
    padding: 12px 24px;
    position: absolute;
    width: 50%;
    right: 0;
    box-sizing: border-box;
    h1 {
     font-size: 36px;
      font-weight: 500;
     text-align: center;
     text-align: center;
      margin: 10px 0;
    }
    h5 {
     font-size: 18px;
      font-weight: 500;
      position: relative;
      margin-top: 8px;
     text-align: center;
    }
    p {
     font-size: 18px;
    .p {
     color: #757575;
      position: relative;
      margin-top: -25px;
 }
const about = () => {
 return(
  <Content>
    <div className="about">
      <img src={tableset2} class="img2" alt="테이블세팅2" />
    </div>
    <div className="txt">
      <h1>About Catering</h1>
```

```
<h5>Tradition since 1889</h5>
       The Catering was founded in blabla by Mr. Smith in lorem ipsum dolor sit
       amet, consectetur adipiscing elit consectetur adipiscing elit, sed do
       eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad
       minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip
       ex ea commodo consequat. Duis aute iruredolor in reprehenderit in
       voluptate velit esse cillum dolore eu fugiat nulla pariatur. We only use
       seasonal ingredient.
     <br />
     Excepteur sint occaecat cupidatat non proident, sunt in culpa qui
       officia deserunt mollit anim id est laborum consectetur adipiscing elit,
       sed do eiusmod temporincididunt ut labore et dolore magna aliqua. Ut
       enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut
       aliquip ex ea commodo consequat.
   </div>
 </Content>
 );
};
export default about;
```

#### component/sectionSub/menu.js

```
import React from "react";
import styled from "styled-components";
import tableset from "../img/tablesetting.jpg";
const Content = styled.div`
 height: 500px;
 display: table;
 width: 100%;
  .menu {
    padding: 12px 24px;
    display: inline-block;
    box-sizing: border-box;
    width: 50%;
    height: 762.67px;
    vertical-align: middle;
   font-size: 36px;
    font-weight: 500;
    text-align: center;
    text-align: center;
    margin: 10px 0;
```

```
}
   p {
     font-size: 15px;
     color: #757575;
    margin: 15px 0;
   }
 }
 .menu_img {
   display: inline-block;
   padding: 12px 24px;
   opacity: 0.75;
   width: 50%;
   height: 90%;
   box-sizing: border-box;
   vertical-align: middle;
   .img1 {
     width: 100%;
     height: 100%;
     border-radius: 4px;
   }
` ;
const menu = () => {
 return(
 <Content>
   <div className="menu">
     <h1 className="h1">Our Menu</h1>
     <br />
     <h4>Bread Basket</h4>
     Assortment of fresh baked fruit breads and muffins 5.50
     <br />
     <h4>Honey Almond Granola with Fruits</h4>
     Natural cereal of honey toasted oats, raisins, almonds and dates 7.00
     <br />
     <h4>Belgian Waffle</h4>
     Vanilla flavored batter with malted flour 7.50
     <br />
     <h4>Scrambled eggs</h4>
     Scrambled eggs, roasted red pepper and garlic, with green onions 7.50
     <br />
     <h4>Blueberry Pancakes</h4>
     With syrup, butter and lots of berries 8.50
   </div>
   <div className="menu img">
```

### sectionSub/contact.js

```
import React from "react";
import styled from "styled-components";
const Contact = styled.div`
  padding: 64px 16px;
 height: 650px;
 h1 {
   font-size: 36px;
   font-weight: 500;
   margin: 10px 0;
  }
  .p1,
  .p3 {
   font-size: 15px;
   margin: 15px 0;
  .p2 {
   margin: 18px 0;
    color: #607d8b;
    font-weight: 800;
  }
  form {
    p > input {
      padding: 16px 8px;
      width: 100%;
      border: 0;
      border-bottom: 1px solid #ccc;
    .button {
      margin: 15px 0;
      button {
        border: 0;
        display: inline-block;
        cursor: pointer;
        padding: 10px;
        height: 40px;
```

```
margin: 16px;
       &:hover {
         background-color: #ccc;
     }
   }
const contact = () => {
 return(
 <Contact>
   <div className="contact_section">
     <h1>Contact</h1>
     <br />
   </div>
   We offer full-service catering for any event, large or small. We
     understand your needs and we will cater the food to satisfy the biggerst
     criteria of them all, both look and taste. Do not hesitate to contact us.
   Catering Service, 42nd Living St, 43043 New York, NY
   You can also contact us by phone 00553123-2323 or email
     catering@catering.com, or you can send us a message here:
   <form>
       <input type="text" name="Name" placeholder="Name" />
     <input type="numer" name="people" placeholder="How many people" />
     >
       <input type="datetime-local" name="time" value="2022-03-14T20:00" />
     >
       <input</pre>
        type="text"
        name="message"
         placeholder="Message \ Special requirements"
       />
     <button type="submit" name="send_message">
       SEND MESSAGE
       </button>
     </form>
 </Contact>
 );
};
```

export default contact;

## 후기

- 주석을 자세히 달고 싶었는데 막상 설명을 쓰려니 쉽지 않았다 아마 단어선택에 어려움이 있는 거 같다. 이번에 구매하게 된 책을 정독해야 겠다는 생각이 들었다.
- GlobalStyles을 가두는 식으로 ... 작성하고 싶었는데 오류가 났다 아마 가두는 식으로는 구현이 불가능한 것 같다.
- 코딩을 완료했는데 화면이 뜨지 않아서 당황했다. 알고보니 return을 하지 않고 그냥 jsx문법을 쓰고 있었다..주의해야겠다.