

# **Perform logical data extraction from an Android device using ADB and AFLogical OSE**

**EXPERIMENT NO:** 07

**DATE:**

## **1. AIM**

To configure an Android mobile forensics environment, establish a secure ADB bridge connection, utilize the AFLogical OSE application to perform a logical data extraction, and transfer, verify, and analyze the resulting CSV artifacts.

## **2. SOFTWARE/TOOLS REQUIRED**

- **Operating System:** Windows/Linux/macOS host machine
- **Forensics Tool:** AFLogical OSE (Open Source Edition) APK, Android Debug Bridge (ADB) CLI utility
- **Runtime Environment:** Java Development Kit (JDK)
- **Hardware:** Target Android Mobile Device, USB Data Cable

## **3. DESCRIPTION**

AFLogical OSE (Open Source Edition, developed by viaForensics) is an application-based tool installed via the Android Debug Bridge (ADB). It queries the device's internal databases to extract critical user artifacts—including contacts, SMS messages, MMS messages, and call logs. The extracted records are compiled and stored locally in standardized CSV (Comma-Separated Values) format, allowing investigators to easily pull, review, and document evidentiary records for investigative reporting.

Logical data extraction is a non-invasive mobile forensics technique used to gather structured data directly from an operating device's active databases and content providers without requiring root access. While physical extraction captures a bit-by-bit clone of the flash memory (enabling the recovery of deleted files), logical extraction interacts exclusively with the operating system's APIs to pull active, allocated data.

## 4. PROCEDURE

### Step1:EnvironmentSetup&DevicePreparation

1. InstallJavaandthe AndroidSDKPlatform-Tools(ADB)onthehostworkstation, addingADB to the system PATH environment variable.
2. Enable**DeveloperOptions**onthetargetAndroiddevicebynavigatingto*Settings> About Phone* and tapping *Build Number* seven times.
3. Enable**USBDebugging**under*Settings>DeveloperOptions*.

### Step2:ConnectingandVerifyingtheDevice

1. ConnecttheAndroiddevicetothecomputerviaasecureUSBcable.
2. OpentheCommandPromptasanAdministratorandverifycommunicationusingthe ADB devices command:

DOS

adbdevices

A terminal window with a dark background. The prompt is (sujitha@kali)-[~/Downloads]. The command \$ adb devices is entered. The output is: List of devices attached, 2b3e6977 device.

```
(sujitha@kali)-[~/Downloads]  
$ adb devices  
List of devices attached  
2b3e6977 device
```

*Figure1:TerminaloutputdisplayingthesuccessfullyconnectedAndroiddeviceviaADB*

### Step3:DeployingandExecutingAFLogicalOSE

1. Navigate to the directory containing the aflogical.apk file and push/install the application onto the target device:

DOS


```
adbinstall aflogical.apk
```



```
-(sujitha@kali)-[~/Downloads]
-$ adb install com.viaforensics.andr
arming Streamed Install
```

*Figure2:Successfulinstallationof apk*

2. Launchthe**AFLogical**applicationmanuallyontheAndroiddeviceinterface.
3. Select the desired forensic data artifacts to extract (e.g., Contacts, SMS, Call Logs) and initiate the extraction process. The utility automatically writes the compiled records into .csv files within the device's local storage directory (/sdcard/aflogical).

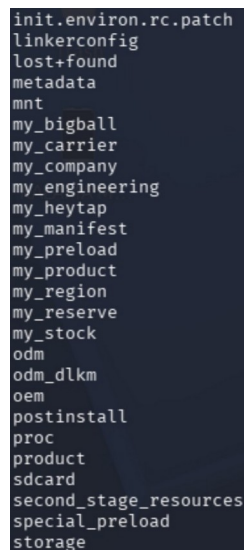


```
init.environ.rc.patch
linkerconfig
lost+found
metadata
mnt
my_bigball
my_carrier
my_company
my_engineering
my_heyta
my_manifest
my_preload
my_product
my_region
my_reserve
my_stock
odm
odm_dk
oem
postinstall
proc
product
sdcard
second_stage_resources
special_preload
storage
```

*Figure3:AFLogicalOSEinterfaceshowingdatacategoryselectionandextraction initiation*

#### Step4: DataVerification andAnalysis

1. Navigate to the local destination directory (C:\DF\AFLogical\_Evidence\) and inspect the generated CSV files using spreadsheet software or text editors to verify record integrity.

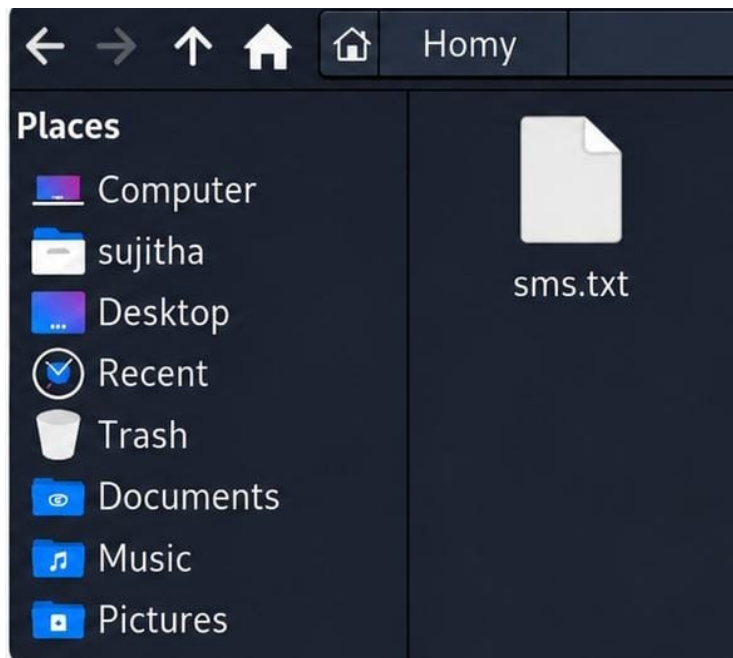

*Figure4: Examining extracted contact, SMS, and call log artifacts in spreadsheet format*

#### Step5: Remediation and Cleanup

1. Uninstall the forensic collection application from the target device to maintain forensic hygiene and restore the system state:

DOS

`adbuninstallcom.viaforensics.android.aflogical`

2. Safely disconnect the device from the workstation.

#### 5. OBSERVATIONS/FORENSIC FINDINGS

- **Bridge Communication:** The ADB daemon successfully initialized communication with the target device, confirming authorization and proper driver configuration.

- **Application Deployment:** The aflogical.apk package was successfully pushed and executed without triggering system integrity faults.
- **Artifact Extraction:** The logical acquisition routine successfully parsed the device's internal content providers, generating structured CSV files for communication and contact directories.
- **Data Integrity:** The pulled data files (contacts.csv, sms.csv, calls.csv) retained exact field parameters, timestamps, and metadata attributes necessary for evidentiary documentation.
- **Timestamp Formats:** Observe how the timestamps were recorded. Mobile devices often store time in **Unix Epoch time** (milliseconds since Jan 1, 1970) or UTC. Mentioning this shows a deep understanding of forensic data parsing.

## RUBRICS

| Criteria&MarksAssigned                           | MarkAllotted | MarkAwarded |
|--------------------------------------------------|--------------|-------------|
| 1.GitHubActivity& SubmissionRegularity           | 3            |             |
| 2.ApplicationofForensicTools&Practical Execution | 3            |             |
| 3.Documentation& Reporting                       | 2            |             |
| 4.Engagement,Problem-Solving&Team Collaboration  | 2            |             |
| Total                                            | 10           |             |

## **6. RESULT**

Logical data extraction from the Android device was successfully executed using AF Logical OSE and ADB commands. Key user artifacts including contacts, call logs, and messaging records were extracted, securely transferred to the host workstation, and verified for forensic analysis.