
Calma, Paul Richard G. **BSIT4A** **PDC50**

ASC_React Fundamentals Activity 2


Screenshots:

Concept 1 Components and JSX


01A: Welcome message

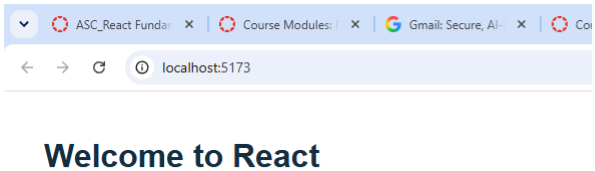

01B: Two student cards

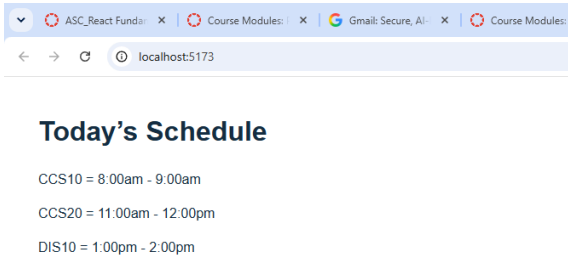

01C: Simple profile

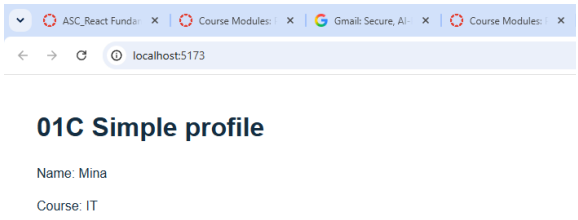


Concept 1 Explanation:


- React components are JavaScript functions that return JSX to define the user interface. JSX supports text, variables, and HTML-like elements.

Concept 2 Props


02A: Greeting by name

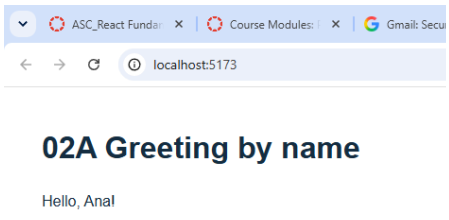

02B: Two student cards

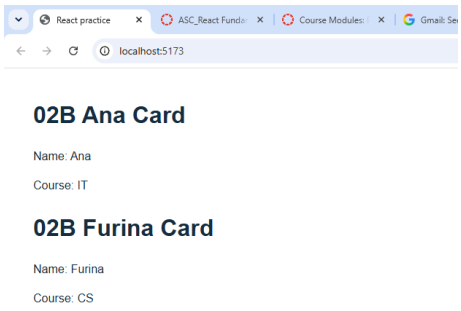

02C: Score badge

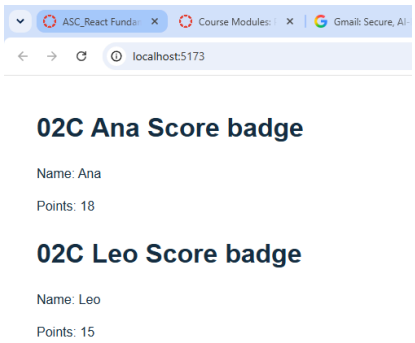


Concept 2 Explanation:


- Props let you pass data into a reusable component. This means the same component can show different information based on the props it gets.

Concept 3 State


03A: Attendance counter

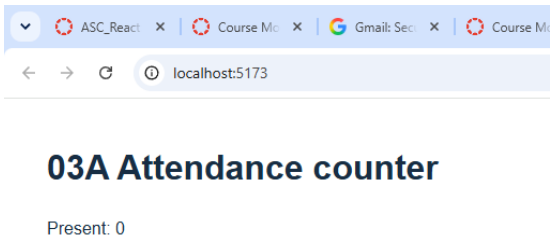

03B: Counter and reset

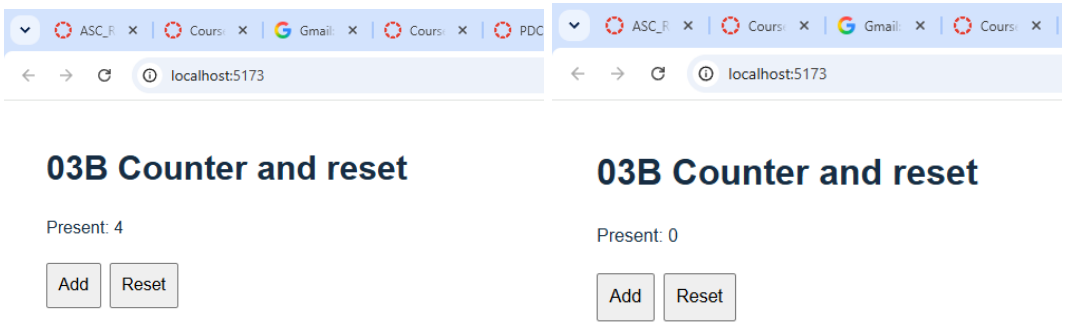

03C: Score with a limit

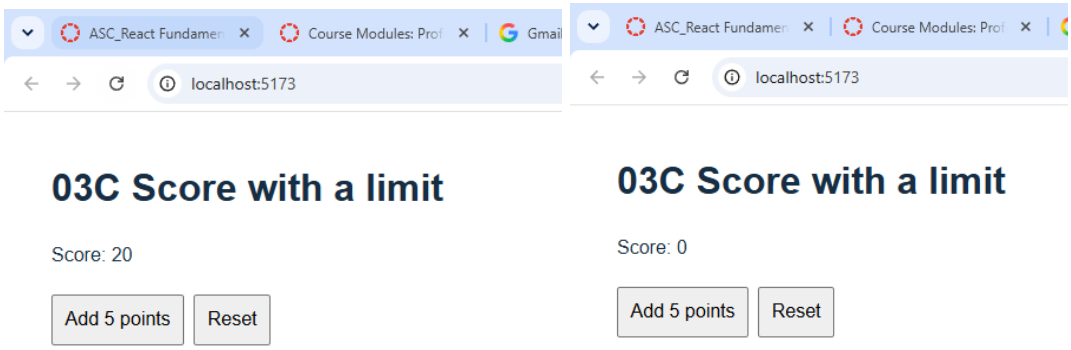


Concept 3 Explanation:


- State holds data that may change while the application is running. When state updates, React re-renders the component to reflect the new value without reloading.

Concept 4 Events


04A: Thank you button

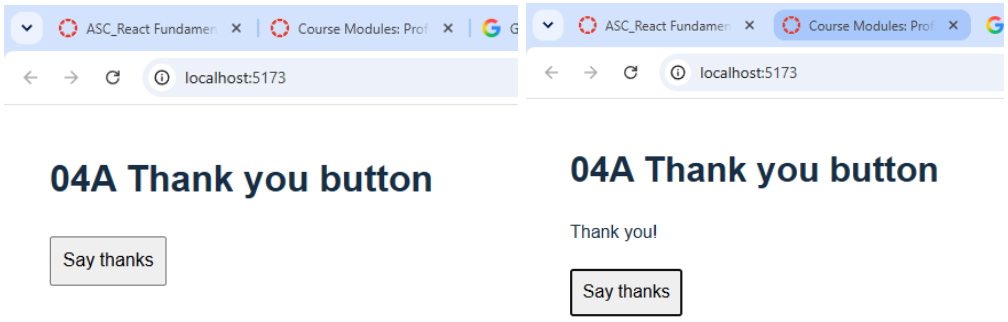

04B: Choose a greeting

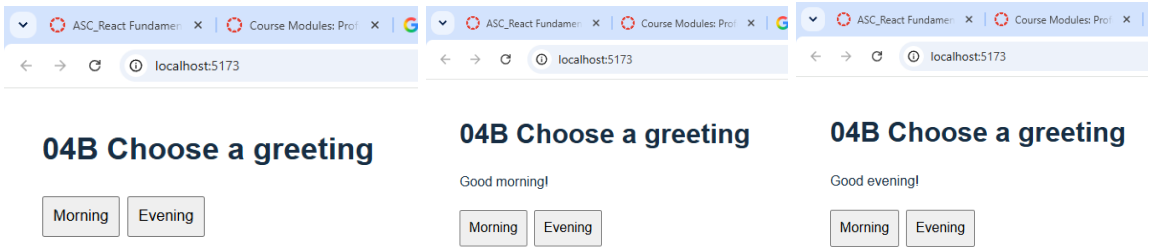

04C: Cheer counter

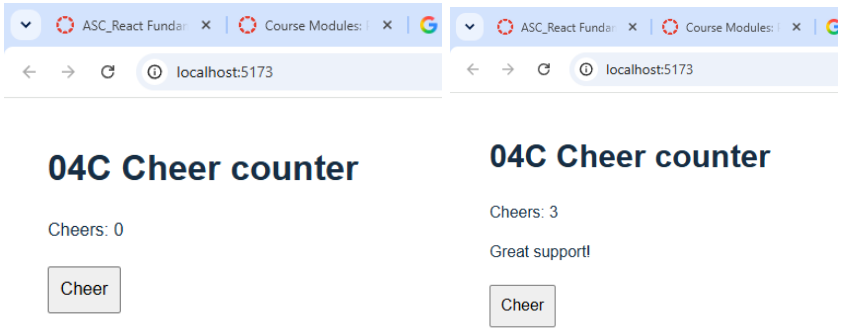


Concept 4 Explanation:


- Event handlers react to things users do, like clicking a button. When you update the state inside these handlers, the interface changes in response to what the user does.

Concept 5 Conditional rendering


05A: Room status

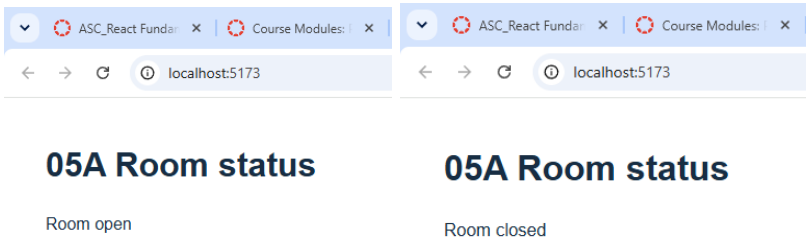

05B: Pass or retry

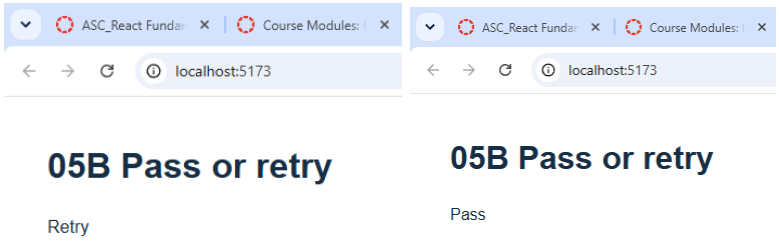

05C: Weather message

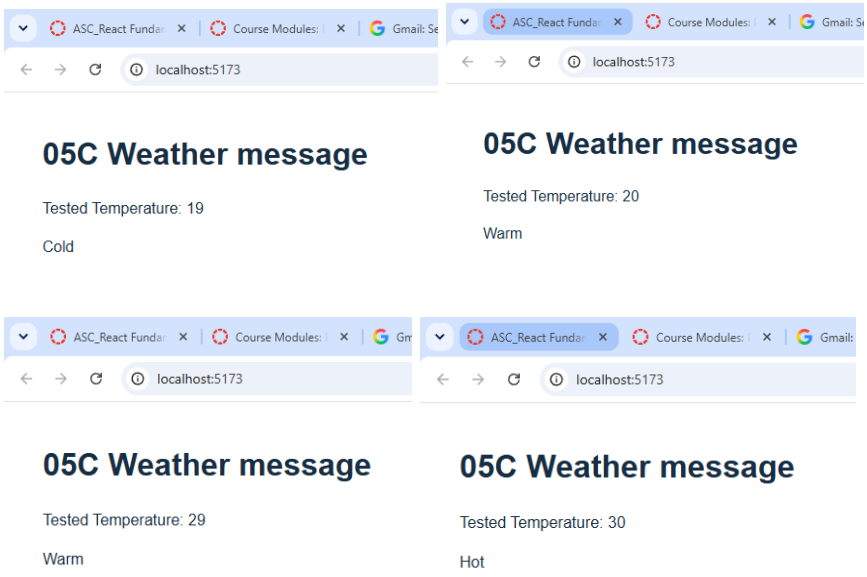


Concept 5 Explanation:


- Conditional rendering lets you show different content depending on a condition. You can use JavaScript conditions or ternary expressions in JSX to decide which message or element to display.

Concept 6 Lists from arrays


06A: Names on the board

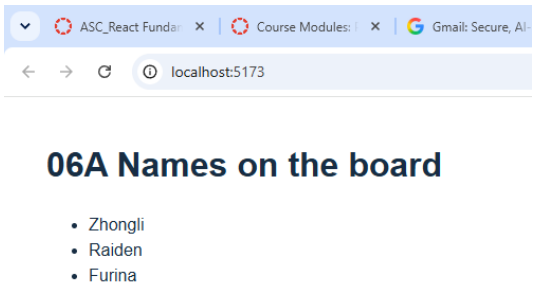

06B: Book titles

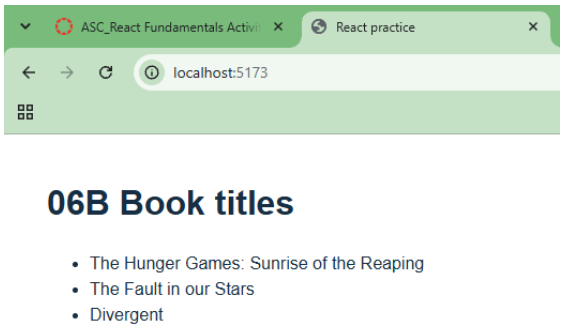

06C: Completed tasks

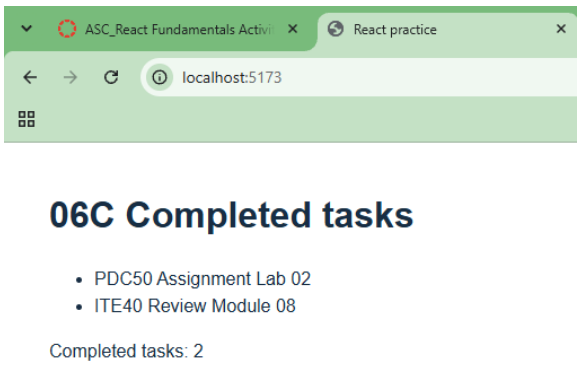



Concept 6 Explanation:

- You can use the map() method to turn arrays into lists of JSX elements. If you want to show only certain items, use methods like filter() before displaying them.


Concept 7 Inputs and forms

07A: Live name greeting

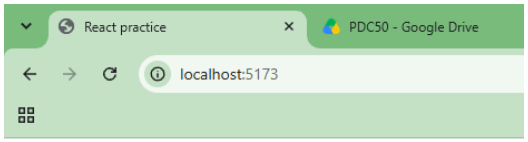


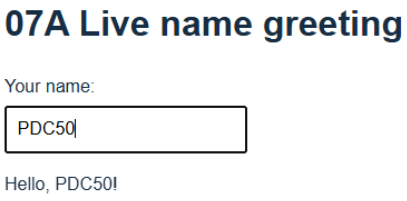


07B: Name form













07C: Event sign up








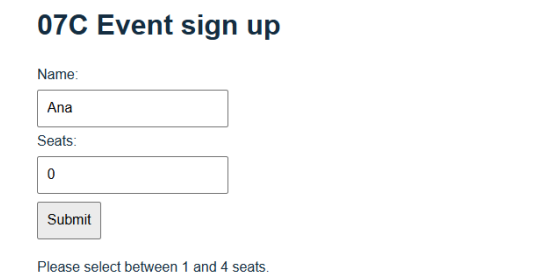

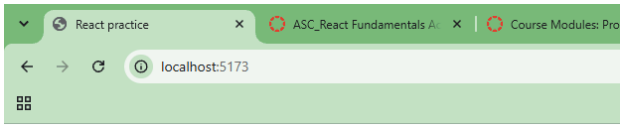

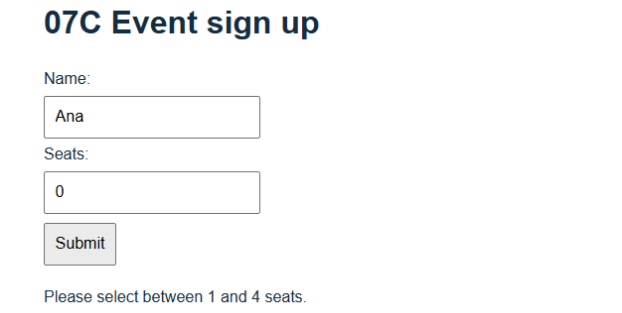

Concept 7 Explanation:

- Forms use state to track input values as the user types. Form submission can validate those values and display either an error message or a successful result.