

Step how to fix pipeline in case something is failed

1. If Postgres ฟ้า

restart postgres's pod and then click connection and copy the node port

Change the endpoint for each services(Postgresexporter + Prometheus,Grafana, airflow connection)

Workload ↑	Type	Status	Project	Department	Running / requested pods	Connection(s)	Data source(s)	GPU compute request	GPU compute allocation	GPU memory request
☐ pgadminv4	Inference	Running (35d-22h-51m)	datasci-intern-2	siamai-datasci	1/1-1	2	-	-	-	0 Bytes
☐ postgresexporterv8	Workspace	Running (8d-4h-14m)	datasci-intern-2	siamai-datasci	1/1	2	-	-	-	0 Bytes
☒ postgresrunaiv17	Workspace	Running (8d-4h-15m)	datasci-intern-2	siamai-datasci	1/1	1	-	-	-	0 Bytes
☐ prometheus5	Workspace	Running (8d-3h-52m)	datasci-intern-2	siamai-datasci	1/1	2	-	-	-	0 Bytes
☐ sentiment2	Inference	Running (35d-22h-51m)	datasci-intern-2	siamai-datasci	1/1-1	1	-	1	1	0 Bytes
☐ spare	Workspace	Stopped (43d-2h-18m)	datasci-intern-2	siamai-datasci	0/1	1	-	-	-	0 Bytes
☐ vscodeforgrafana	Workspace	Running (20d-23h-8m)	datasci-intern-2	siamai-datasci	1/1	1	-	-	-	0 Bytes

Connections Associated with Workload postgresrunaiv17

Search connections

Name ↑	Connection type	Access	Address
Custom	Node port	-	172.16.29.173:30138

Rows per page 20 1-1 of 1

CLOSE

1.1 For postgres exporter +promethesus

Create a new postgres exporter service by click make copy

Runai Workloads

1 selected

[RUN](#)
[STOP](#)
[CONNECT](#)
[MAKE A COPY](#)
[UPDATE](#)
[DELETE](#)

Workload	Type	Status	Project	Department	Running / requested pods	Connection(s)	Data source(s)	GPU compute request	GPU compute allocation	GPU
☐ pgadminv4	Inference	Running (35d-23h-6m)	datasci-intern-2	siamai-datasci	1/1-1	2	-	-	-	0 Byt
☒ postgresexporterv8	Workspace	Running (8d-4h-29m)	datasci-intern-2	siamai-datasci	1/1	2	-	-	-	0 Byt
☐ postgresrunalv17	Workspace	Running (8d-4h-30m)	datasci-intern-2	siamai-datasci	1/1	1	-	-	-	0 Byt
☐ prometheus5	Workspace	Running (8d-4h-7m)	datasci-intern-2	siamai-datasci	1/1	2	-	-	-	0 Byt
☐ sentiment2	Inference	Running (35d-23h-6m)	datasci-intern-2	siamai-datasci	1/1-1	1	-	1	1	0 Byt
☐ spare	Workspace	Stopped (43d-22h-33m)	datasci-intern-2	siamai-datasci	0/1	1	-	-	-	0 Byt
☐ vscodeforgrafana	Workspace	Running (20d-23h-23m)	datasci-intern-2	siamai-datasci	1/1	1	-	-	-	0 Byt
☐ vscodeforprom	Workspace	Running (18d-3h-14m)	datasci-intern-2	siamai-datasci	1/1	1	-	-	-	0 Byt
☐ vscodeforrealordata	Workspace	Running (10d-3h-1m)	datasci-intern-2	siamai-datasci	1/1	1	-	-	-	0 Byt
☐ vscodev11forgit	Workspace	Running (10d-23h-6m)	datasci-intern-2	siamai-datasci	1/1	1	-	-	-	0 Byt

Image URL
prometheuscommunity/postgres-exporter:latest

Image pull ☒

Tools ☒

Runtime settings ☒

Set a command and arguments for the container running in the pod

Command
e.g. start-notebook.sh

Arguments
--collector.stat_statements --collector.stat_statements.include_query --collector.stat_statements.query_len
Add multiple arguments separated by spaces

Set the environment variable(s)

Name	Source	Value
DATA_SOURCE_NAME	Custom	postgresql://postgres:postgres@172.16.29.174:30138/eiei?sslmode=disable
PG_EXPORTER_EXTEND_QUERY	Custom	/data/monitoring/exporter/qi

Go to Runtime settings and change the value of DATA_SOURCE_NAME

From example

Old Node port 172.16.29.174:30138

postgresql://postgres:postgres@172.16.29.174:30138/eiei?sslmode=disable

New Node port 172.16.60.172:30014

postgresql://postgres:postgres@172.16.60.172:30014/eiei?sslmode=disable

then click connection of your postgres exporter and copy the node port

Workloads

+ NEW WORKLOAD Cluster: runai-cluster Project: contains 2 Add Filter

SEARCH COLUMNS MORE REFRESH SHOW DETAILS

Workload ↑	Type	Status	Project	Department	Running / requested pods	Connection(s)	Data source(s)	GPU compute request	GPU compute allocation	GPU memory request
☐ airflow133	Workspace	Stopped (4d-20h-52m)	datasci-intern-2	siamai-datasci	0/1	2	-	-	-	0 Bytes
☐ airflow134	Workspace	Running (13m)	datasci-intern-2	siamai-datasci	1/1	2	-	-	-	0 Bytes
☐ attu	Workspace	Running (4d)	datasci-intern-2	siamai-datasci	1/1	1	-	-	-	0 Bytes
☐ grafana5	Workspace	Running (20d-23h-25m)	datasci-intern-2	siamai-datasci	1/1	1	-	-	-	0 Bytes
☐ milvus	Inference	Running (4d-3h-7m)	datasci-intern-2	siamai-datasci	1/1-1	1	-	-	-	0 Bytes
☐ miniovd2	Inference	Running (35d-23h-29m)	datasci-intern-2	siamai-datasci	1/1-1	2	-	-	-	0 Bytes
☐ miniovd4	Workspace	Running (25d-3h-23m)	datasci-intern-2	siamai-datasci	1/1	2	-	-	-	0 Bytes
☐ pgadmin4	Inference	Running (35d-23h-12m)	datasci-intern-2	siamai-datasci	1/1-1	2	-	-	-	0 Bytes
☐ postgresexporterv8	Workspace	Running (8d-4h-35m)	datasci-intern-2	siamai-datasci	1/1	2	-	-	-	0 Bytes
☐ postgresrunai17	Workspace	Running (8d-4h-37m)	datasci-intern-2	siamai-datasci	1/1	1	-	-	-	0 Bytes

Connections Associated with Workload postgresexporterv8


Search connections

Name ↑	Connection type	Access	Address
☐ Custom	External URL	All authenticated users	https://datasci-intern-2-postgresexporterv8.phuket.siam.ai
☐ Custom	Node port	-	172.16.29.173:30274


Rows per page 20 1-2 of 2

CLOSE

Then connect to vscofeforprom service Go to Folder /Data then go to file Prometheus.yaml then edit the endpoint in **Number(2)** replace with new nodeport of postgres exporter

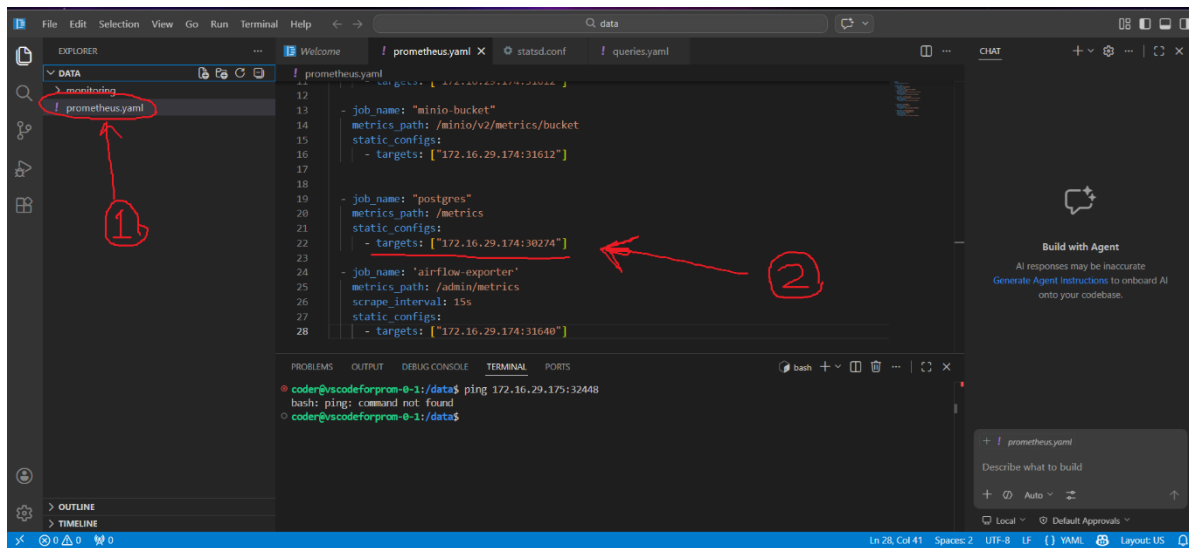

Then restart the prometheus pod then check the status > Target Health

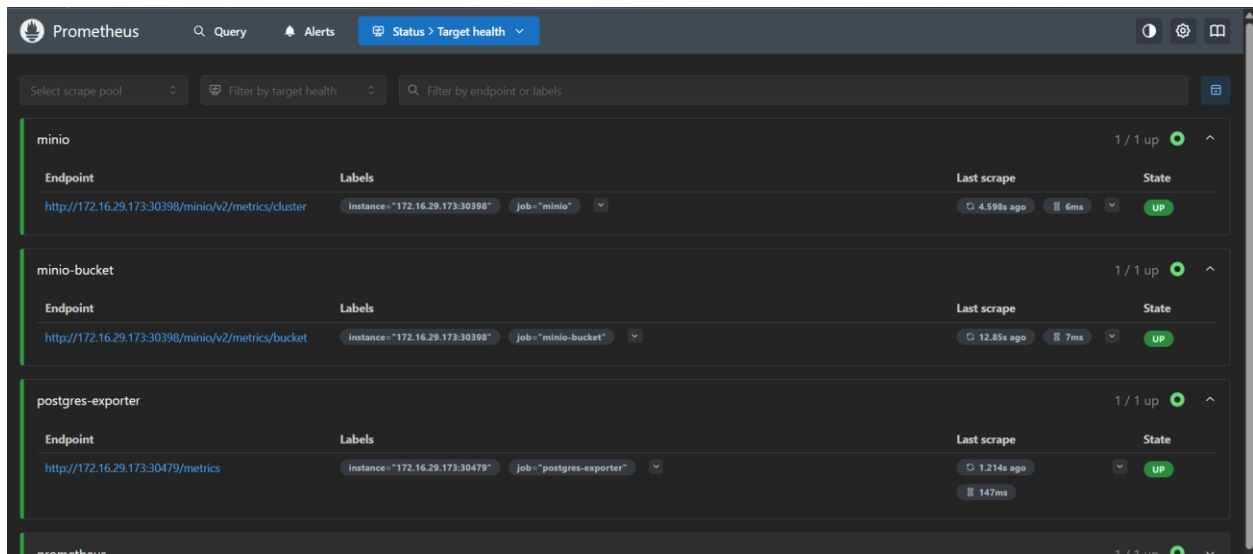

1.2 Connect to Grafana service

The screenshot displays the Runai Workloads management interface. On the left, a sidebar contains navigation links for Workloads, Templates, Assets, Models, Environments, Compute resources, Data & storage, Data sources, Data volumes, and Credentials. The 'Data & storage' section is expanded, and a red arrow labeled '1' points to the 'Data sources' link. The main panel shows a table of workloads. A red circle highlights the 'CONNECT' button in the top toolbar, with a red arrow labeled '2' pointing to it. Another red circle highlights the 'grafana5' workload in the table, which is marked with a green checkmark in the selection column.




Workload	Type	Status	Project	Department	Running / requested pods	Connection(s)	Data source(s)	GPU compute request	GPU compute allocation	GPU memory request
airflow133	Workspace	Stopped (4d-21h-2m)	datasci-intern-2	siamai-datasci	0/1	2	-	-	-	0 Bytes
airflow134	Workspace	Running (24h)	datasci-intern-2	siamai-datasci	1/1	2	-	-	-	0 Bytes
attu	Workspace	Running (4d-0h-11m)	datasci-intern-2	siamai-datasci	1/1	1	-	-	-	0 Bytes
grafana5	Workspace	Running (20d-23h-36m)	datasci-intern-2	siamai-datasci	1/1	1	-	-	-	0 Bytes
milvus	Inference	Running (4d-3h-18m)	datasci-intern-2	siamai-datasci	1/1-1	1	-	-	-	0 Bytes
minio-data2	Inference	Running (35d-22h-40m)	datasci-intern-2	siamai-datasci	1/1-1	2	-	-	-	0 Bytes
minio-workspace4	Workspace	Running (25d-3h-34m)	datasci-intern-2	siamai-datasci	1/1	2	-	-	-	0 Bytes
pgadminv4	Inference	Running (35d-23h-23m)	datasci-intern-2	siamai-datasci	1/1-1	2	-	-	-	0 Bytes
postgres-exporterv8	Workspace	Running (8d-4h-46m)	datasci-intern-2	siamai-datasci	1/1	2	-	-	-	0 Bytes
postgres-runai-v17	Workspace	Running (8d-4h-48m)	datasci-intern-2	siamai-datasci	1/1	1	-	-	-	0 Bytes

Rows per page: 20 | 1-17 of 17

Last login: 04/03/2026, 13:44
Version: 2.22.4b

Go to Dashboard -> Data source -> select postgres -> change the host URL then save&test

then after restart the prometheus pod go to datasouce -> prometheus then change to the new endpoint -> save&test

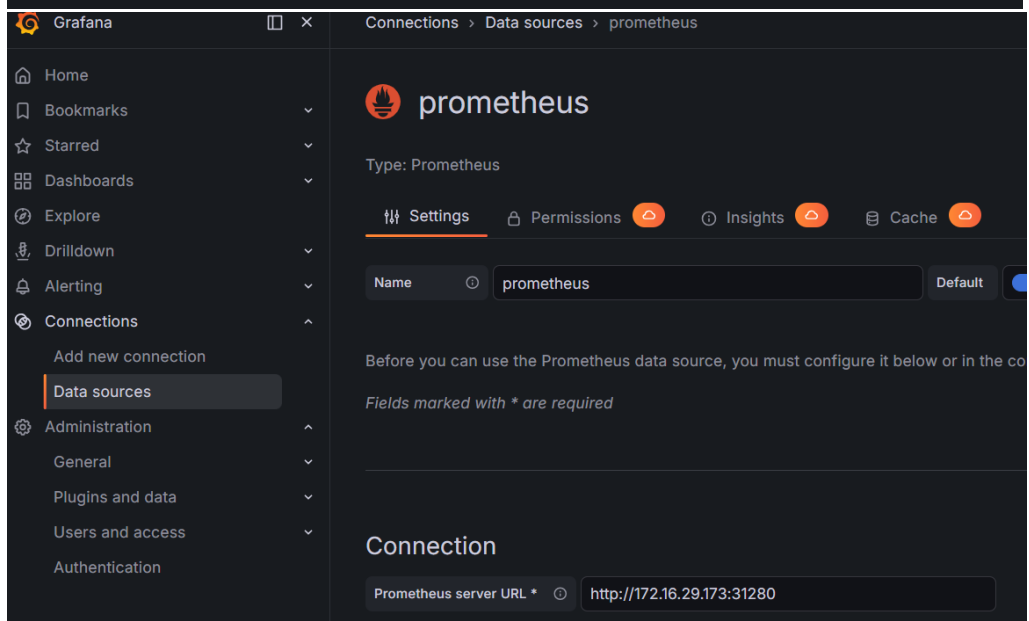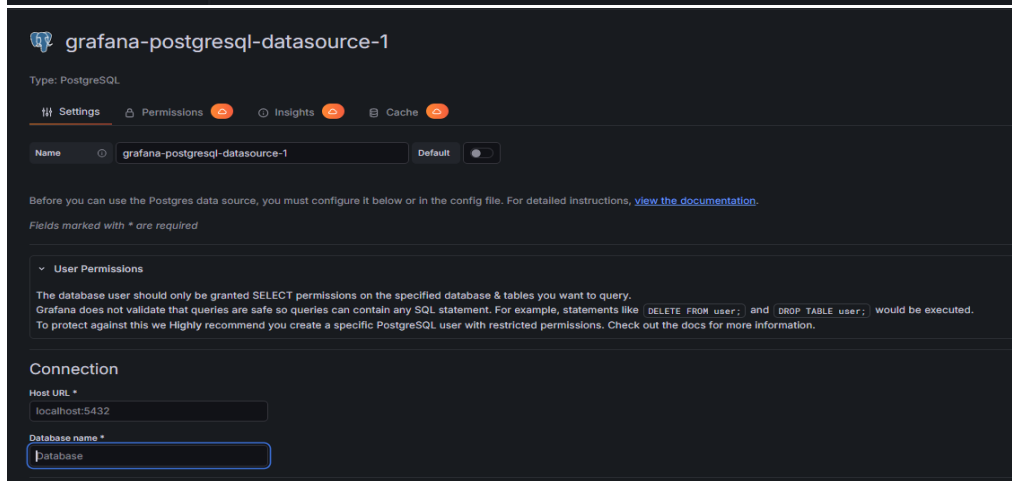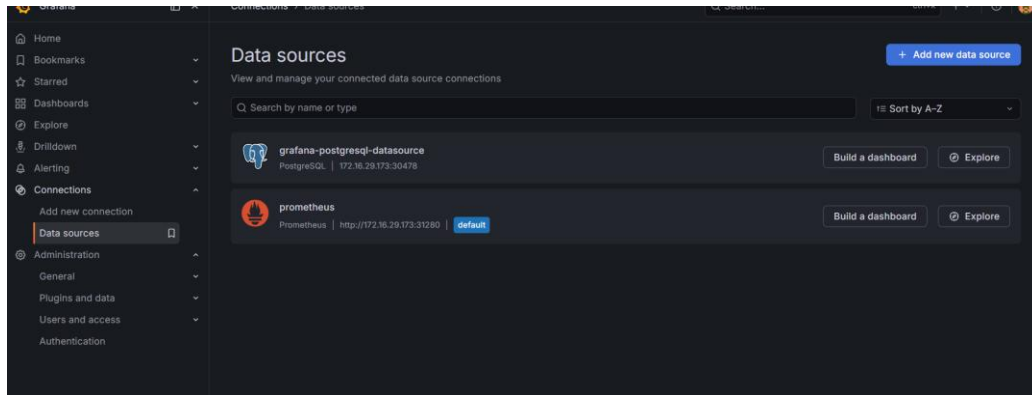


For Pgadmin got to pgadmin pod login

username: admin@local.com

Password: admin



After that click the register the new server For general set the name *can be anything next is the connection up the home address and port for the new postgres and set both user name and password as “postgres” then click save password then save

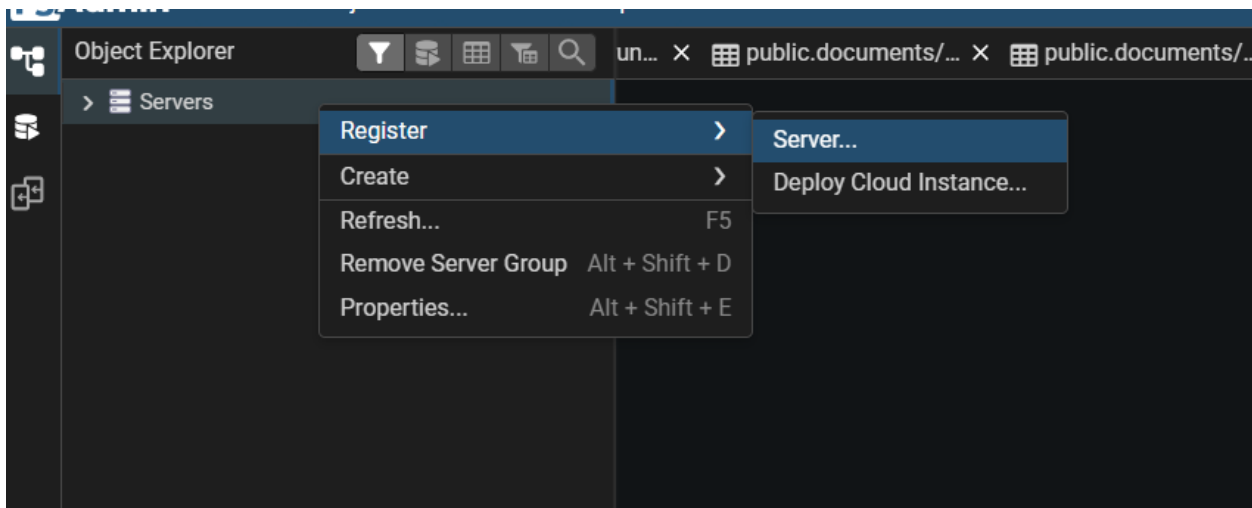

Register - Server

General

Connection

Parameters

SSH Tunnel

Advanced

Post Connection SQL

Tags

Name

ⓘ

Server group

Servers

Background

×

Foreground

×

Connect now?

Shared?

Shared Username

Comments

ⓘ

?

×

Close

↺

Reset


💾

Save

ⓘ

'Name' cannot be empty.


×

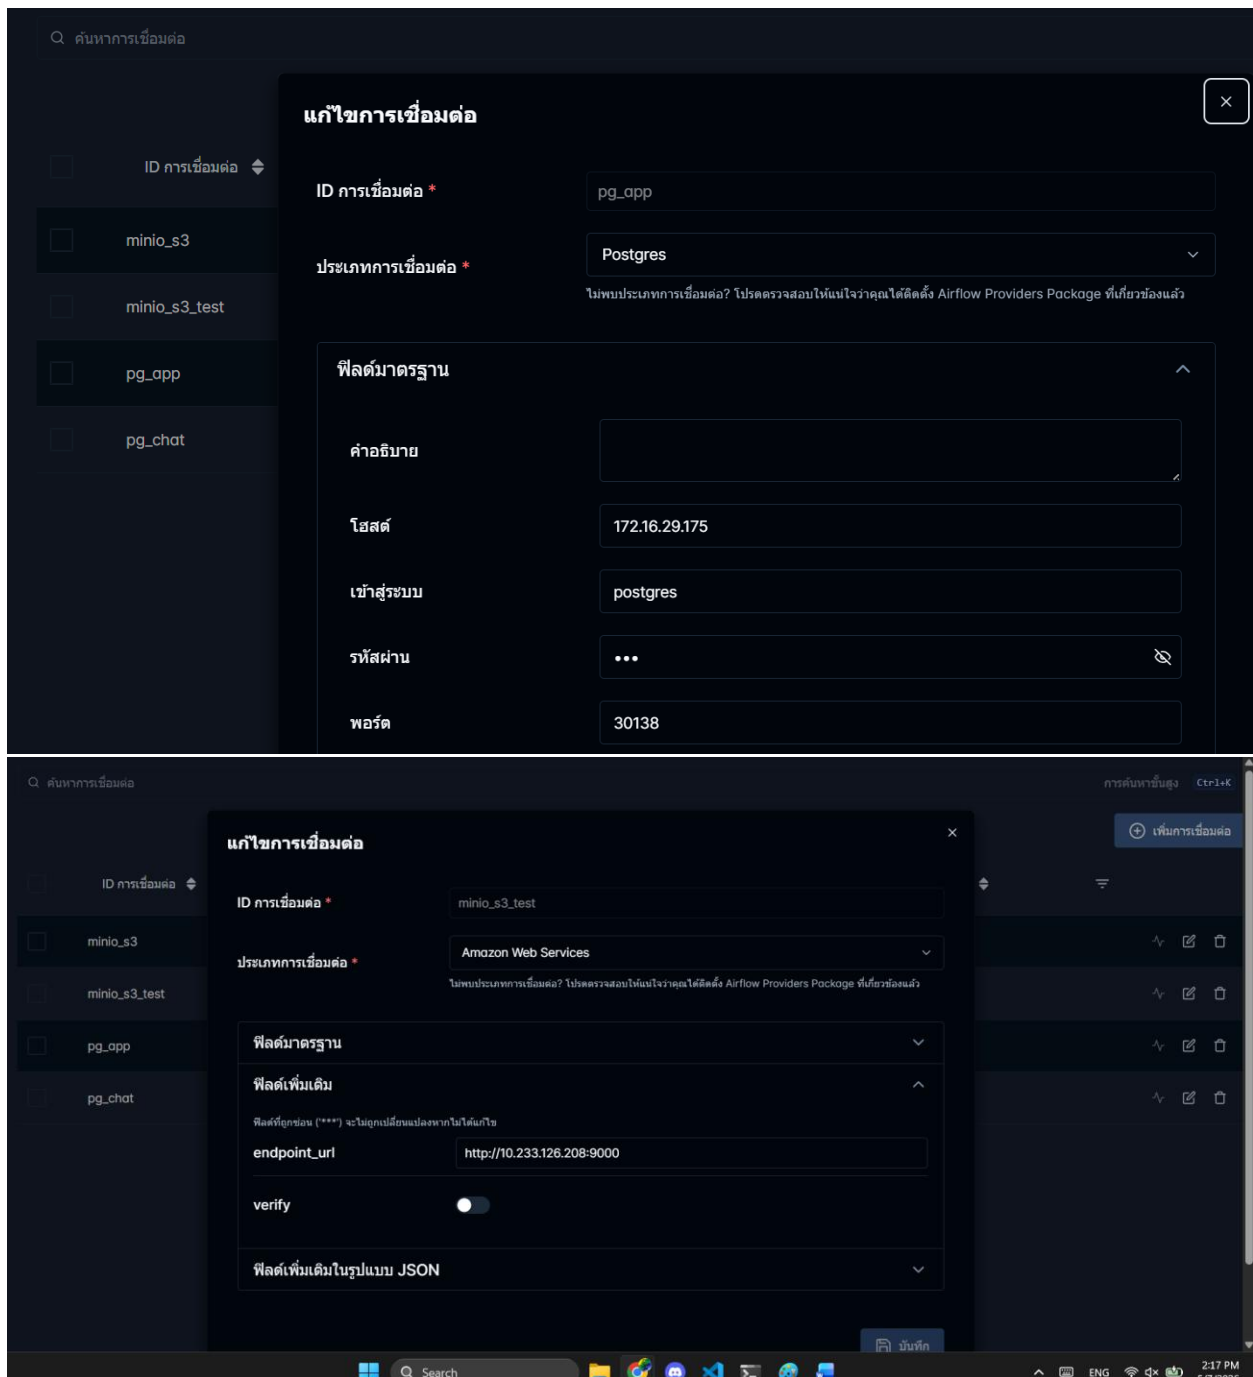

2.Minio

1.Airflow change in connection change to new API

2.Change in Prometheus via vscode for prom using the node port from minio(workspace version because in inference there no node port but it will get the same input)go to /data/prometheus.yaml

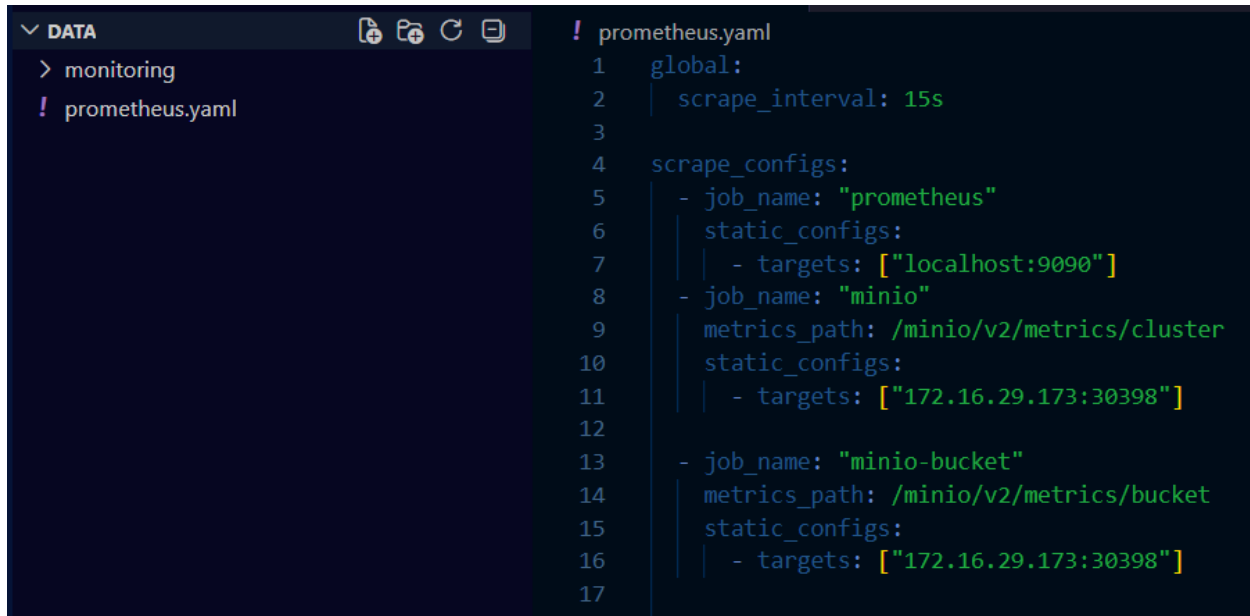


```
1 global:
2   scrape_interval: 15s
3
4 scrape_configs:
5   - job_name: "prometheus"
6     static_configs:
7       - targets: ["localhost:9090"]
8   - job_name: "minio"
9     metrics_path: /minio/v2/metrics/cluster
10    static_configs:
11      - targets: ["172.16.29.173:30398"]
12
13   - job_name: "minio-bucket"
14     metrics_path: /minio/v2/metrics/bucket
15     static_configs:
16       - targets: ["172.16.29.173:30398"]
17
```

3.vscode

Go to /home/local/data

Install code in terminal line by line in txt.txt file

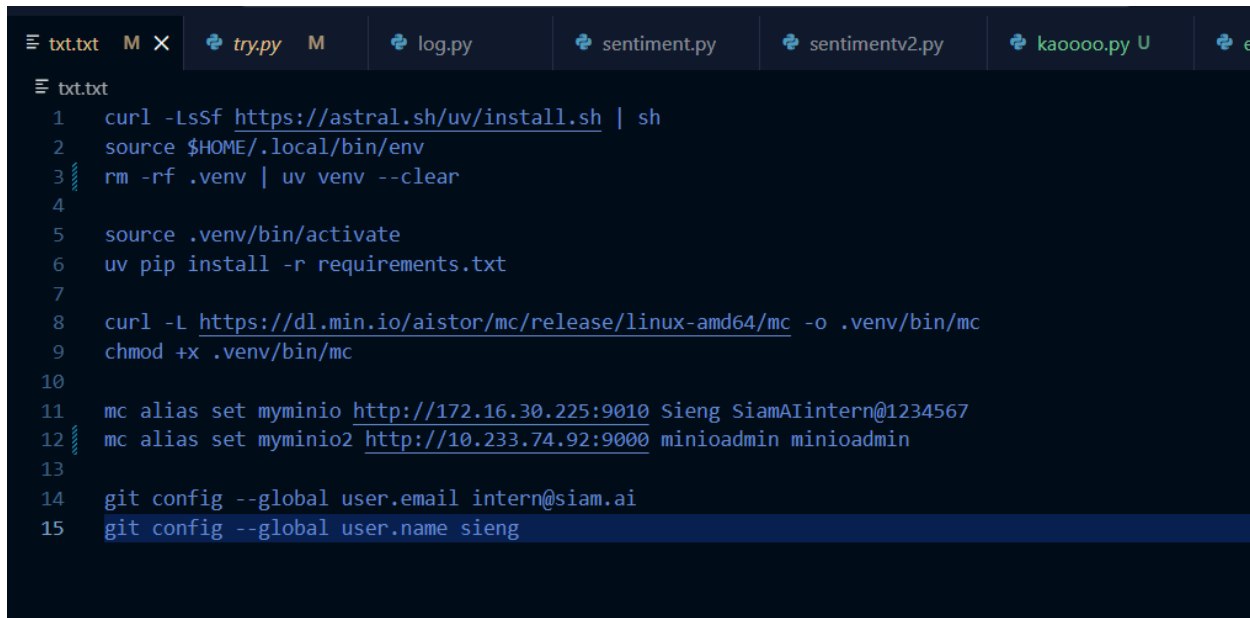

```
1 curl -Lsf https://astral.sh/uv/install.sh | sh
2 source $HOME/.local/bin/env
3 rm -rf .venv | uv venv --clear
4
5 source .venv/bin/activate
6 uv pip install -r requirements.txt
7
8 curl -L https://dl.min.io/aioadmin/release/linux-amd64/mc -o .venv/bin/mc
9 chmod +x .venv/bin/mc
10
11 mc alias set myminio http://172.16.30.225:9010 Sieng SiamAIintern@1234567
12 mc alias set myminio2 http://10.233.74.92:9000 minioadmin minioadmin
13
14 git config --global user.email intern@siam.ai
15 git config --global user.name sieng
```

Git -config user.email & user.name can change to whatever you want

