Sulaiman Kaleel – ITMO-444 AWS CLI EC2

1.
```
root@c75863f757b0:/# aws ec2 describe-instances \
--instance-ids i-0c7b05abeda7bf395 \
--query "Reservations[0].Instances[0].[State.Name,PublicIpAddress]" \
--output table \
--region us-east-2
----------------------
| DescribeInstances  |
+--------------------+
|  running           |
|  18.217.204.196    |
+--------------------+
root@c75863f757b0:/#
```

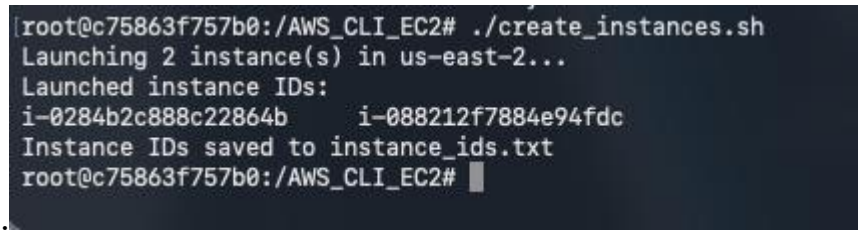
2.

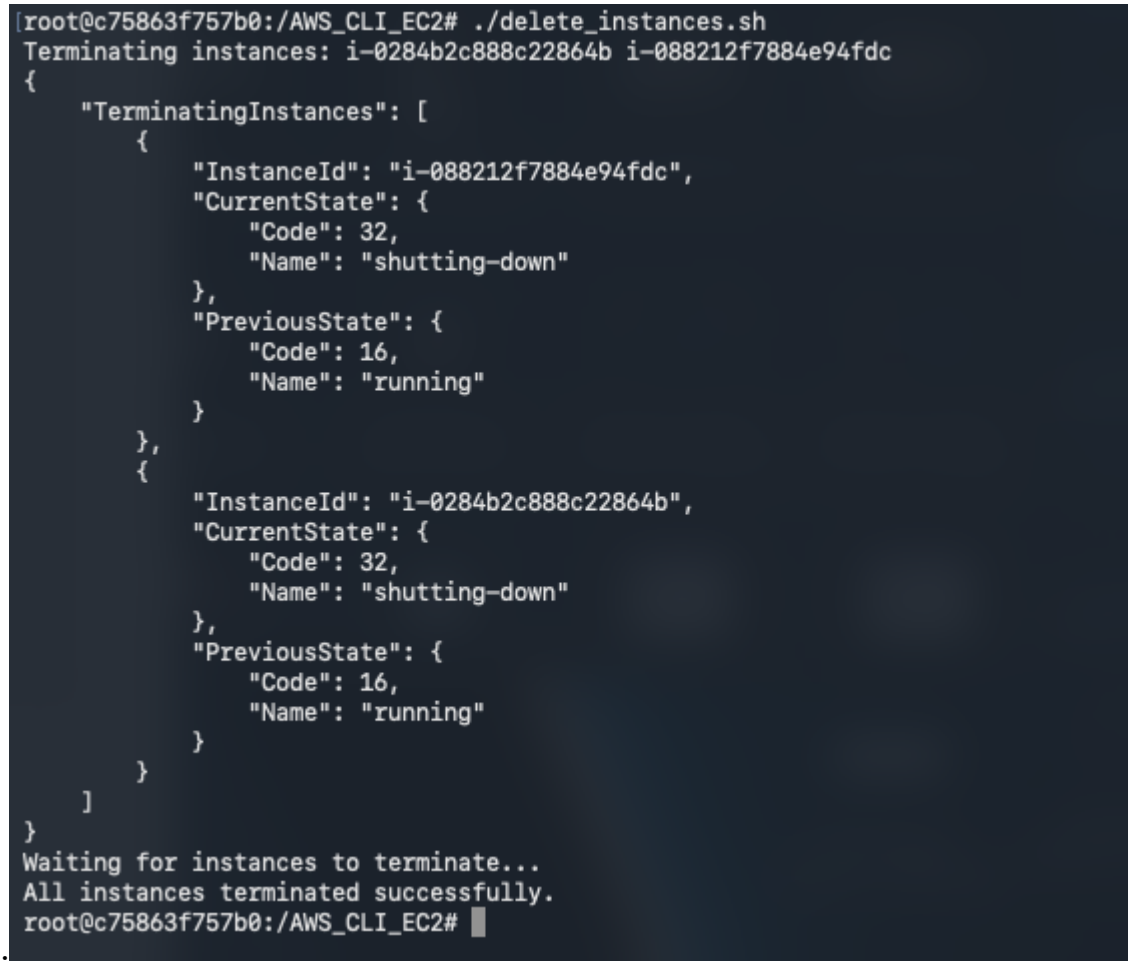


Hello from ip-172-31-37-212.us-east-2.compute.internal

3.
```
root@c75863f757b0:/AWS_CLI_EC2# git status
cat .gitignore
On branch main
Your branch is up to date with 'origin/main'.

nothing to commit, working tree clean
.env
root@c75863f757b0:/AWS_CLI_EC2#
```

4.


5.


6. https://github.com/sulaiman-kal/AWS_CLI_EC2

7. The environment files are excluded from Git as well as a private repository because they have values such as the AMI ID and the SG ID, which were not put into the example env file. Also, in real-life scenarios there may be other sensitive information in those .env files such

as private keys or tokens that shouldn't be committed publicly or privately, doing so can make that information to possibly have a chance to be exposed.