
Sulaiman Kaleel – ITMO-444 AWS EC2 S3


1.

```
root@c75863f757b0:/lab03/viewer-app# ls -l /lab03/uploader-app/ /lab03/viewer-app/
/lab03/uploader-app/:
total 8
-rw-r--r-- 1 root root 2064 Oct 22 22:58 app.js
-rw-r--r-- 1 root root  189 Oct 22 22:54 package.json


/lab03/viewer-app/:
total 8
-rw-r--r-- 1 root root 977 Oct 22 23:02 app.js
-rw-r--r-- 1 root root 157 Oct 22 23:01 package.json
root@c75863f757b0:/lab03/viewer-app#
```

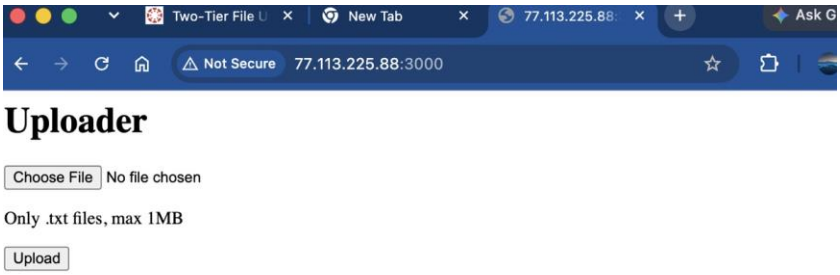

2.

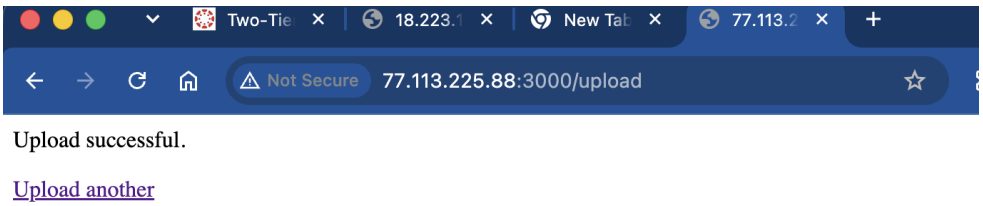


3.



Upload failed: only .txt files are allowed.

Try again

4.



Upload failed: only .txt files are allowed.


Try again

5.


Not Secure
18.223.166.130:3000
Viewer
This is the first text. Sulaiman Kaleel ITMO-444
Refresh

6.



Not Secure
18.223.166.130:3000
Viewer
This is the second text. Sulaiman Kaleel ITMO-444
Refresh

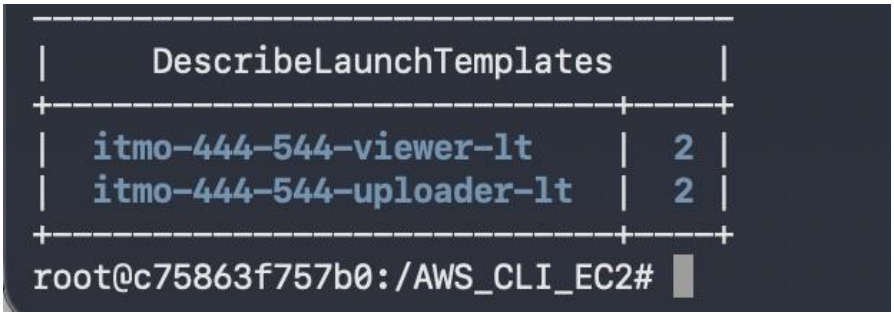7. 
DescribeLaunchTemplates
itmo-444-544-viewer-lt | 2
itmo-444-544-uploader-lt | 2
root@c75863f757b0:/AWS_CLI_EC2#
8. 
DescribeLaunchTemplateVersions
2| 2026-10-23T00:05:37+00:00
1| 2026-10-22T23:40:53+00:00
root@c75863f757b0:/AWS_CLI_EC2#

9.



```
Terminating instance: i-0b137f367ccc243c3
{
    "TerminatingInstances": [
        {
            "InstanceId": "i-0b137f367ccc243c3",
            "CurrentState": {
                "Code": 32,
                "Name": "shutting-down"
            },
            "PreviousState": {
                "Code": 16,
                "Name": "running"
            }
        }
    ]
}
== Deleting launch templates ==
{
    "LaunchTemplate": {
        "LaunchTemplateId": "lt-040f76db6b17f64d2",
        "LaunchTemplateName": "itmo-444-544-uploader-lt",
        "CreateTime": "2026-10-22T23:40:53+00:00",
        "CreatedBy": "arn:aws:iam::589354718744:user/sulaiman-kaleel",
        "DefaultVersionNumber": 1,
        "LatestVersionNumber": 2,
        "Operator": {
            "Managed": false
        }
    }
}
{
    "LaunchTemplate": {
        "LaunchTemplateId": "lt-04052495cc255f0c2",
        "LaunchTemplateName": "itmo-444-544-viewer-lt",
        "CreateTime": "2026-10-22T23:40:55+00:00",
        "CreatedBy": "arn:aws:iam::589354718744:user/sulaiman-kaleel",
        "DefaultVersionNumber": 1,
        "LatestVersionNumber": 2,
        "Operator": {
            "Managed": false
        }
    }
}
== Removing IAM instance profiles and roles ==
== Emptying and deleting S3 bucket ==
delete: s3://itmo-444-544-skaleel-fileshare/shared.txt
Cleanup complete.
root@c75863f757b0:/AWS_CLI_EC2# cd /AWS_CLI_EC2
export AWS_PAGER=""
```

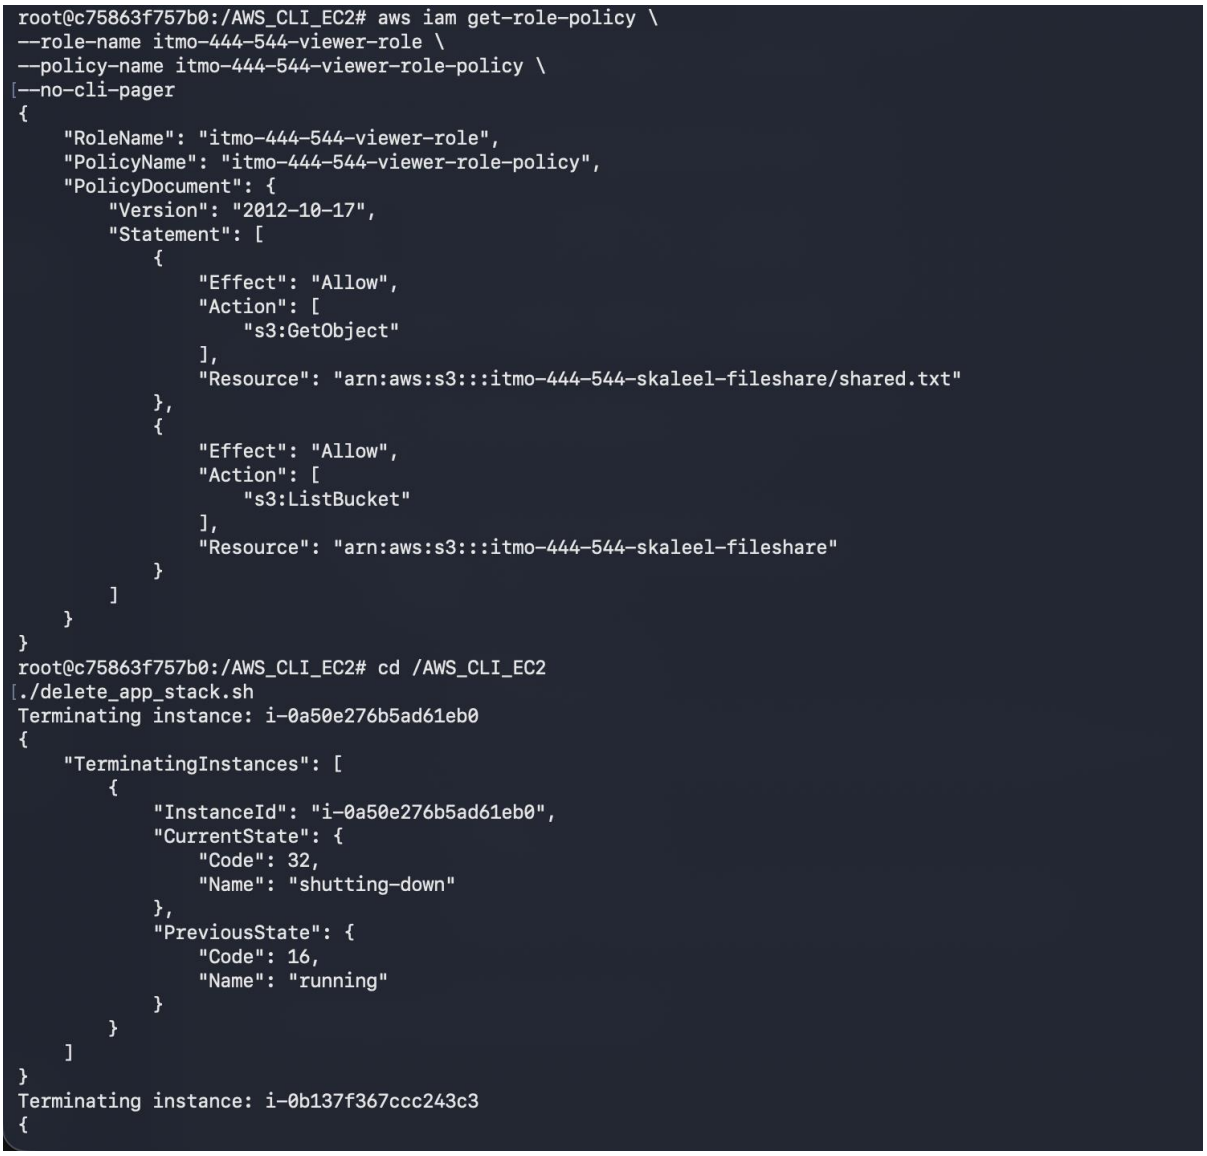

10.

Questions

1. There is a use of separate IAM roles for uploader and viewer because this will make it, so each are able to have the permissions, they need to function and nothing missing or extra. If one shared role was used with both of the permissions, there would be an unwanted read/write function for each one. This is just a practice that is seen across managing technology and doing this reduces unwanted permissions that have no purpose and make it, so each intended app has its own purpose and own purpose only.

2. The instance doesn't need credentials to fetch its code because the code is put into the user-data, and each time the instance starts for the first time it is able to create the file and doesn't need credentials each time