
Message Passing: Graph embedding spaces rely on message passing; however, information loss due to irreversible aggregation and the issue of over-smoothing during this process have become bottlenecks for downstream tasks.



IGSSE: Reversible graph embedding ensures recoverability after the graph is embedded into a set. The node set becomes an approximate equivalence class of the graph, achieving efficient graph modeling by modeling the node set.

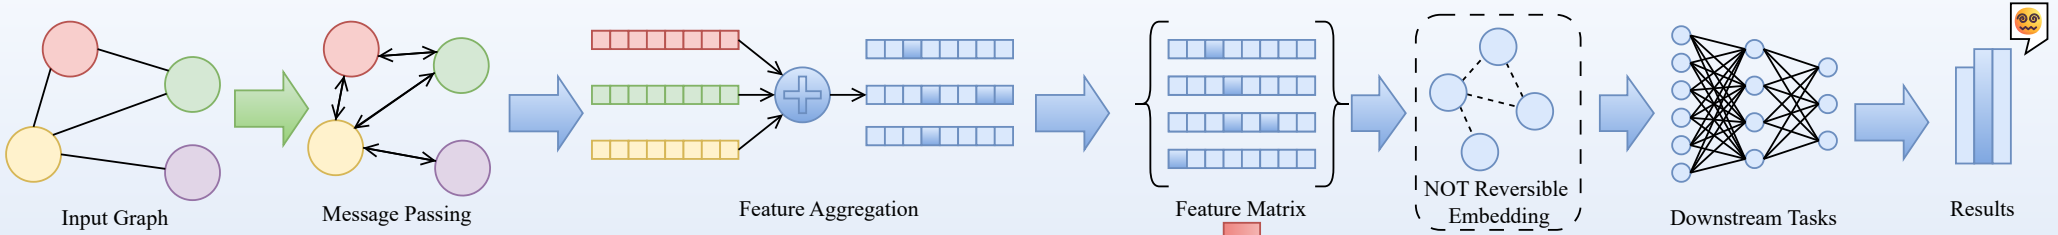