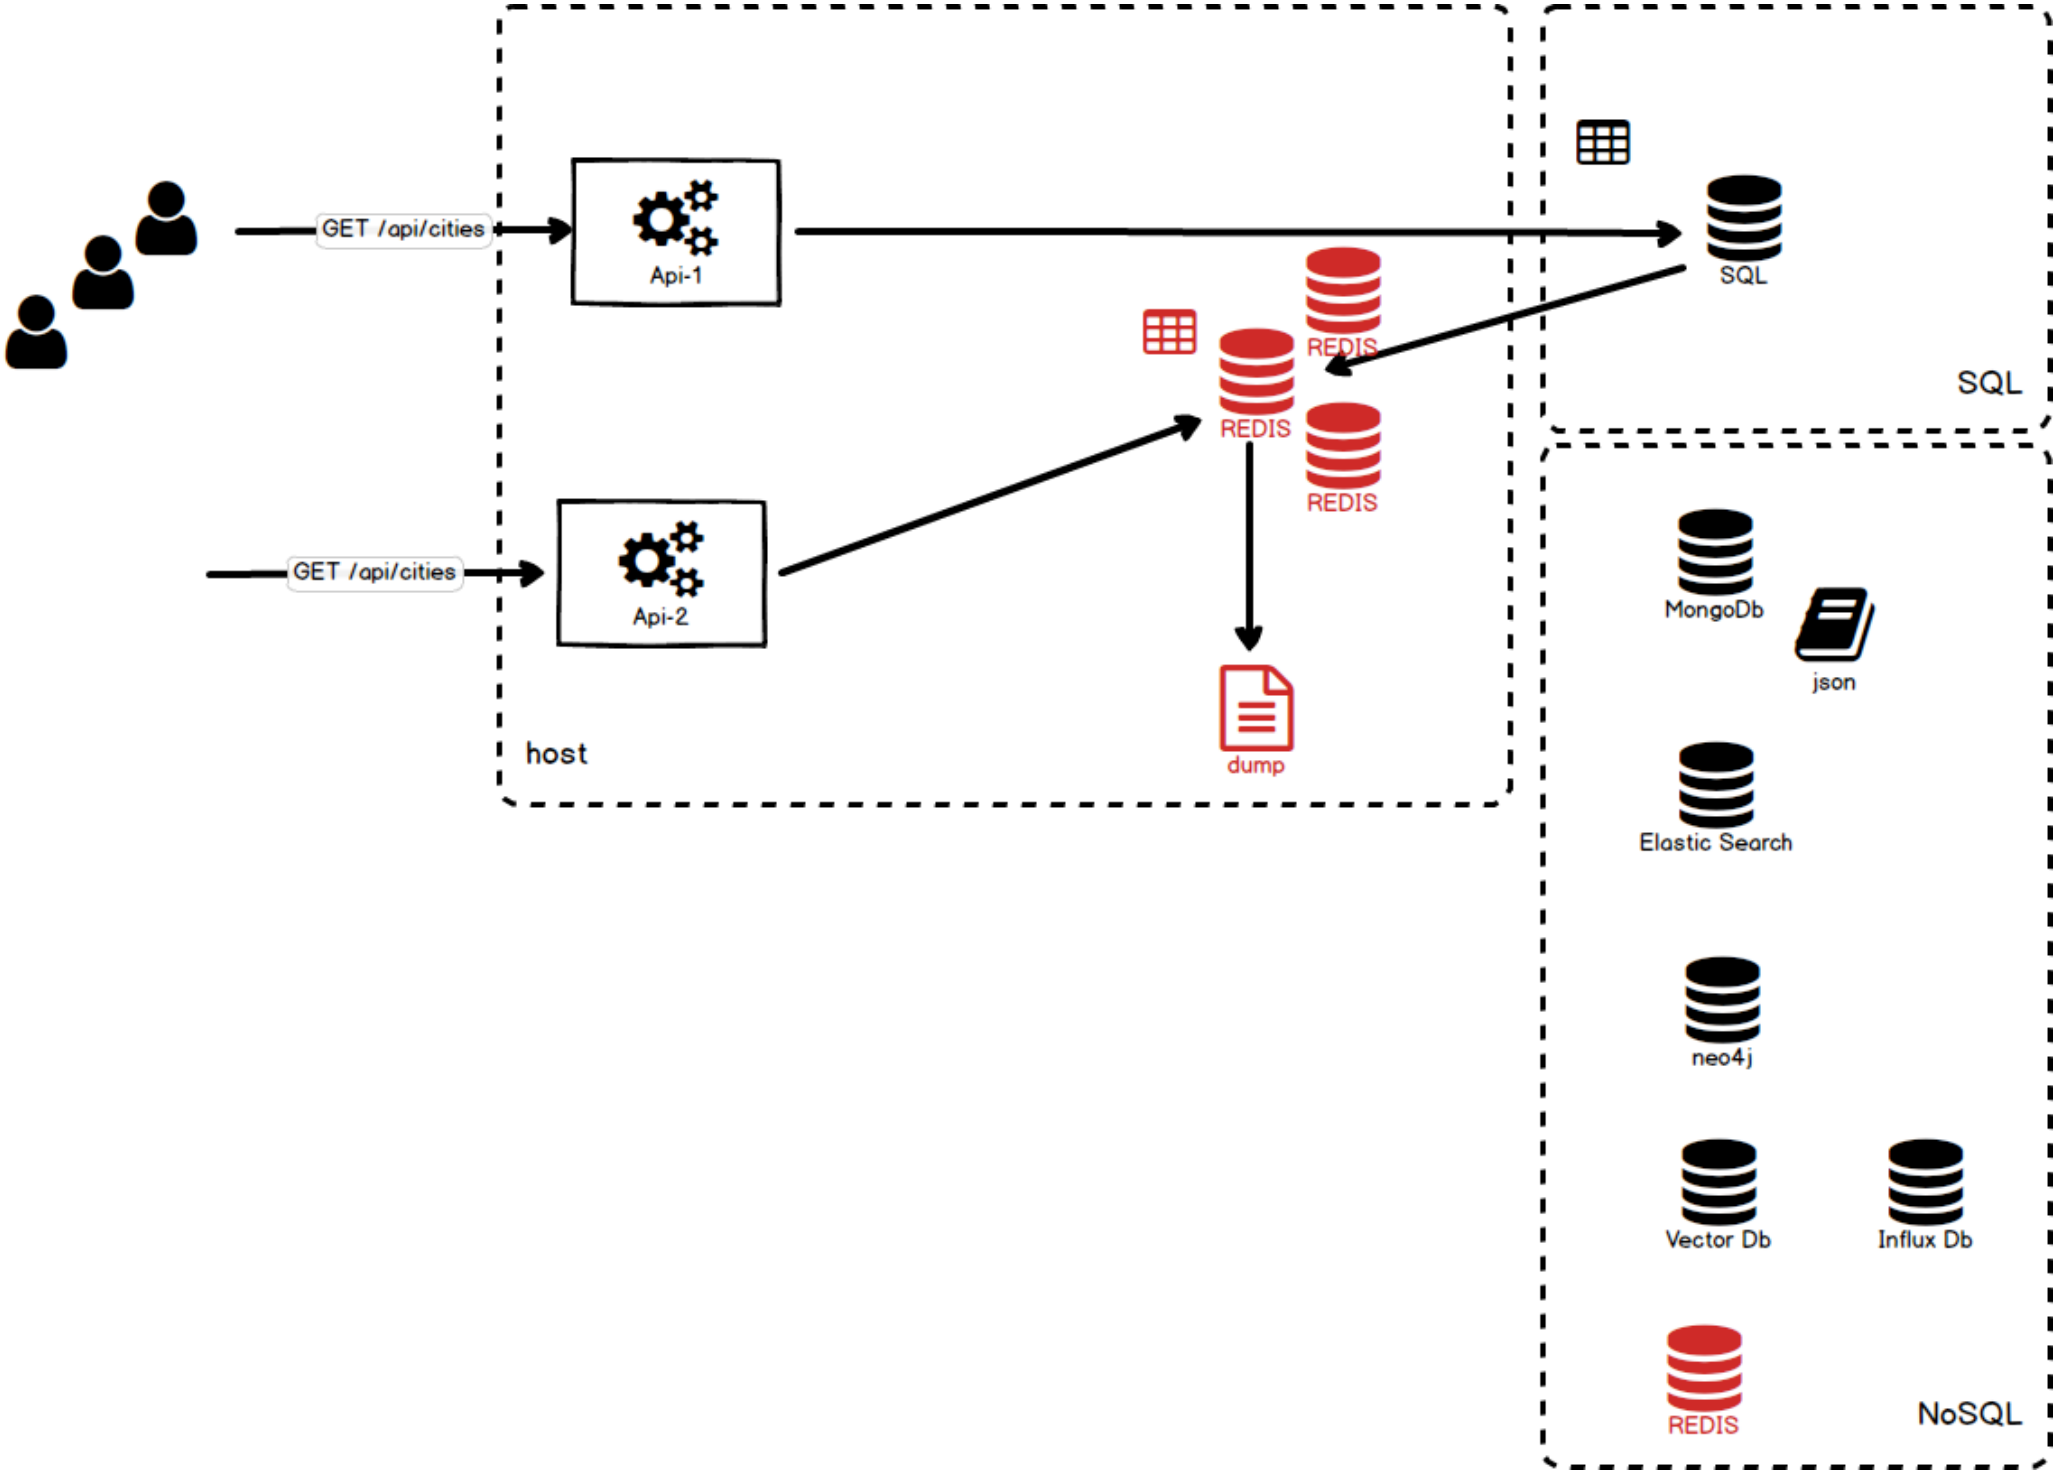
GET /api/cities
Api-1
GET /api/cities
Api-2
host
REDIS
REDIS
REDIS
dump
SQL
SQL
MongoDb
json
Elastic Search
neo4j
Vector Db
Influx Db
REDIS
NoSQL

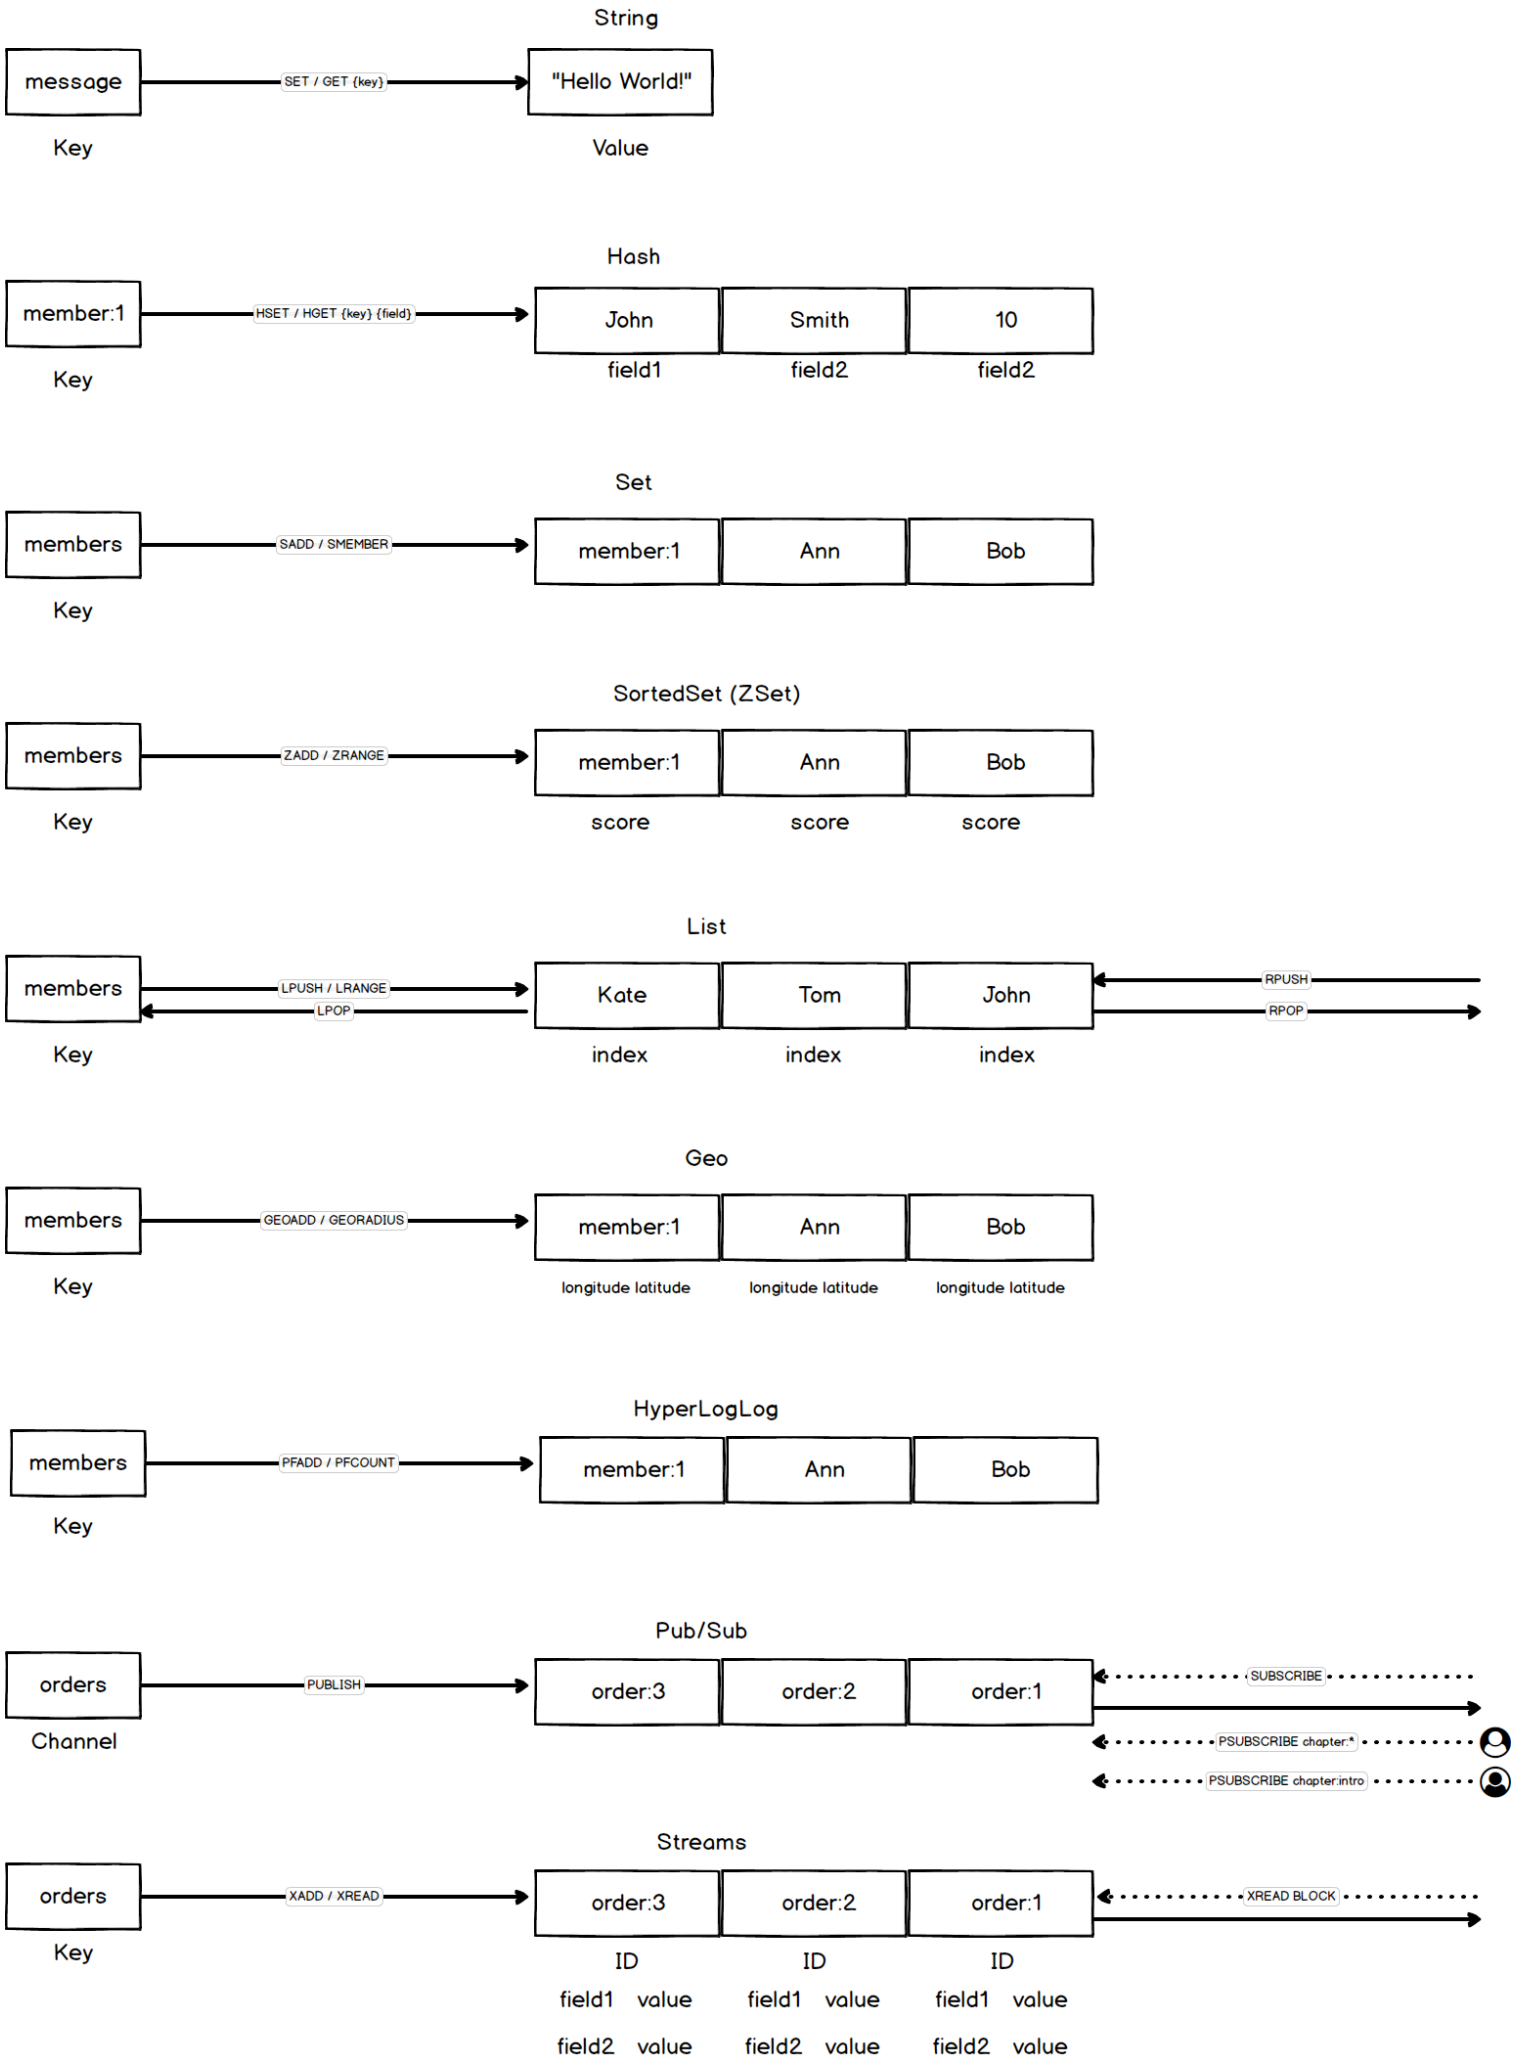
String
message
SET / GET {key}
"Hello World!"
Key
Value
Hash
member:1
HSET / HGET {key} {field}
John
Smith
10
Key
field1
field2
field2
Set
members
SADD / SMEMBER
member:1
Ann
Bob
Key
SortedSet (ZSet)
members
ZADD / ZRANGE
member:1
Ann
Bob
Key
score
score
score
List
members
LPUSH / LRANGE
LPOP
Kate
Tom
John
RPUSH
RPOP
Key
index
index
index
Geo
members
GEOADD / GEORADIUS
member:1
Ann
Bob
Key
longitude latitude
longitude latitude
longitude latitude
HyperLogLog
members
PFADD / PFCOUNT
member:1
Ann
Bob
Key
Pub/Sub
orders
PUBLISH
order:3
order:2
order:1
SUBSCRIBE
PSUBSCRIBE chapter:*
PSUBSCRIBE chapter:intro
Channel
Streams
orders
XADD / XREAD
order:3
order:2
order:1
XREAD BLOCK
Key
ID
ID
ID
field1 value
field1 value
field1 value
field2 value
field2 value
field2 value

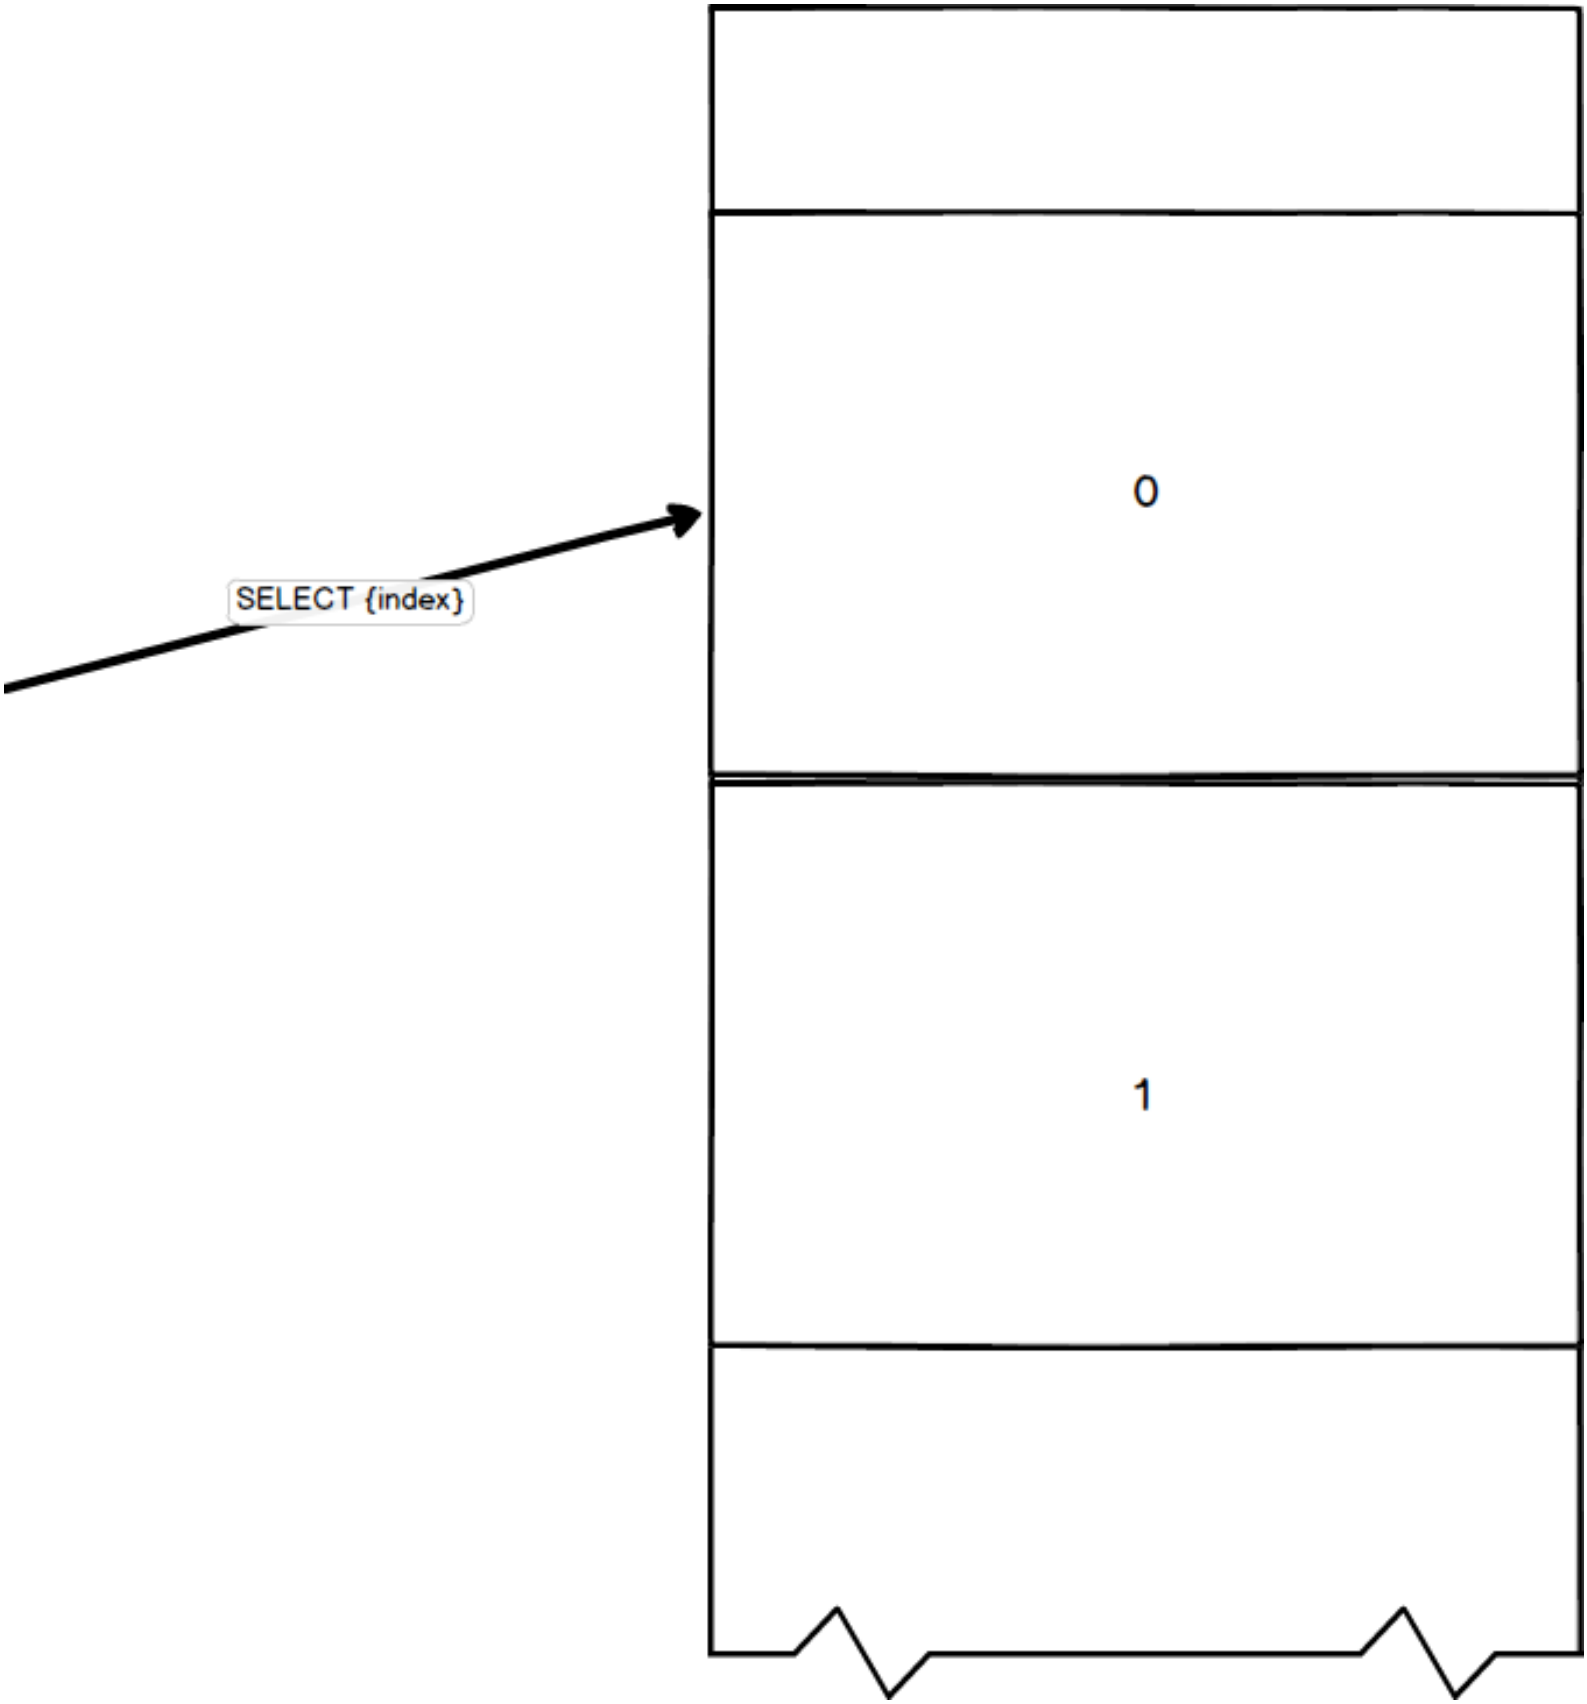
SELECT {index}
0
1

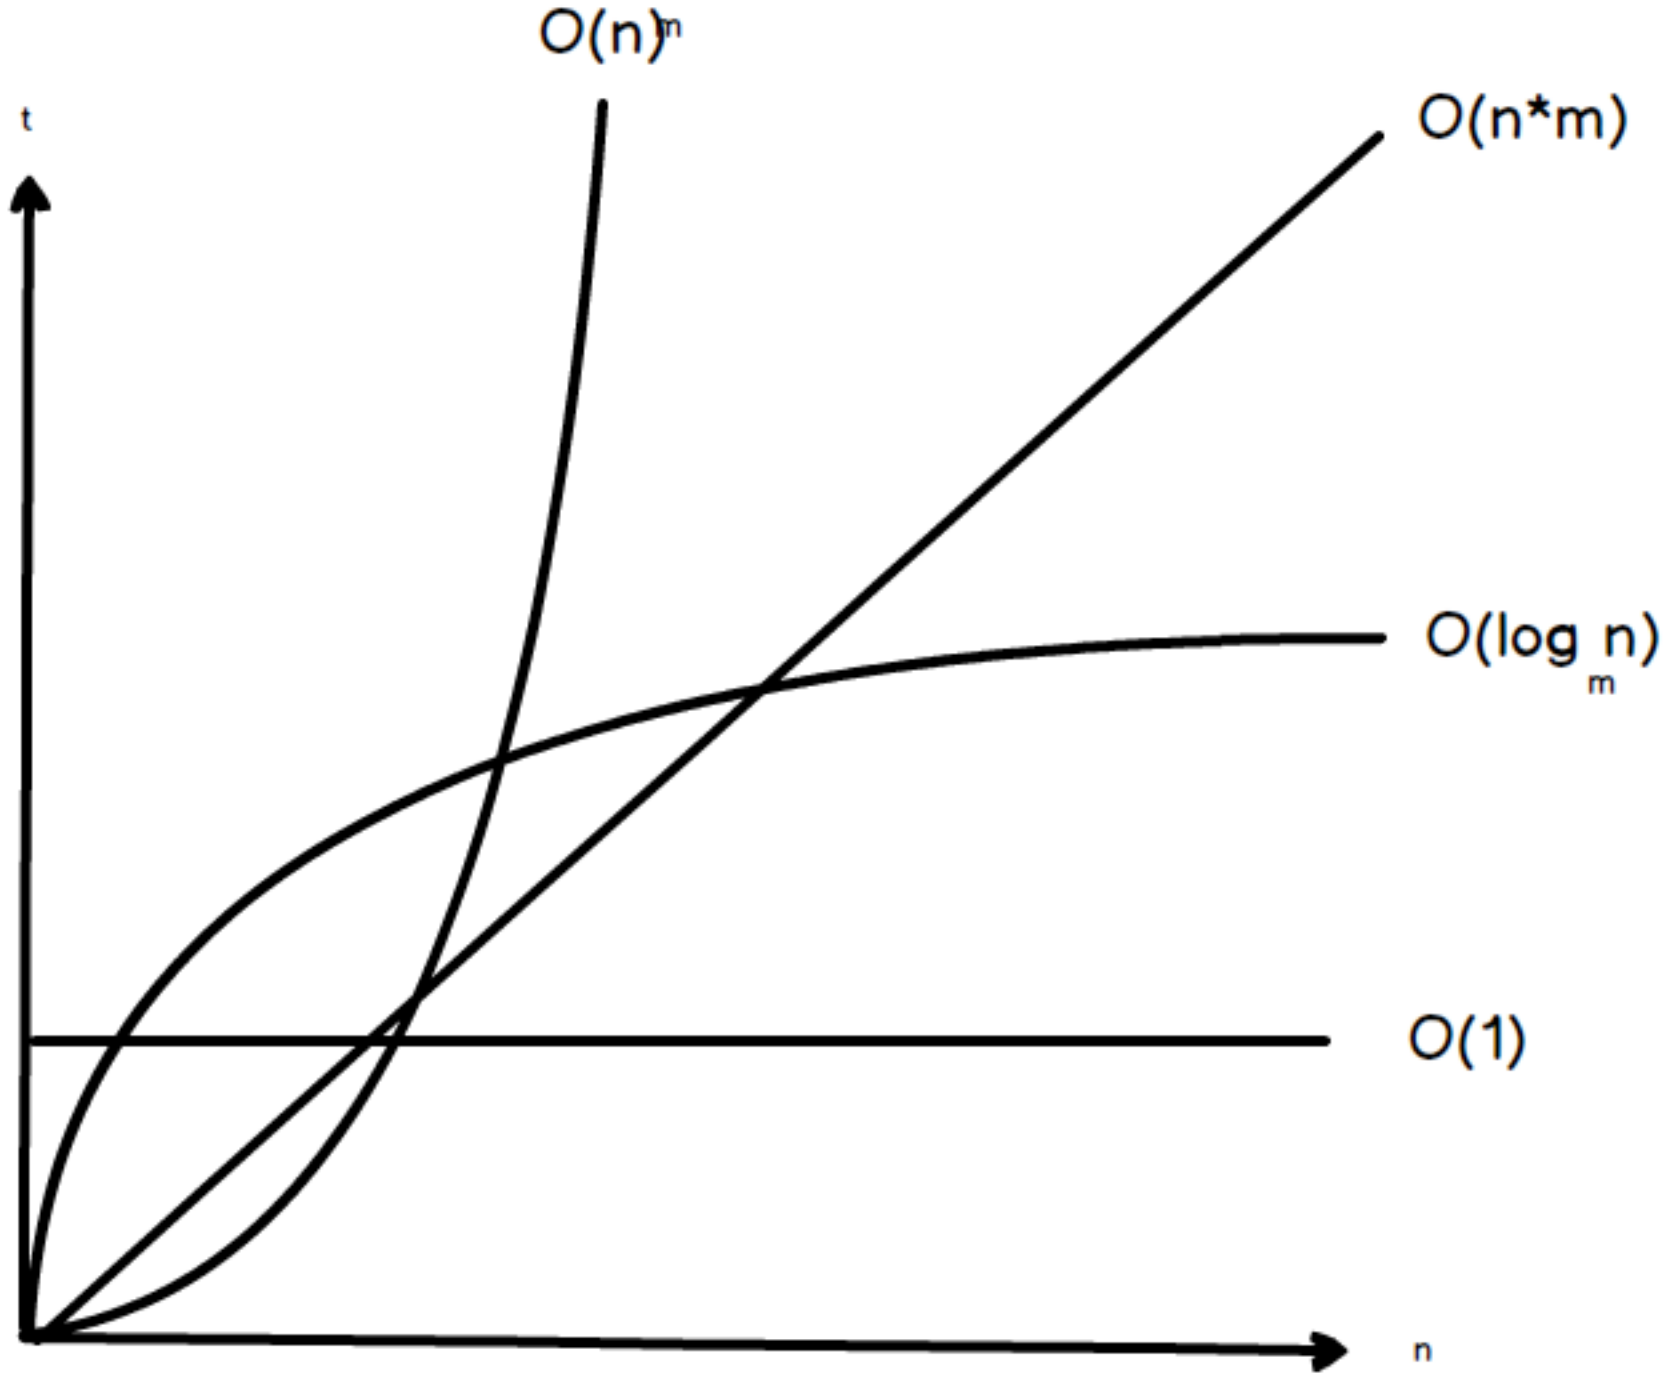
O(n)^m
t
O(n*m)
O(log_m n)
O(1)
n

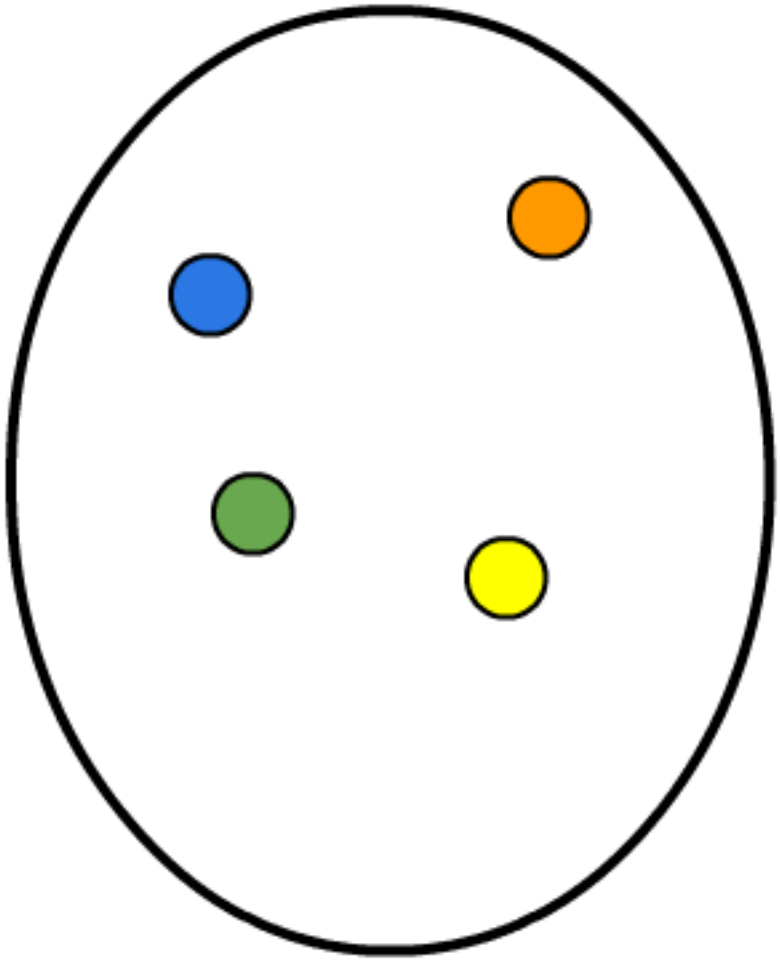

> product: B size: x=210 mm y=520mm

> size: x=350 mm y=120mm

200 300

	100-200	200-300	> 300		
A	50 PLN	75 PLN	120 PLN		
B	150 PLN	**250 PLN**	**350 PLN**		
C	450 PLN				

200 300

	100-200	200-300	> 300		
100 - 500	50 PLN	75 PLN	120 PLN		
500 - 2500	150 PLN	**250 PLN**	**350 PLN**		
>2500	450 PLN				

100-500	500-2500	>2500
A	B	C

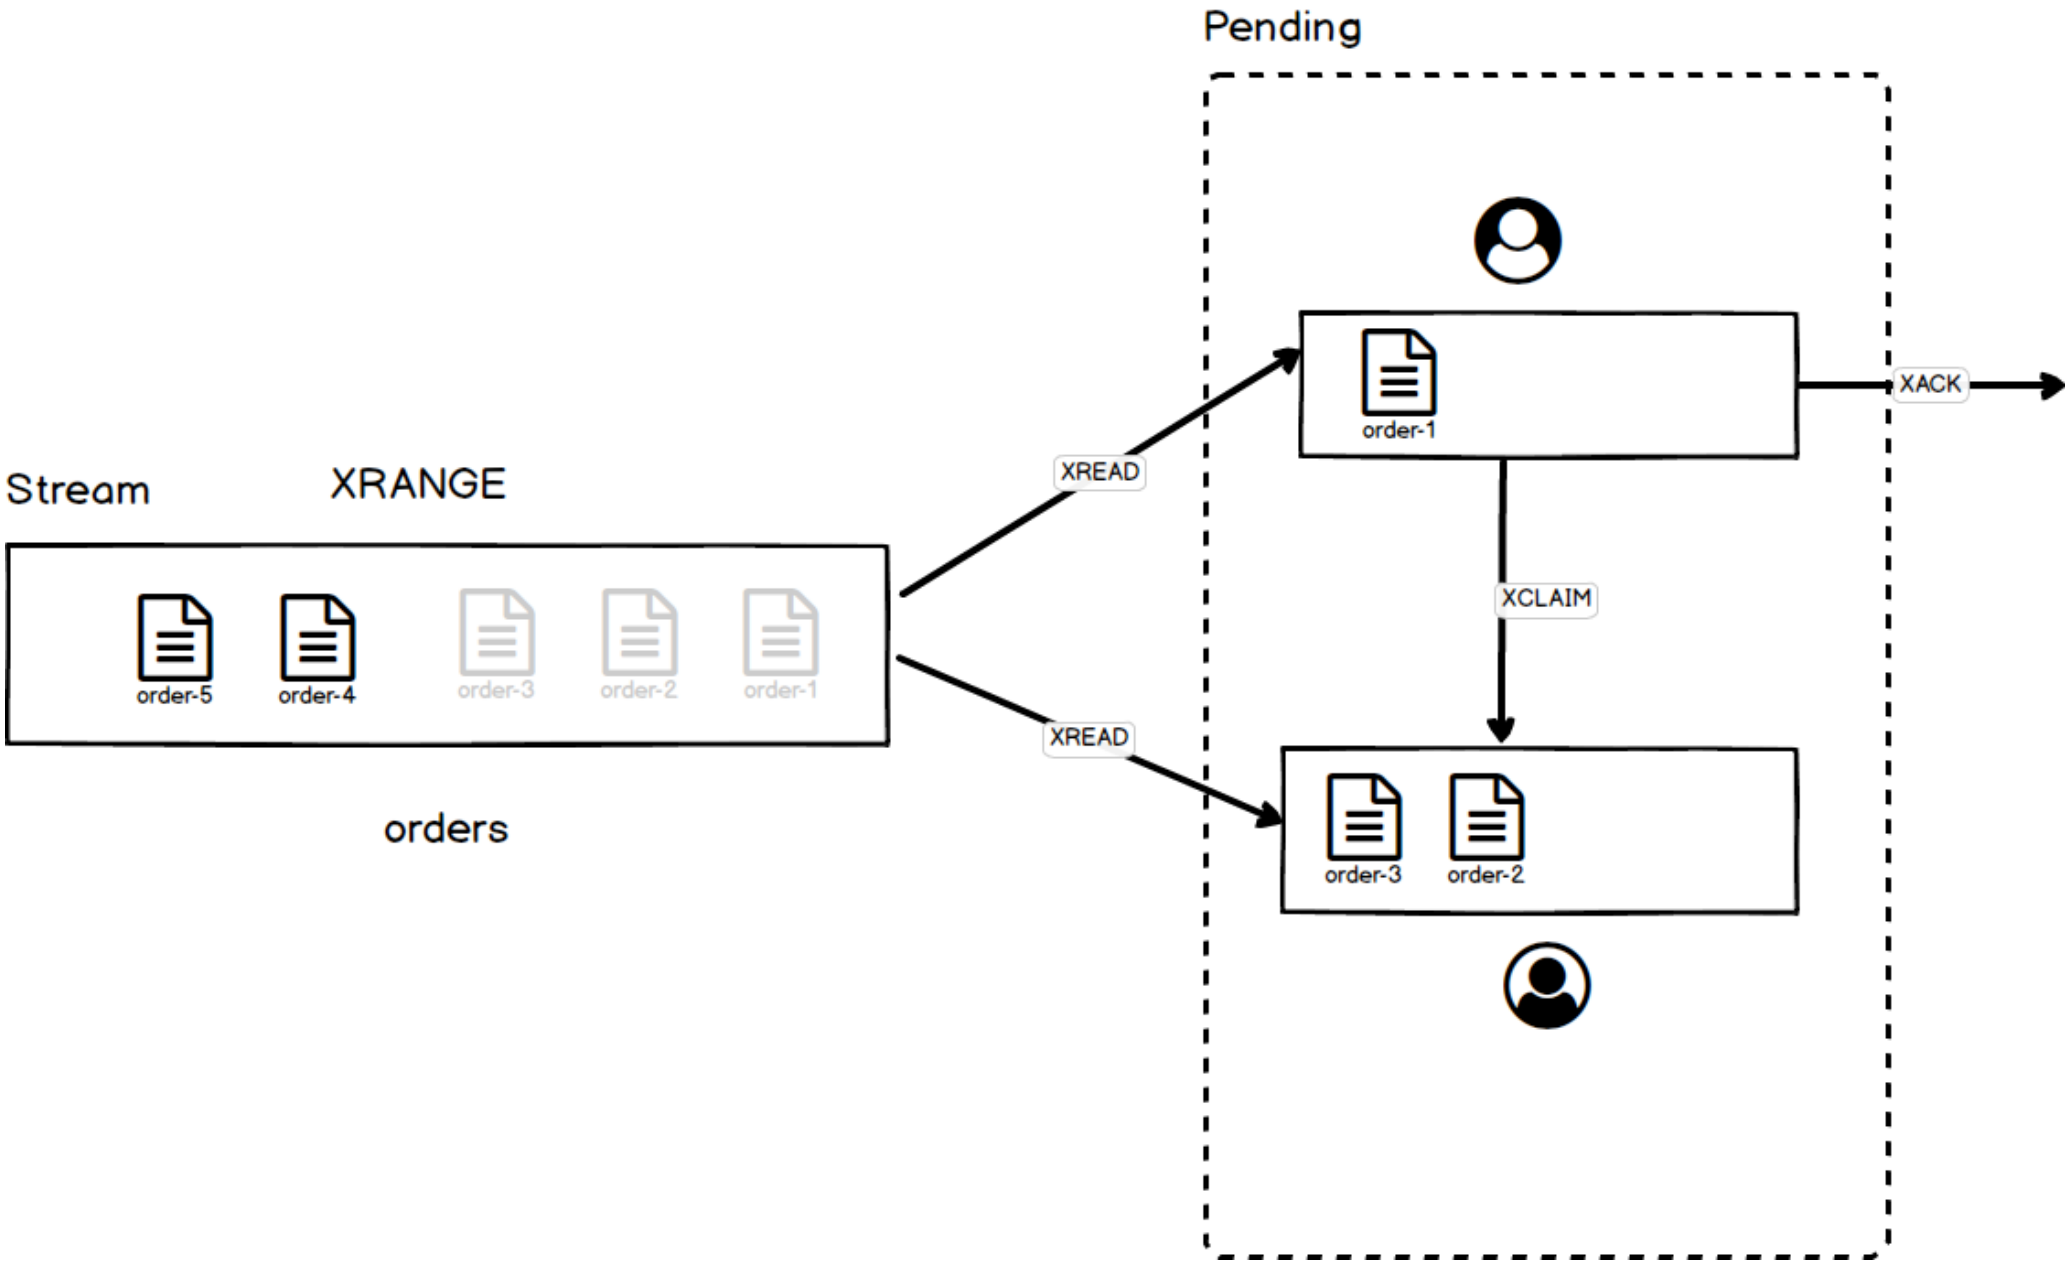
Pending
Stream
XRANGE
order-5
order-4
order-3
order-2
order-1
orders
XREAD
XREAD
order-1
XACK
XCLAIM
order-3
order-2

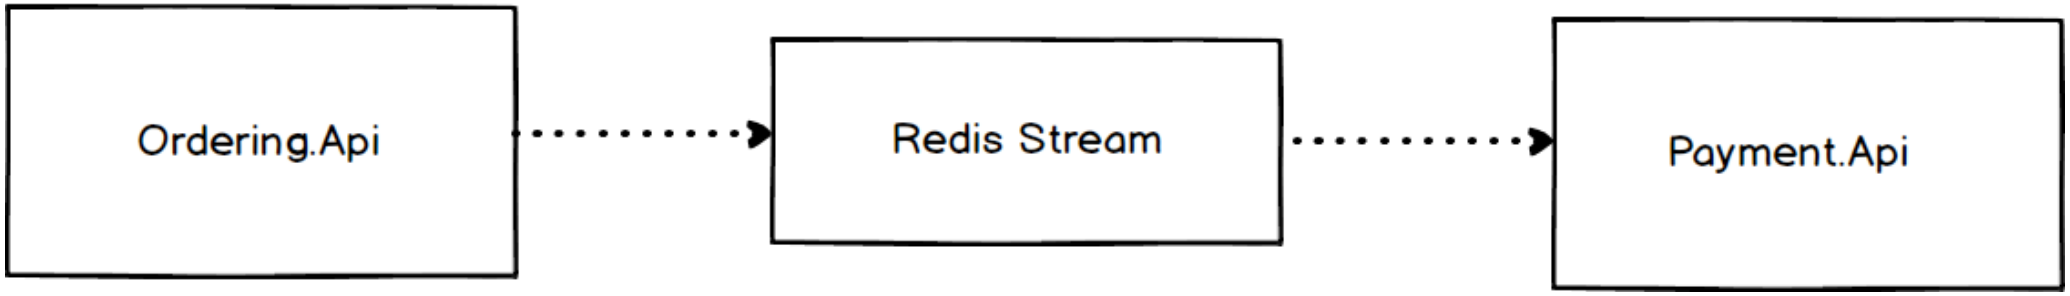
Ordering.Api
Redis Stream
Payment.Api

File1.txt:permission

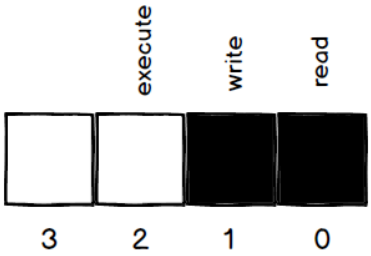

File1.exe.user:1

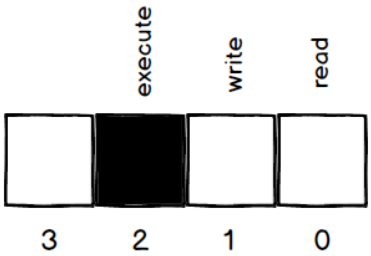

File1.exe.user:2

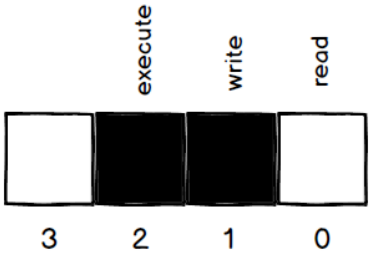

---

user:0

user:1

user:2

user:3

article:1



article:2

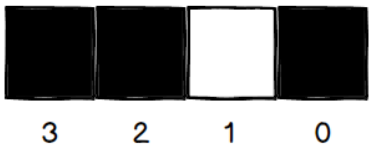

AND

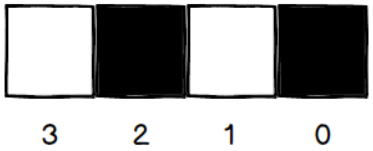

OR

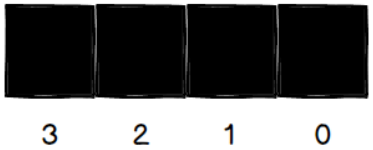

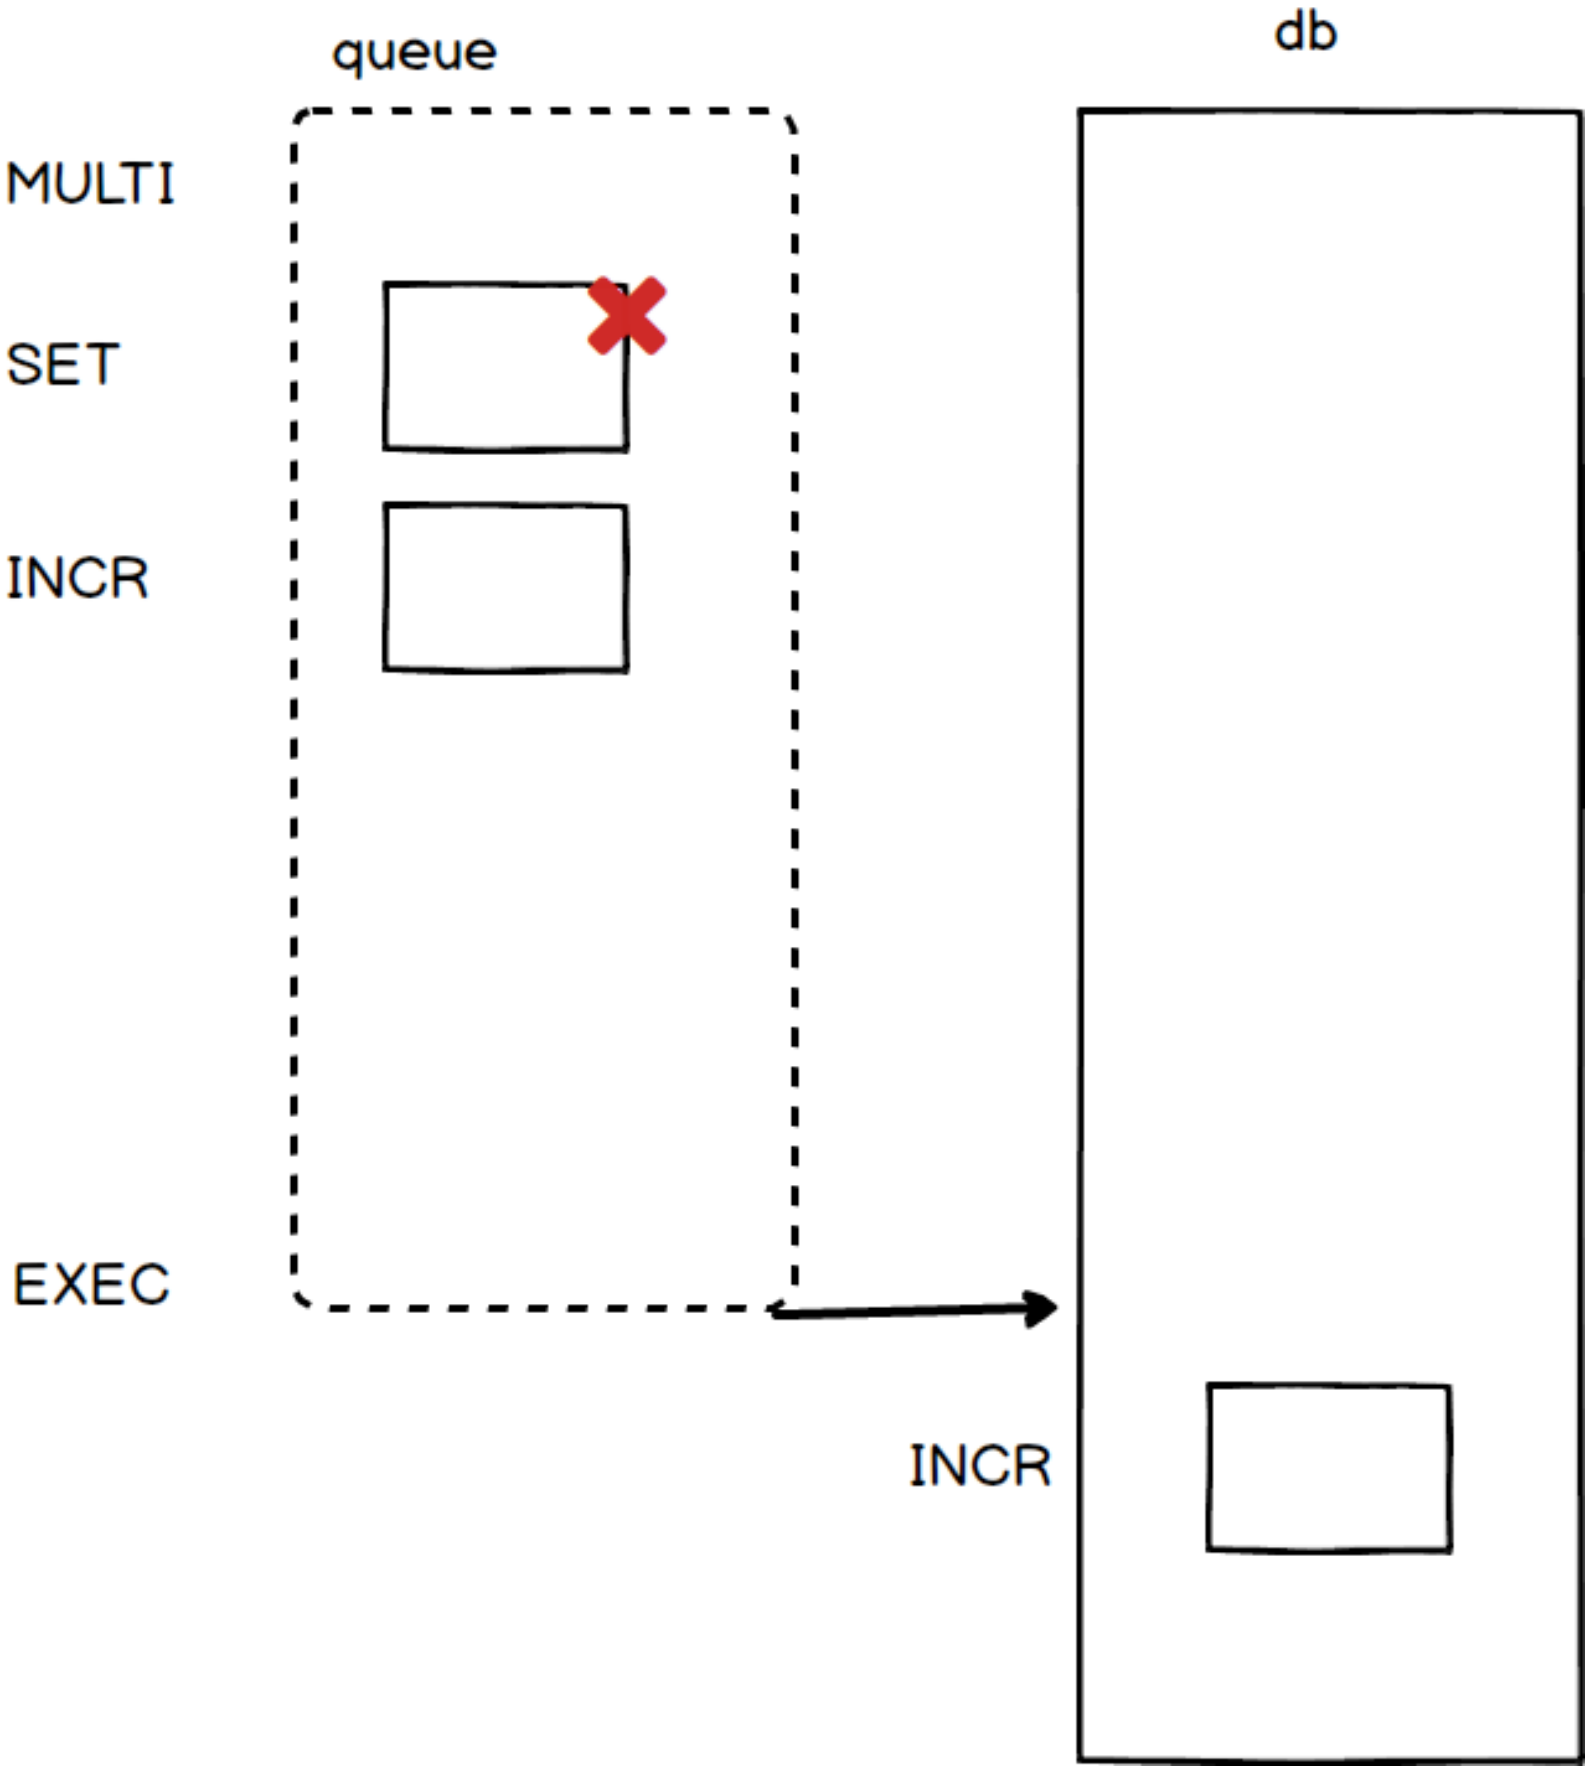
queue
db
MULTI
SET
INCR
EXEC
INCR

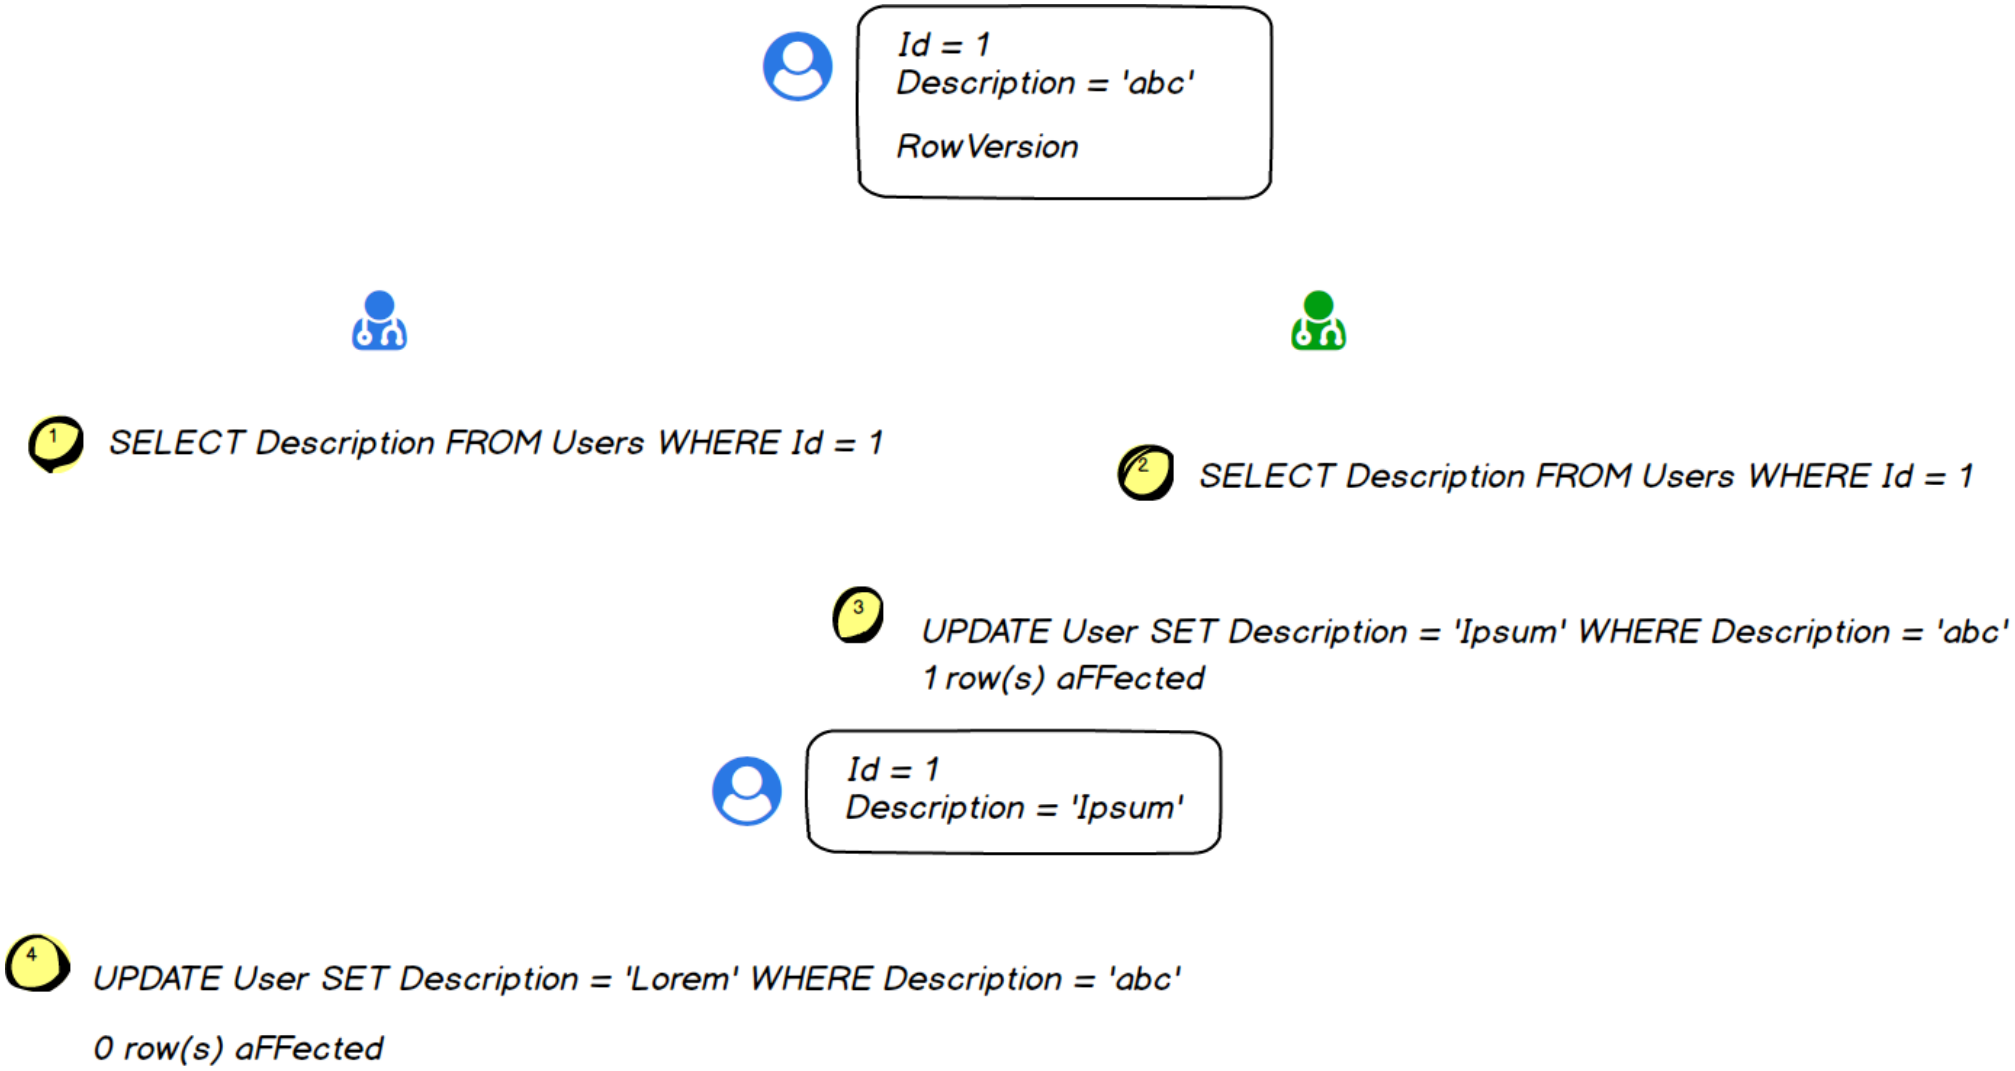
Id = 1
Description = 'abc'
RowVersion
1
SELECT Description FROM Users WHERE Id = 1
2
SELECT Description FROM Users WHERE Id = 1
3
UPDATE User SET Description = 'Ipsum' WHERE Description = 'abc'
1 row(s) aFFected
Id = 1
Description = 'Ipsum'
4
UPDATE User SET Description = 'Lorem' WHERE Description = 'abc'
0 row(s) aFFected