


GET api/reports?From=2020-01-01&To2020-03-31

GET api/customers/{customerId}/reports

GET api/customers/{customerId}/reports/{reportId}


GET api/reports/{reportId}



HTTP (5000)

HTTPS (5001)



API

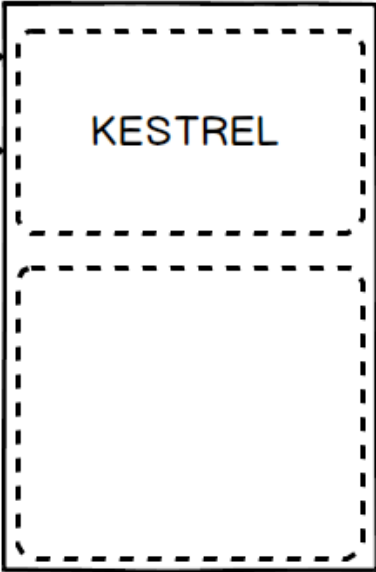


- GET api/customers
- GET api/customers/male
- GET api/customers/female
- GET api/customers/10
- GET api/customers/01-999
- GET api/customers/0234565645645645
- GET api/customers?FirstName=John&From=100&To=200
- GET api/customers/10/orders
  
- POST api/customers      utwórz
- PUT api/customers/10      zamień
- PATCH api/customers/10      zmień
  
- DELETE api/customers/10      usuń

pipeline



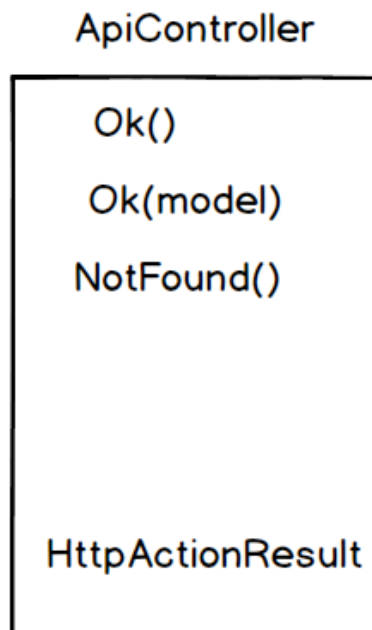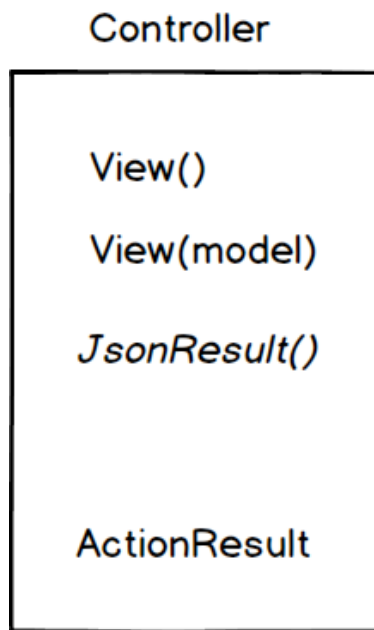

.NET Framework

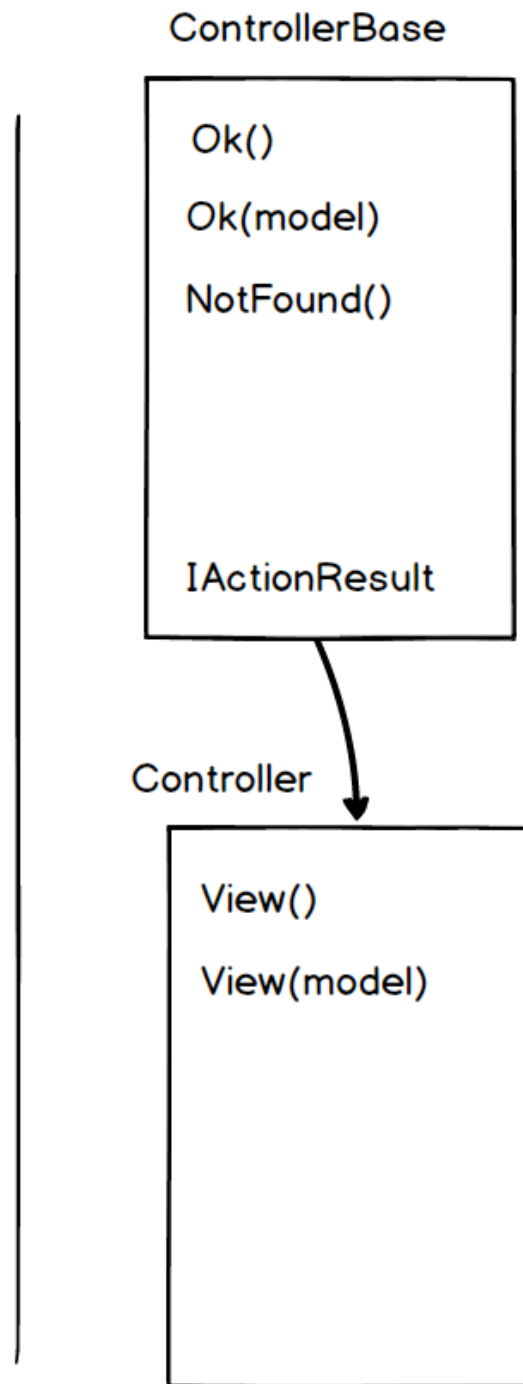

.NET Core

appsettings.json





appsettings.xml



IConfiguration



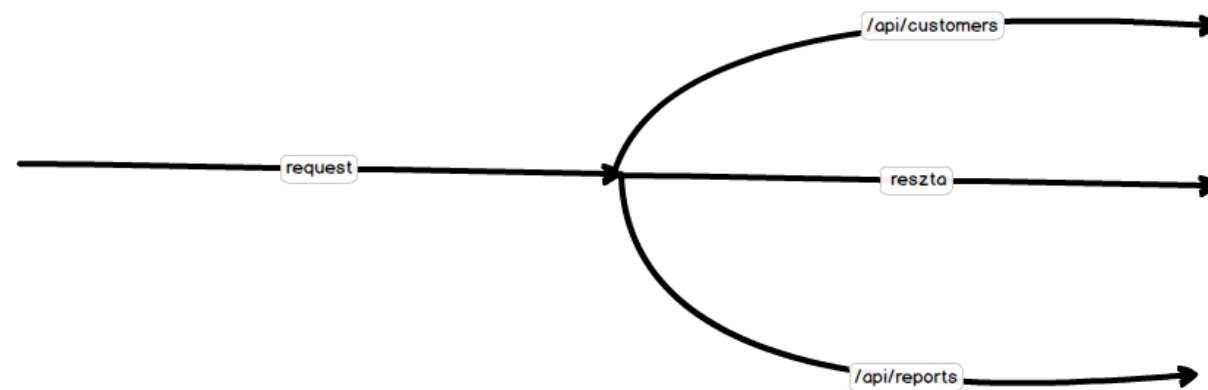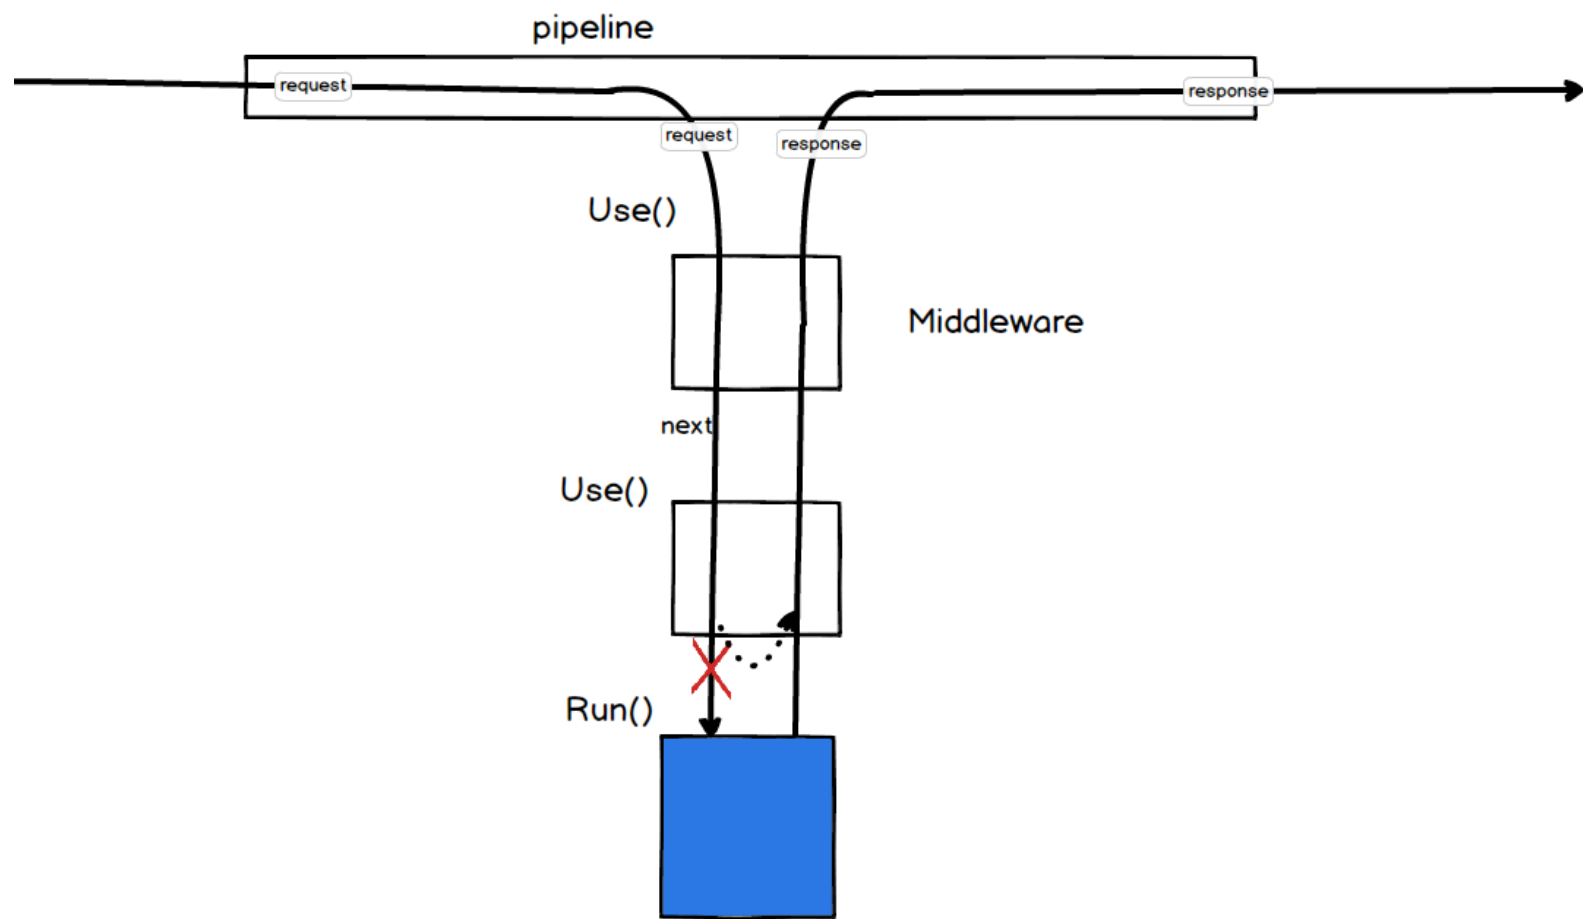



## pipeline

request

response

```
GET http://localhost:5000/api/customers/10 HTTP/1.1
Host: localhost
Accept: application/json
```

IDictionary<string, string[]>

key	value
method	GET
path	http://localhost:5000/api/customers/10
protocol	HTTP
host	localhost
accept	application/json