

interface ICustomerRepository

class CustomersController



WebApi

Get()

SQL




SQL Server

recordset

GET http://localhost:5000/api/customers



route

json

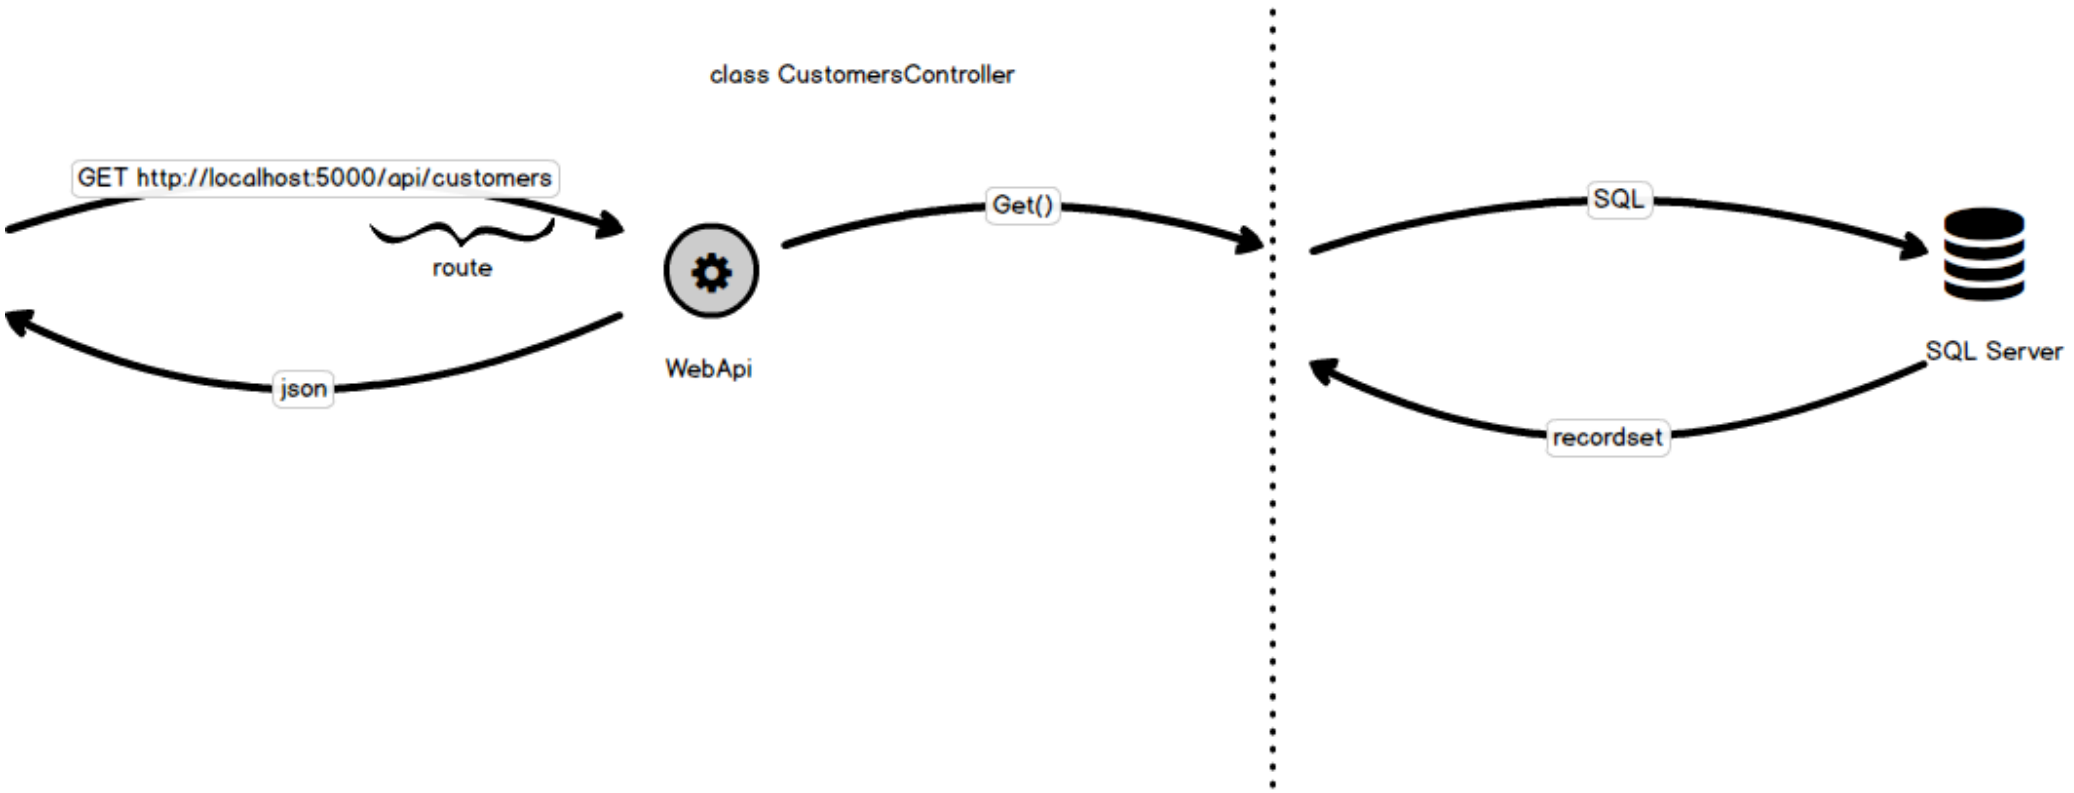

```
builder.Services.Add<ICustomerRepository, FakeCustomerRepository>();
```

Type	Value	Cykl życia
<i>ICustomerRepository</i>	FakeCustomerRepository DbCustomerRepository	Singleton
Faker<Customer>	CustomerFaker	Singleton

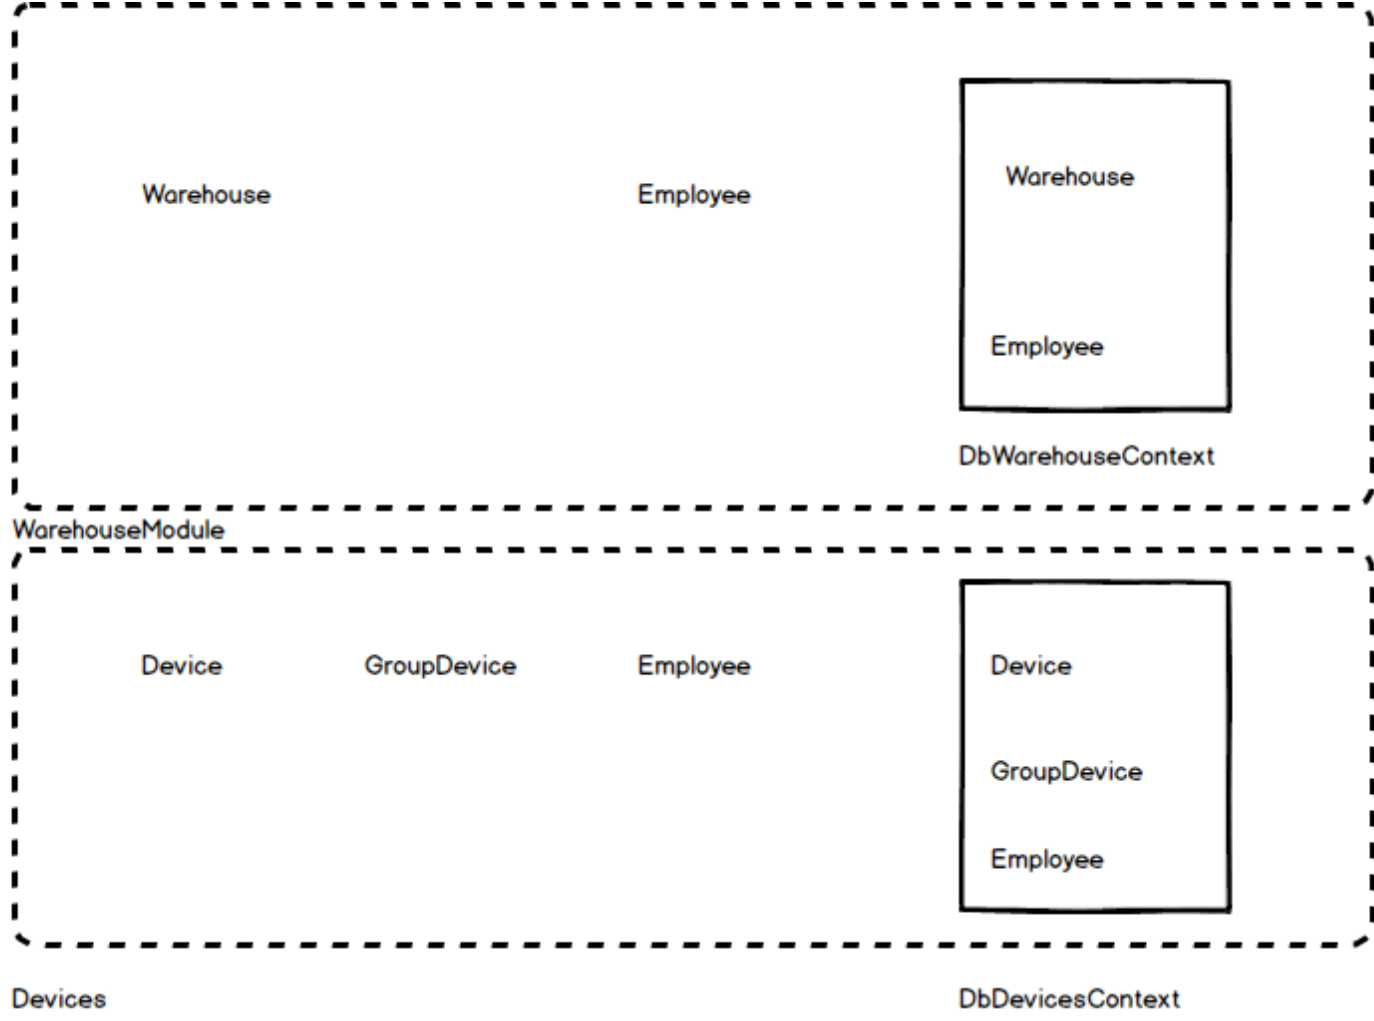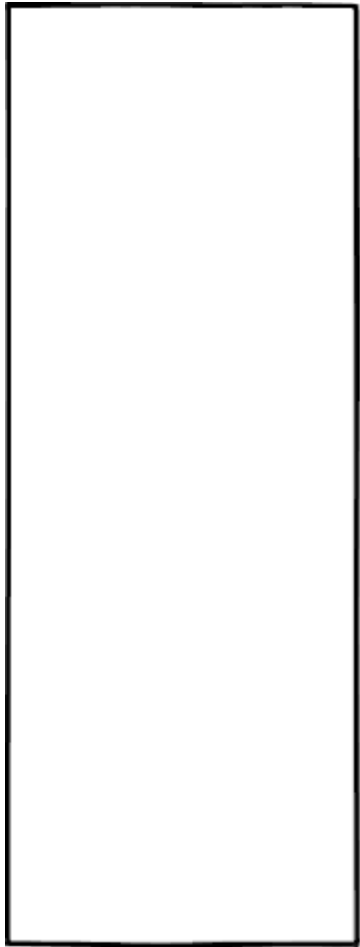



http://




Some text



Some text



Some text



Some text



Some text



Some text



Some text




GET api/customers/{id}/orders



CustomersController

OrdersController





View

Controller

Model



MVC

GET api/customers HTTP/1.1

Host: localhost:5001

Accept: application/xml

—

200 OK

Content-Type: application/json

Server: kestrel

POST api/customers HTTP/1.1

Host: localhost:5001

Content-Type: application/json

Accept: application/xml

{ json }

—

201 Created

Content-Type: application/json

Server: kestrel

Location:

