

Window Name

John Smith

DataContext = {Binding Period}

Period

//

ComboBox

//

Address

Descriptions

ComboBox

ComboBox

Save

CustomerSearchCriteria

EmployeeSearchCriteria

CustomerPeriod

From
To
Kind

AddressSearchCriteria

City
Country
ZipCode

City
Country
ZipCode

VehicleTypeSearchCriteria

VehicleType
Customer Type

Window Name

Period

//

Address

Descriptions

ComboBox

Save

AddressUserControl

Shape

Geometry

RenderedGeometry

Data

Stroke

Fill



Line



Rectangle


Ellipse

LineGeometry




RectangleGeometry

EllipseGeometry

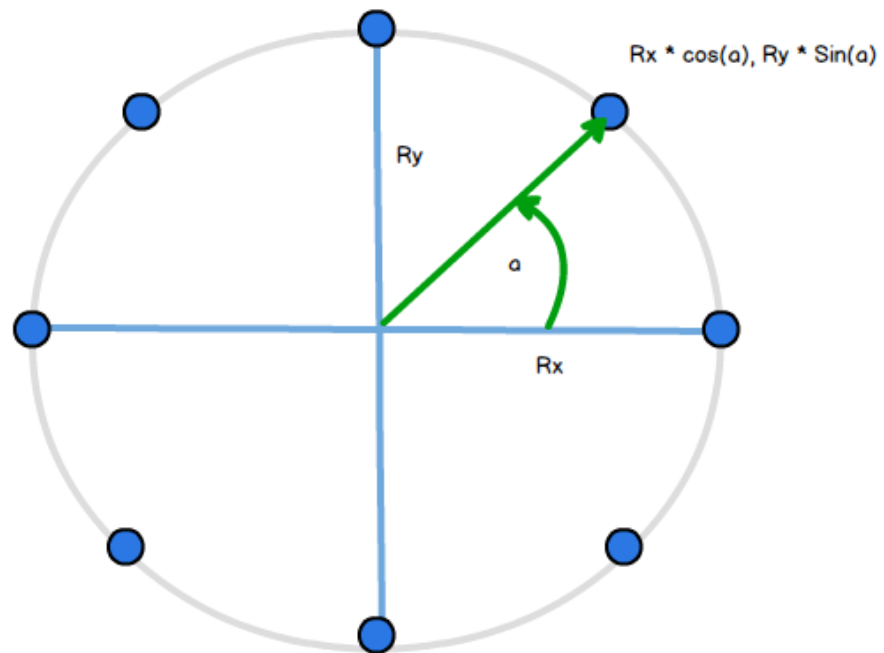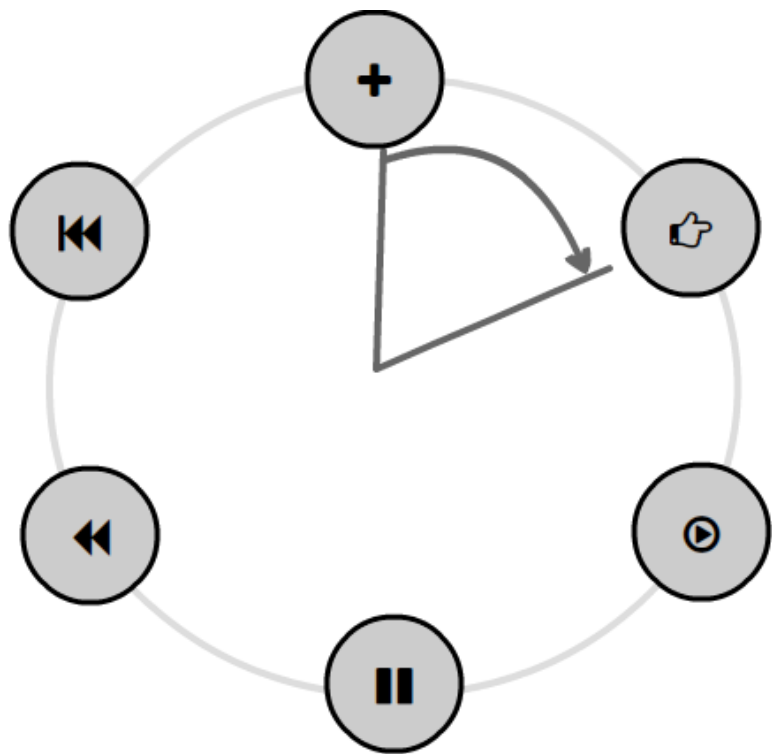

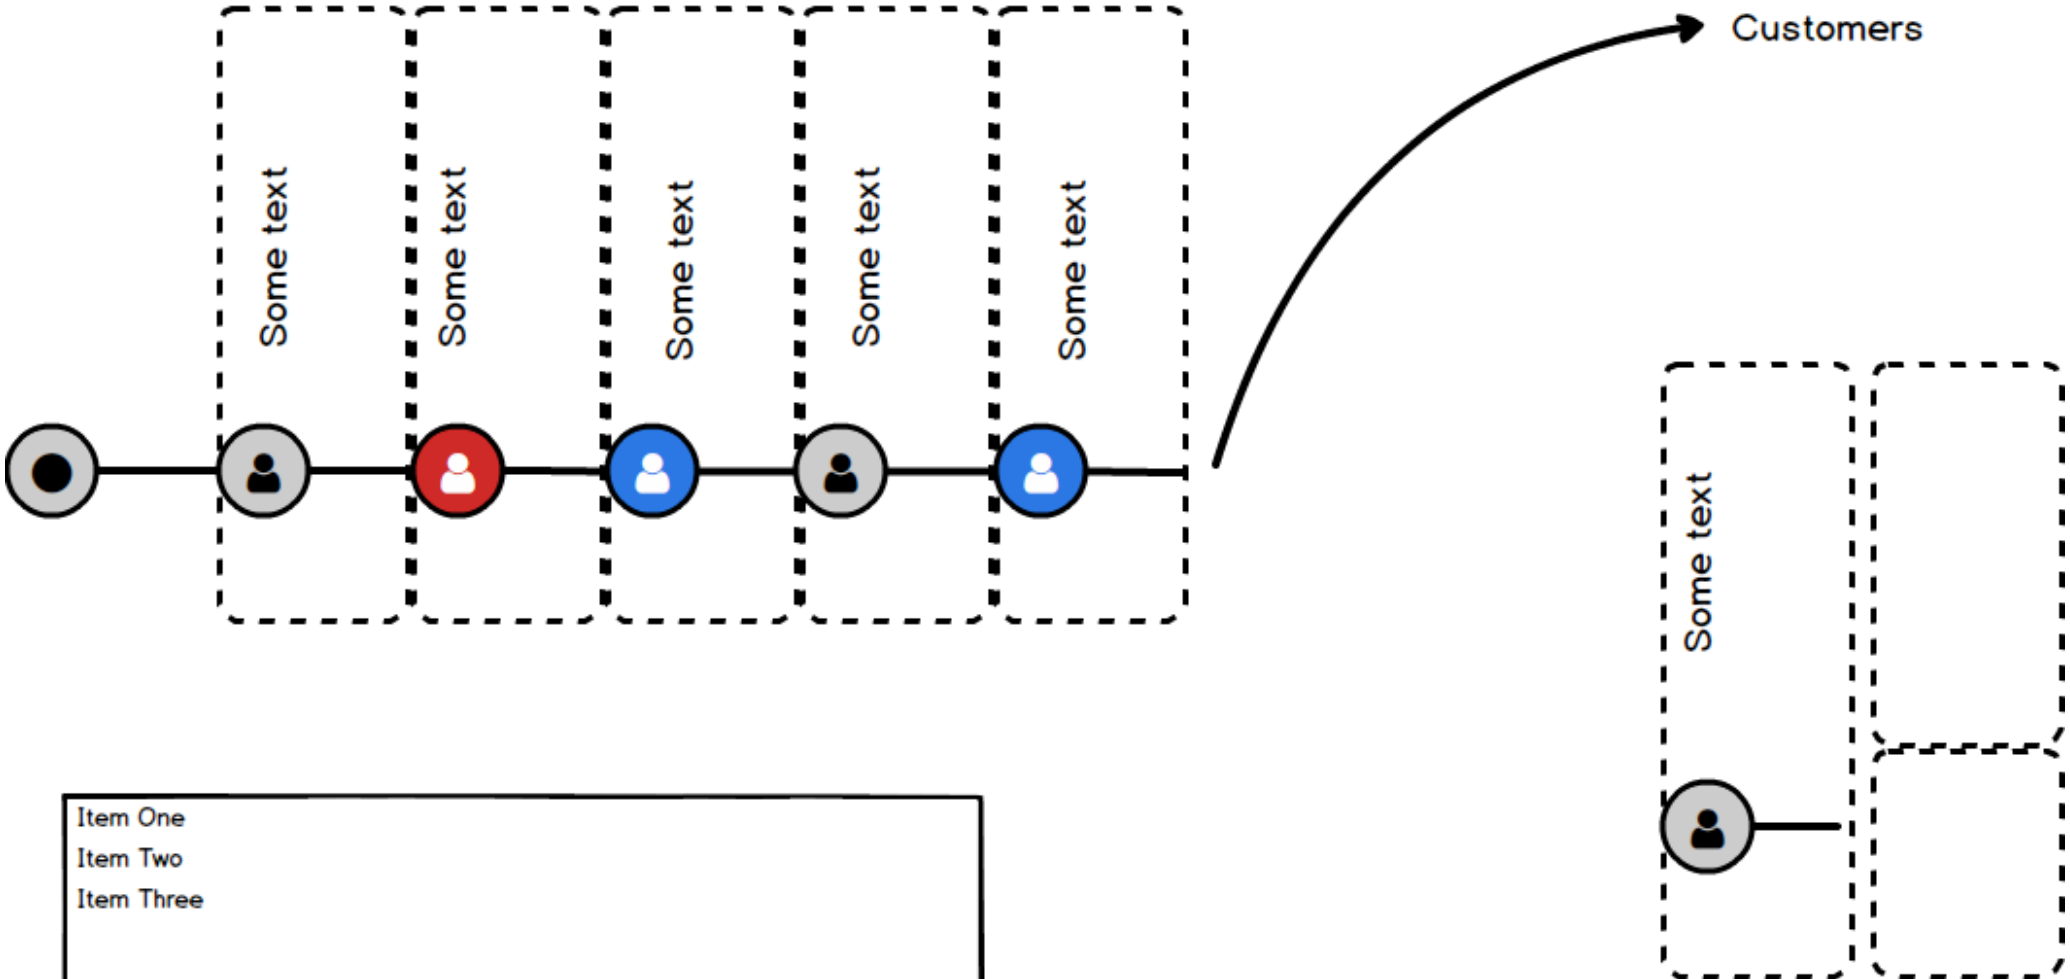

- Item One
- Item Two
- Item Three

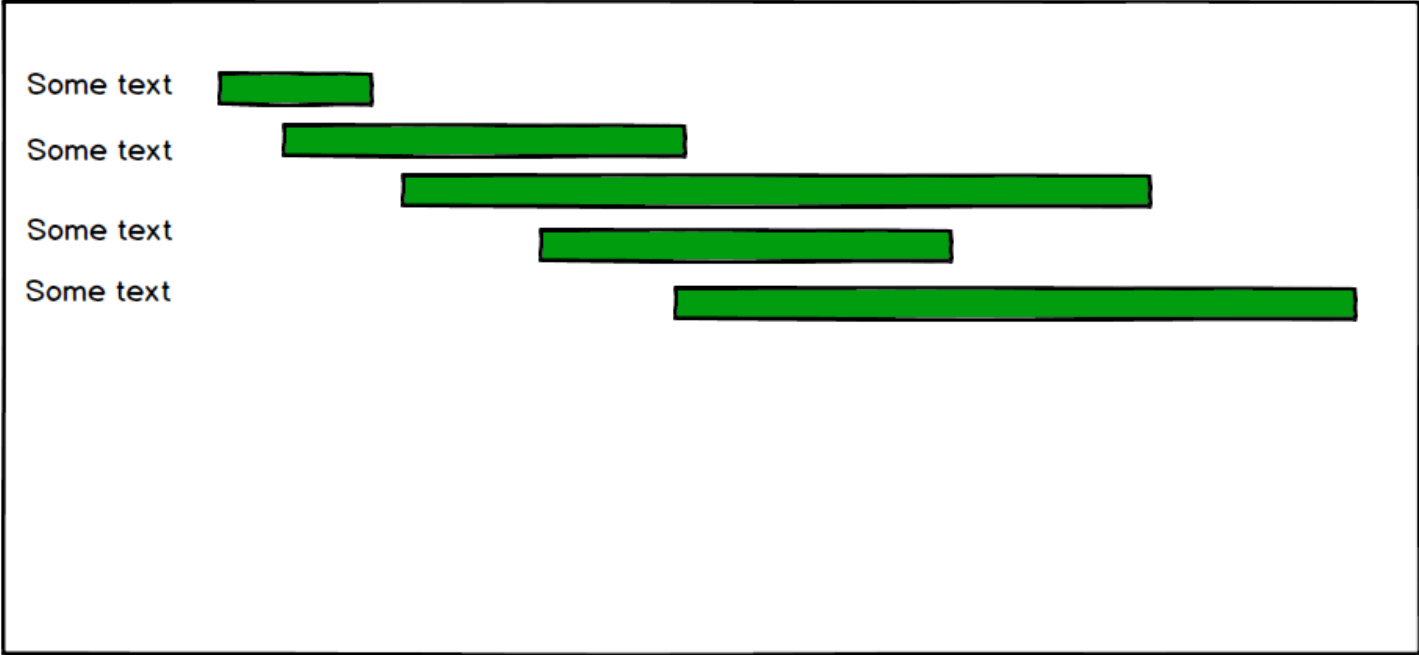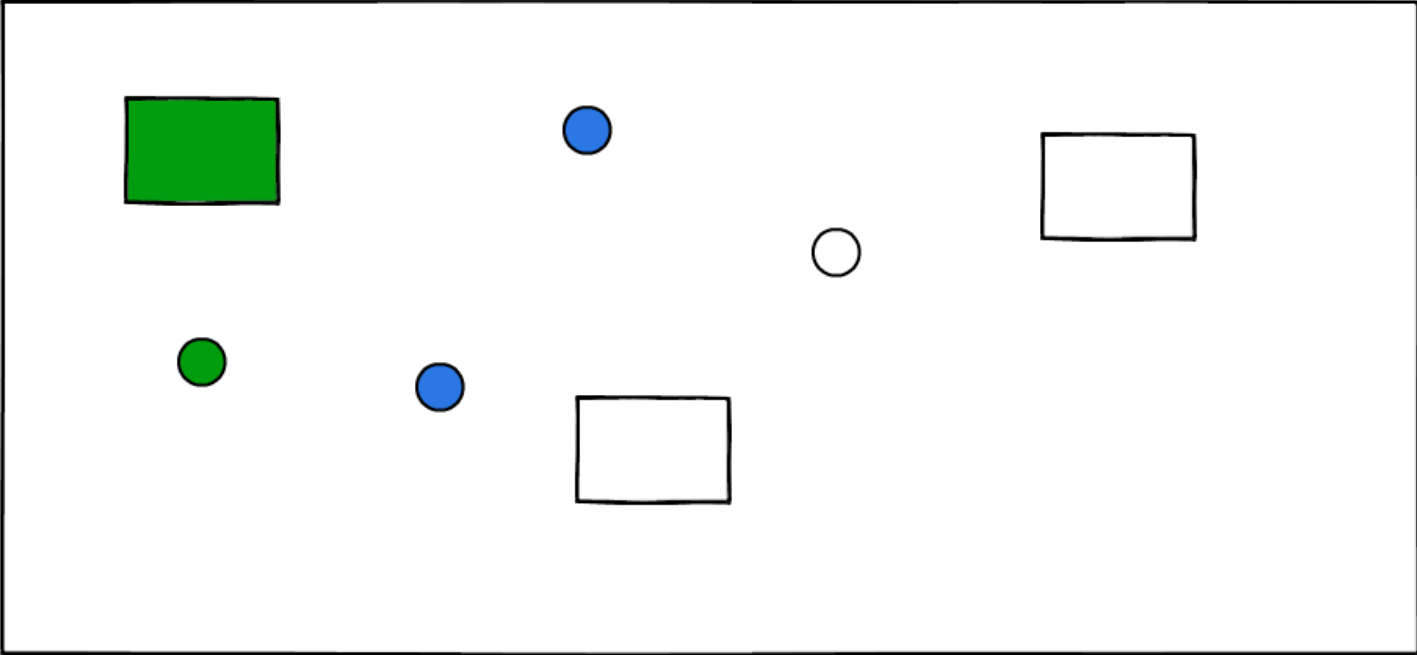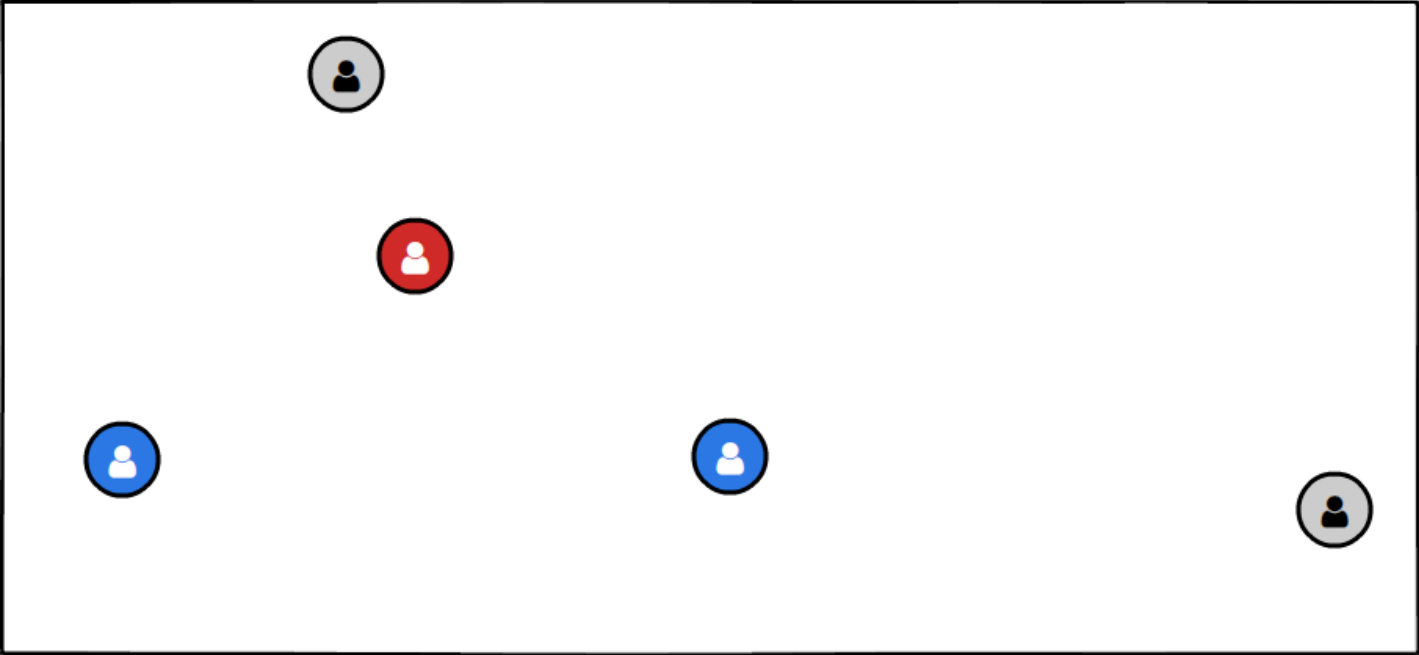



Some text



Some text



Some text




Some text



Header 1

lorem ipsum dolor sit amet, consectetur adipisicing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

A paragraph of **text** with an unassigned link.
A *second row* of ~~text~~ with a web link

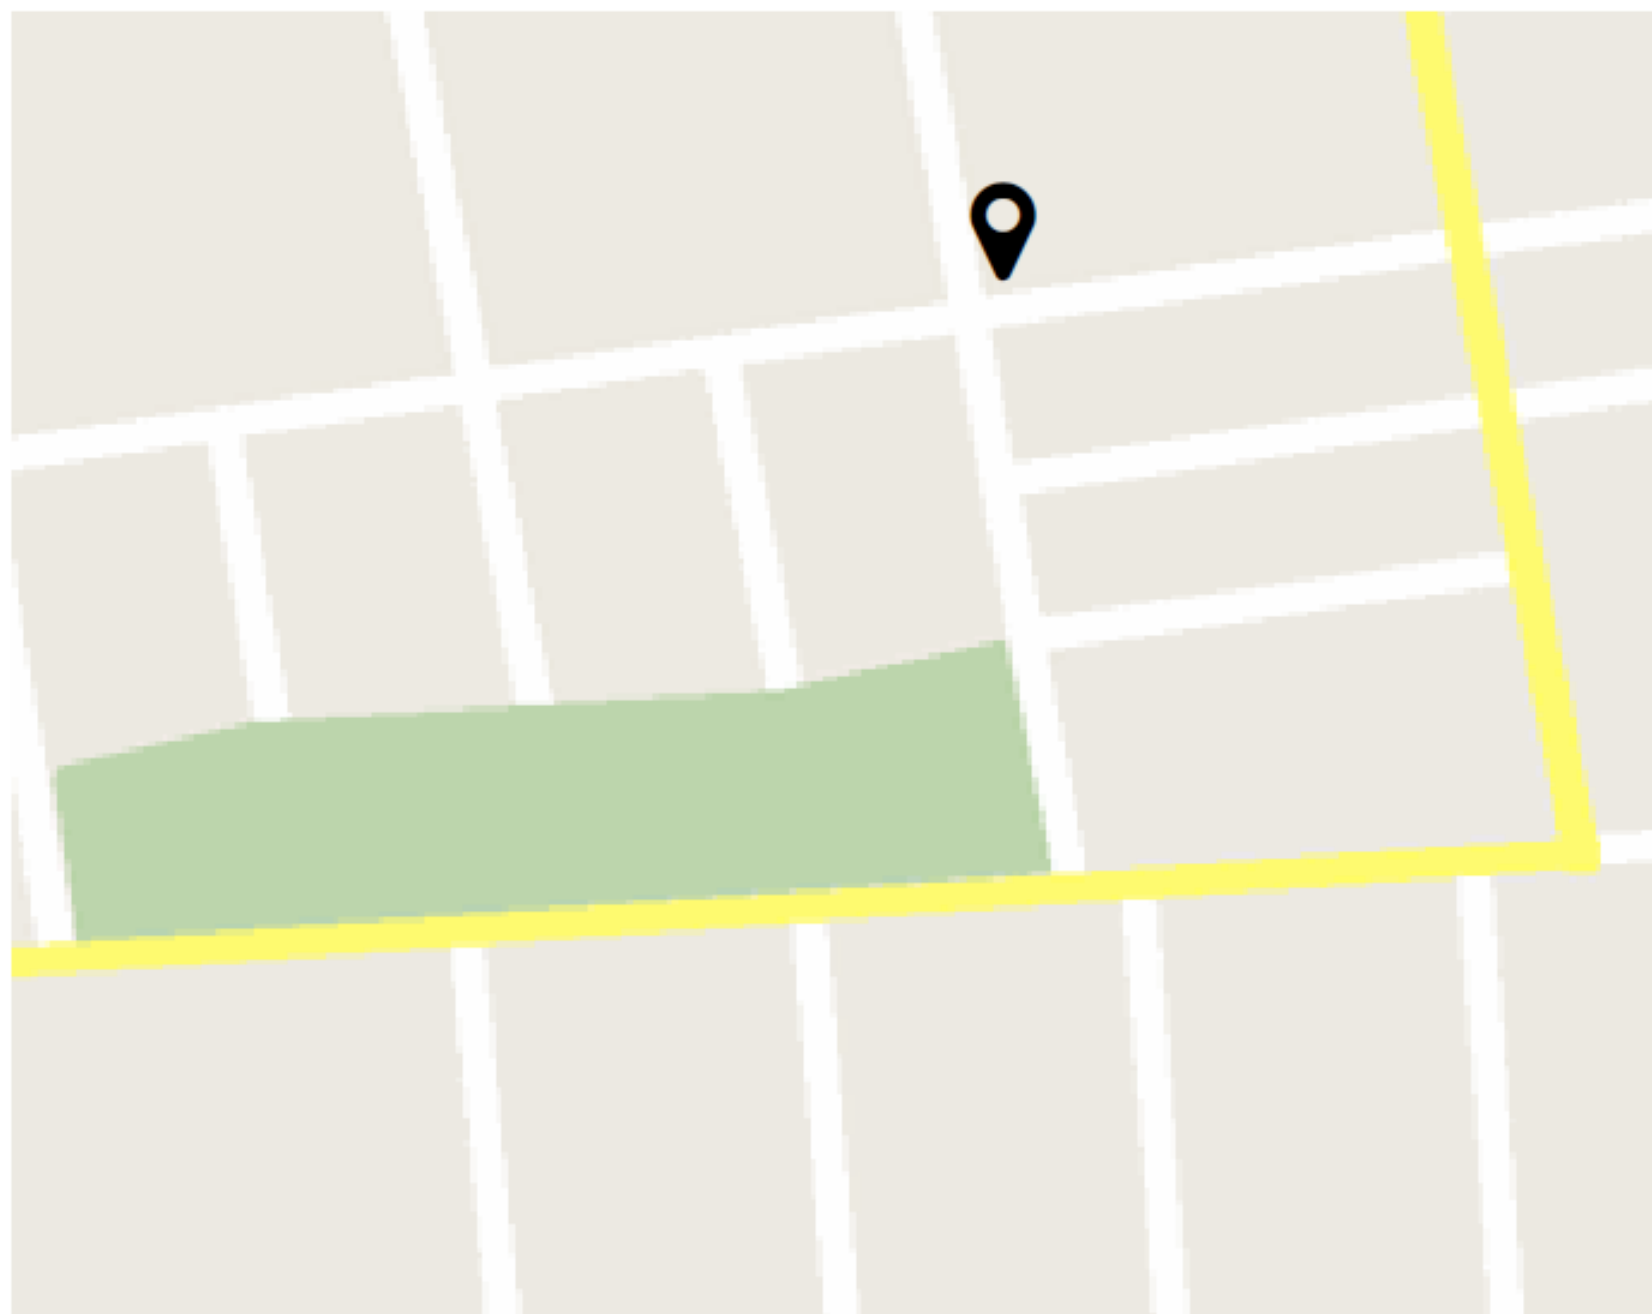



Window Name

Source

Item One

Item Two

Item Three

Target

Item One

Item Three

>

<

Page1 > Subfolder2 > Customer 1

Triggers

Zmiana wyglądu na podstawie właściwości kontrolki lub obiektu

Converters

Zmiana typu

AttachedProperty

Umożliwia dodawanie właściwości do istniejących kontrolerek

MarkupExtensions

Zwracana wartość (obiekt lub EventHandler)

Możemy podpiąć tylko jedno zdarzenie lub jedną właściwość

Behaviors

Dostęp do całego obiektu

Możemy podpiąć wiele zdarzeń i może obsługiwać wiele właściwości

Wymaga biblioteki Microsoft.Xaml.Behaviors.Wpf