


In-Class Exercise/Demo

In-Class Exercise / Demo

Initial Setup



- We will be continuing the demo exercise from day 1: [tutorial-website](#) or [week1-day1](#)
- Download the [images.zip](#) file from GAP (Day 2), unzip it and move it to the [tutorial-website](#) or [week1-day1](#) in the WESTCLIFF folder on your desktop.
- Launch VS Code.
- In VS Code, select [Open folder](#):

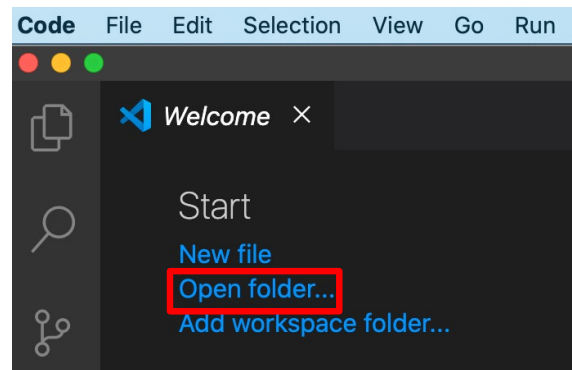


In-Class Exercise / Demo

Initial Setup



- Navigate to select the *tutorial-website* or *week1-day1* folder.
- On the explorer (left side bar), it should look something like this after selecting:


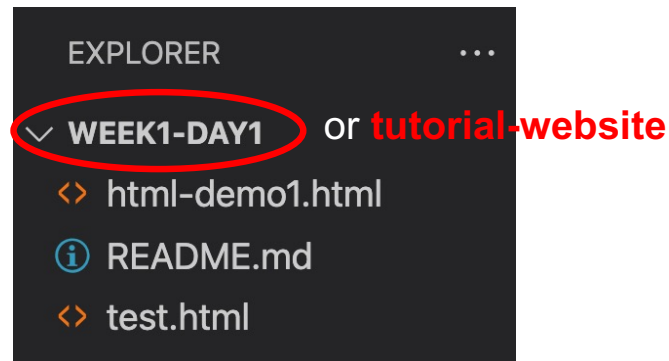


In-Class Exercise / Demo

Initial Changes and Updating



- Let's rename the html page to ***index.html*** – which is the industry standard name for the first page of a website. Most of the time it is also the home page.
- You should always name it ***index*** (all lowercase) instead of some other names like index1, myindex, Index or home because if someone enter <http://yourwebsite.com>, the browser will automatically pull ***index.html***. Naming it something else, one will need to enter <http://yourwebsite.com/myindex.html> or <http://yourwebsite.com/home>.

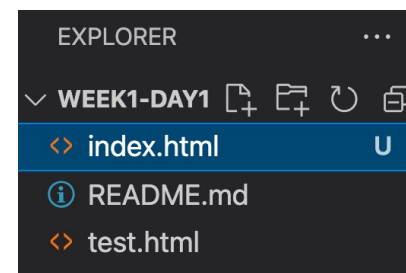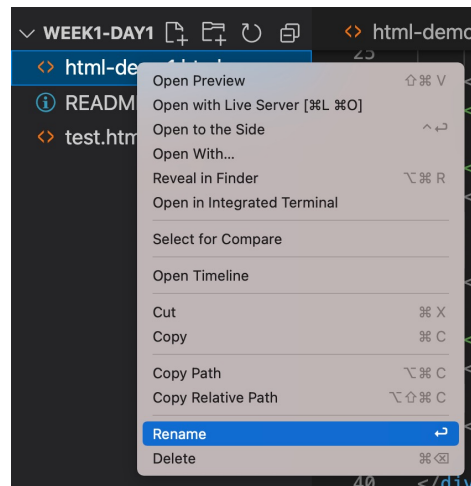

In-Class Exercise / Demo

Initial Changes and Updating



- We will next make an update to our remote github with this small change as a second commit.
- Before we proceed, make sure you have generated an authentication token from your remote Github. If you have not or forgotten, head on to your remote Github to generate one. Follow this link to do this:
<https://docs.github.com/en/github/authenticating-to-github/keeping-your-account-and-data-secure/creating-a-personal-access-token>
Save your token in a document for future reference.
- As mentioned in the previous class, VS Code also has its own integrated terminal within its interface, commonly called bash terminal. To open terminal, either select *Terminal from the top menu* or use keyboard shortcut: **control + `**

In-Class Exercise / Demo

Initial Changes and Updating



- On a new bash terminal, first make sure you are still in *tutorial-website* or *week1-day1*.
- Enter:

```
git commit -m "Second commit"
```

(note: you shouldn't have to **git add** . again because you already did that when you first add this exercise in your local git in the previous class).
- Next, enter:

```
git remote add origin \ (shift + return or enter to move to next line)  
> https://your_username:your_access_token@github.com/your_username/your_git_repo.git
```

** if you get this message: **error: remote origin already exists** Enter this: **git remote remove origin** Then enter this to check if it's removed: **git remote** If it didn't print any message, then it's been removed. Now try step 2 above again.
- Finally enter:

```
git push origin main:refs/heads/main
```

In-Class Exercise / Demo

Initial Changes and Updating



- If successfully pushed, you can head to your remote github repository.
- Refresh the page and you should see the file has been updated along with the message *Second commit.*

 rloke Second commit		
	README.md	Initial commit
	index.html	Second commit
	test.html	First Commit

- After this, return to VS Code.

In-Class Exercise / Demo


Adding Media



- Let's add our first image on the page.
- Open [index.html](#) file, and add the following image element:

```
<main>  
  <h1>My First Heading</h1>  
  <p>My first paragraph.</p>  
    
</main>
```

- Next, we'll preview the page on the browser. Select the command palette:

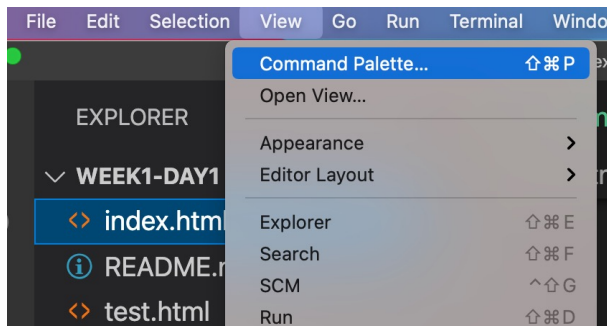

Note:


You may specify just the width without specifying the height. This will let the browser auto calculate the height based on the aspect ratio of the original image.

In-Class Exercise / Demo

Adding Media



- Next on the Command Palette, select **Live Server...**

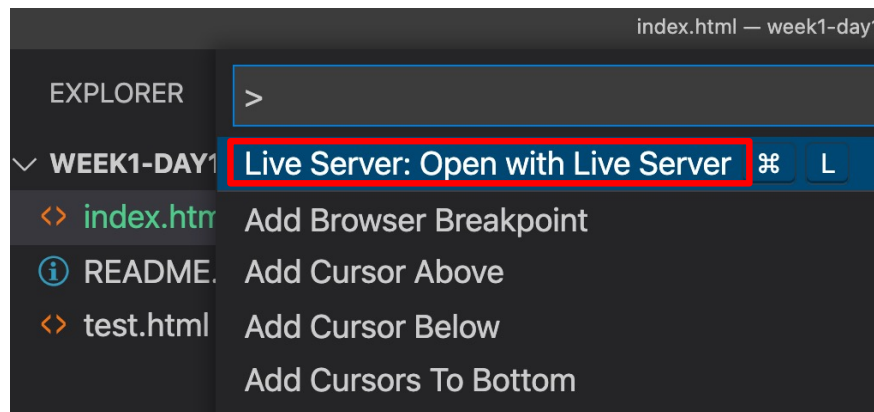

Browser tab opens and this is what the preview should look like ➡

Note: don't close the browser tab after viewing. Leave it open. It will automatically updates whenever we add more codes and contents on the file.

My Web Site Brand

- Home
- About
- Gallery
- Contact

My First Heading

My first paragraph.




© Copyright 2020

In-Class Exercise / Demo


Creating a Second HTML Page



- Next, we will add a new html file. In VS Code, choose one of the following methods to create a new file:

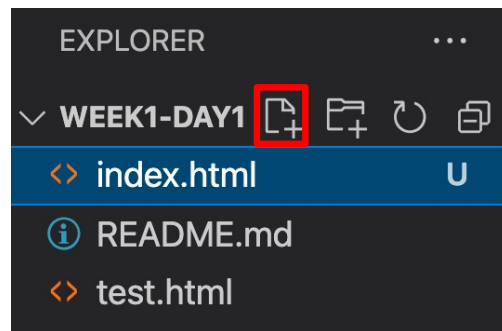

OR

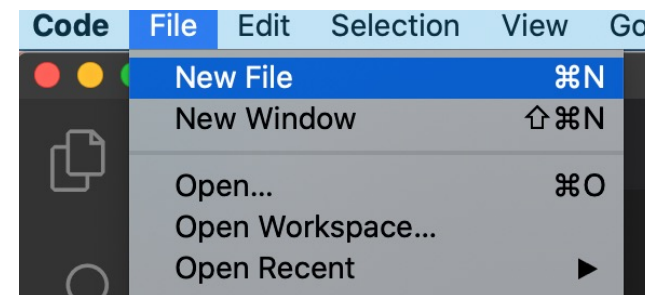


In-Class Exercise / Demo

Creating a Second HTML Page



- Next, save this file as **page2.html**. Save this in to the *week1-day1* folder.

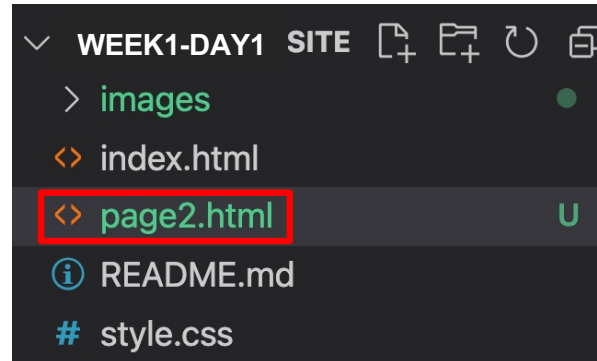

- Open **index.html**. Copy all the codes on this page and paste on to **page2.html**. Save the updated file.

In-Class Exercise / Demo

Creating a Second HTML Page



- First, change the title of the page:

```
<head>  
<title>My Second Web Page</title>  
</head>
```

- Next, change the heading, paragraph texts and also remove the image element:

```
<main>  
  <h1>My Second Heading</h1>  
  <p>My Second paragraph.</p>  
    
</main>
```

In-Class Exercise / Demo

Adding Table



- Let's add a HTML table on to this new page. We'll start with the basic table structure with the following markup:

```
<main>
  <h1>My Second Heading</h1>
  <p>My Second paragraph.</p>
  

  <table>
    <caption></caption>
    <thead></thead>
    <tbody></tbody>
    <tfoot></tfoot>
  </table>
</main>
```

In-Class Exercise / Demo

Adding Table



1. Next, we'll split the table heading into 5 columns:

```
<table>
<caption></caption>
<thead>
  <tr>
    <th></th>
    <th></th>
    <th></th>
    <th></th>
    <th></th>
  </tr>
</thead>
<tbody></tbody>
<tfoot></tfoot>
</table>
```

2. And then add content in them:

```
<table>
<caption>Calories Comparison of Popular Burgers</caption>
<thead>
  <tr>
    <th>Type</th>
    <th>Big Mac</th>
    <th>Whopper</th>
    <th>Dave's Double</th>
    <th>Whataburger</th>
  </tr>
</thead>
```

In-Class Exercise / Demo

Adding Table



1. Next, we'll split the table body into 2 rows with 5 columns each:

```
<tbody>
  <tr>
    <td></td>
    <td></td>
    <td></td>
    <td></td>
    <td></td>
  </tr>
  <tr>
    <td></td>
    <td></td>
    <td></td>
    <td></td>
    <td></td>
  </tr>
</tbody>
```

2. And then add content in them:

```
<tbody>
  <tr>
    <td>Calories</td>
    <td>563</td>
    <td>677</td>
    <td>870</td>
    <td>590</td>
  </tr>
  <tr>
    <td>Fat</td>
    <td>30gm</td>
    <td>40gm</td>
    <td>51gm</td>
    <td>25gm</td>
  </tr>
</tbody>
```

In-Class Exercise / Demo

Adding Table



- Return to the browser tab and see the preview changes. The table should now look something like this:

Calories Comparison of Popular Burgers				
Type	Big Mac	Whopper	Dave's Double	Whataburger
Calories	563	677	870	590
Fat	30gm	40gm	51gm	25gm

© Copyright 2020

Note that by default, there are no outlines within the table, table rows and columns.

In-Class Exercise / Demo

Adding Table



1. Next, we'll split the table footer into 5 columns as well:

```
<tfoot>
  <tr>
    <td></td>
    <td></td>
    <td></td>
    <td></td>
    <td></td>
  </tr>
</tfoot>
```

2. And then add content in them:

```
<tfoot>
  <tr>
    <td>Vendor</td>
    <td>MacD</td>
    <td>Burger King</td>
    <td>Wendys</td>
    <td>Whataburger</td>
  </tr>
</tfoot>
```

In-Class Exercise / Demo

Adding Table



- Return to the browser tab and see the preview changes. The table should now look something like this:

Calories Comparison of Popular Burgers				
Type	Big Mac	Whopper	Dave's Double	Whataburger
Calories	563	677	870	590
Fat	30gm	40gm	51gm	25gm
Vendor	MacD	Burger King	Wendys	Whataburger

© Copyright 2020

Note that by default, there are no outlines within the table, table rows and columns.

In-Class Exercise / Demo

Adding Table



- To see the table a little better, for the purpose of this demo we will add this HTML attribute `border` to the open table tag `<table>` to switch on the outline or border of the table. This attribute and many other table attributes are deprecated so don't use them. As mentioned, we are only using here for this demo. You will learn a better method to format and style the table in Week 2.
- Add the border attribute with a value of 1 to the open table tag:

```
<table border="1">  
<caption>Calories Comparison of Popular Burgers</caption>  
<thead>
```

In-Class Exercise / Demo

Adding Table



- Return to the browser tab and see the preview changes. The table should now look something like this:

Calories Comparison of Popular Burgers

Type	Big Mac	Whopper	Dave's Double	Whataburger
Calories	563	677	870	590
Fat	30gm	40gm	51gm	25gm
Vendor	MacD	Burger King	Wendys	Whataburger



Note: we will not worry about making the table look pretty for now.

In-Class Exercise / Demo

Creating a Third HTML Page



- Next, we'll create a third HTML page by duplicating [html-demo2b.html](#):

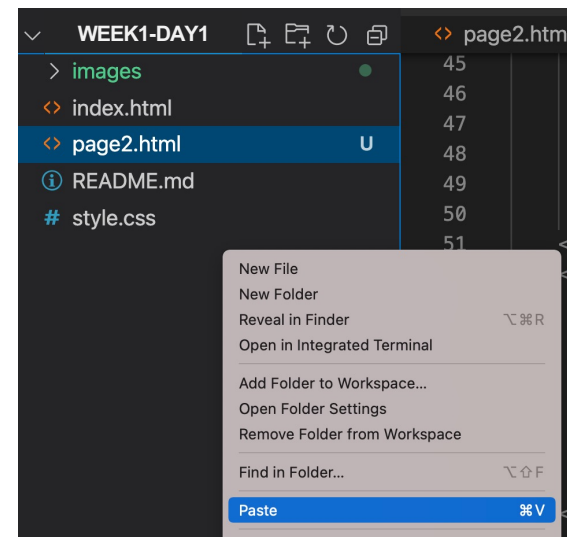
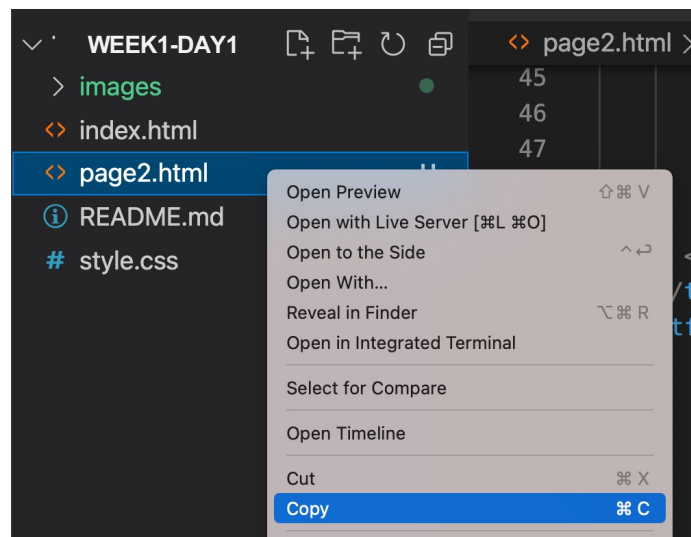


In-Class Exercise / Demo

Creating a Third HTML Page



- Rename this new file as *html-demo2c.html*:

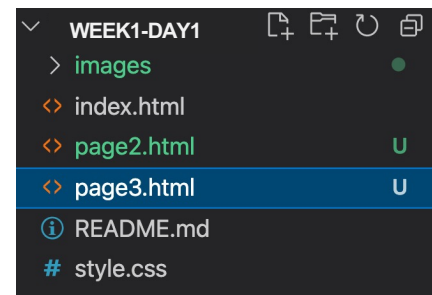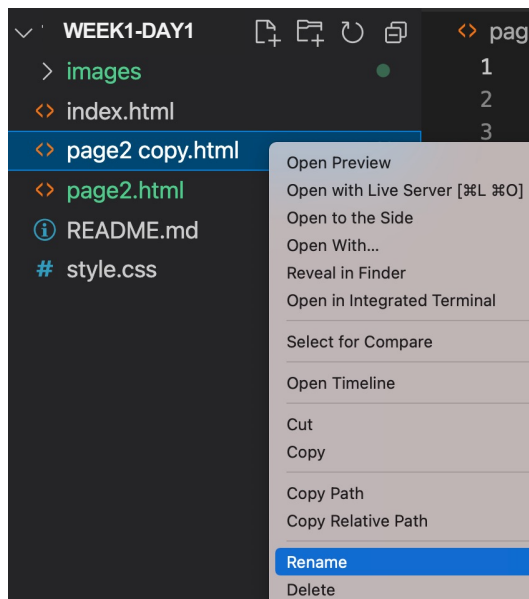

In-Class Exercise / Demo

Creating a Third HTML Page



- Next, let's change the title of the page:

```
<head>  
<title>My Third Web Page</title>  
</head>
```

- And also the heading, paragraph texts and remove the entire table codes:

```
<main>  
  <h1>My Third Heading</h1>  
  <p>My Third paragraph.</p>  
    
</main>
```

In-Class Exercise / Demo

Adding a Form



- Let's add a HTML form on to this new page.
- We will create a simple signup form on the page that will consist of a few text fields, radio buttons, a select menu, a comment text box and finally a button for submitting.
- We will create this form below the table. Let's start with the main form element **<form>** along with the two main attributes - *action* and *method*:

```
<main>
  <h1>My Third Heading</h1>
  <p>My Third paragraph.</p>
  

  <form action="/signup" method="post">
  </form>
</main>
```


In-Class Exercise / Demo

Adding a Form



- Next, add a fieldset element (to create an enclose border, though this is actually optional).
- Within this fieldset, we'll also create a legend element – this creates a nice needed title for the form.

```
<form action="/signup" method="post">
<fieldset>
  <legend>User personal information</legend>
</fieldset>
</form>
```

On the browser, the preview of the page should look like this ➡

User personal information

© Copyright 2020

In-Class Exercise / Demo

Adding a Form



- Below the form title, we will create 3 single line text fields - name, email and phone. Each text field will have their respective text label as well.
- We'll also add a line break `<br>` between each field to force each text field below its label. Otherwise, they will display next to the text label, which is fine as well.

```
<form action="/signup" method="post">
<fieldset>
  <legend>User personal information</legend>
  <label>Enter your full name</label><br>
  <input type="text" name="name"><br>
  <label>Enter your email</label><br>
  <input type="email" name="email"><br>
  <label>Enter your phone</label><br>
  <input type="text" name="phone"><br>
</fieldset>
</form>
```

On the browser, the form should now look like this:

User personal information

Enter your full name

Enter your email

Enter your phone

© Copyright 2020

In-Class Exercise / Demo

Adding a Form



- We'll next add a pair of radio buttons. We will use these for selection of gender.
- We'll also add two line breaks `<br>` - one before and one after the label to create additional spacing between the previous phone input text and this.

```
<fieldset>
  <legend>User personal information</legend>
  <label>Enter your full name</label><br>
  <input type="text" name="name"><br>
  <label>Enter your email</label><br>
  <input type="email" name="email"><br>
  <label>Enter your phone</label><br>
  <input type="text" name="phone"><br>
  <br><label>Select your gender</label><br>
  <input type="radio" name="gender" value="male"/>Male
  <input type="radio" name="gender" value="female"/>Female <br/>
</fieldset>
```

On the browser, the form should
now look like this ➡

User personal information

Enter your full name

Enter your email

Enter your phone

Select your gender
☐ Male ☐ Female

© Copyright 2020

In-Class Exercise / Demo

Adding a Form



- Next up: select menu. We will use these for selection of ways to contact.
- We'll also add two line breaks `<br>` - one before and one after the label to create additional spacing between the radio buttons and this.

```
<br><label>Select your gender</label><br>
<input type="radio" name="gender" value="male"/>Male
<input type="radio" name="gender" value="female"/>Female <br/>
<br><label>How should we contact you?</label><br>
<select>
  <option>Email</option>
  <option>Phone</option>
</select><br>
```

```
</fieldset>
```

On the browser, the form should now look like this ➡

User personal information

Enter your full name

Enter your email

Enter your phone

Select your gender
☐ Male ☐ Female

How should we contact you?

© Copyright 2020

In-Class Exercise / Demo

Adding a Form



- The final part is adding a multiline text box using the `<textarea>` element. We are also adding two attributes to this text box - `rows` and `cols` to expand the height and width respectively. And finally, a button to sign up.

```
<select>
  <option>Email</option>
  <option>Phone</option>
</select><br>
<br>Tell us the reason of your visit today:<br>
<textarea rows="5" cols="30"></textarea><br>
<input type="submit" value="sign-up">
</fieldset>
</form>
```

number of
lines

number of
characters

On the browser, the form should
now look like this ➡

© Copyright 2020

In-Class Exercise / Demo

Linking Pages



- Now that we have 3 HTML pages created, it's time to link them together so users can navigate between these pages.
- We'll start with *html-demo2.html*. Add the following hypertext link `<a>` codes in the navigation menu:

```
<nav>
  <ul>
    <li><a href="html-demo2.html">Home</a></li>
    <li><a href="html-demo2b.html">About</a></li>
    <li>Gallery</li>
    <li><a href="html-demo2c.html">Contact</a></li>
  </ul>
</nav>
```

My Web Site Brand

- [Home](#)
- [About](#)
- Gallery
- [Contact](#)

My First Heading

In-Class Exercise / Demo

Exercise & Submission



- **Exercise:**

- Can you do the same for the other two pages – [page2.html](#) and [page3.html](#)? That is, create hypertext links in the navigation menu.
- When finished, preview one of the pages on the browser.
- You can now navigate between these three pages.
- Commit (message: *Added 2 html pages*) and push to the *tutorial-website* or *week1-day1* Github repository.

- **Submit:**

- Post Github URL on **GAP Week 1 Day 2 Exercise** by 10.30PM PT