

In-Class Exercise/Demo



In-Class Exercise/Demo

- Continuing the demo exercise from week 1 day 2: **week1-day1**.
- Launch VS Code.
- Navigate to open this folder within.
- Don't forget to commit and push to github while coding.



In-Class Exercise/Demo

- Open **index.html**.
- We will begin our CSS demo using the *embed* or *internal* method ie. codes written and grouped within the <head> element area.
- The first step is adding the <style> element:

```
<head>  
<title>My First Web Page</title>  
<!-- Embed Style Method -->  
<style>  
  
</style>  
</head>
```



In-Class Exercise/Demo

- Our first styling is creating a *background image for the <header> area of the page. By default all html elements have:

- no background (basically transparent)
- width of 100% (span across the page)
- no height (height is based on amount of content in it)

* css background image vs html :

1. css background image allows other content display over it whereas html do not.
2. css background image as decorative content whereas html to support text content.

```
<!-- Embed Style Method -->
```

```
<style>
```

```
  header {  
    background: url(images/central_park.jpg); /* place image as background */  
    height: 400px; /* give header some height to display the background image */  
  }
```

```
</style>
```

Note:


header is the selector

background, height are CSS properties



In-Class Exercise/Demo

- Preview the page on the browser
 - Click **Go Live** at the bottom of the window
 - or
 - **view => command palette => Live Server**

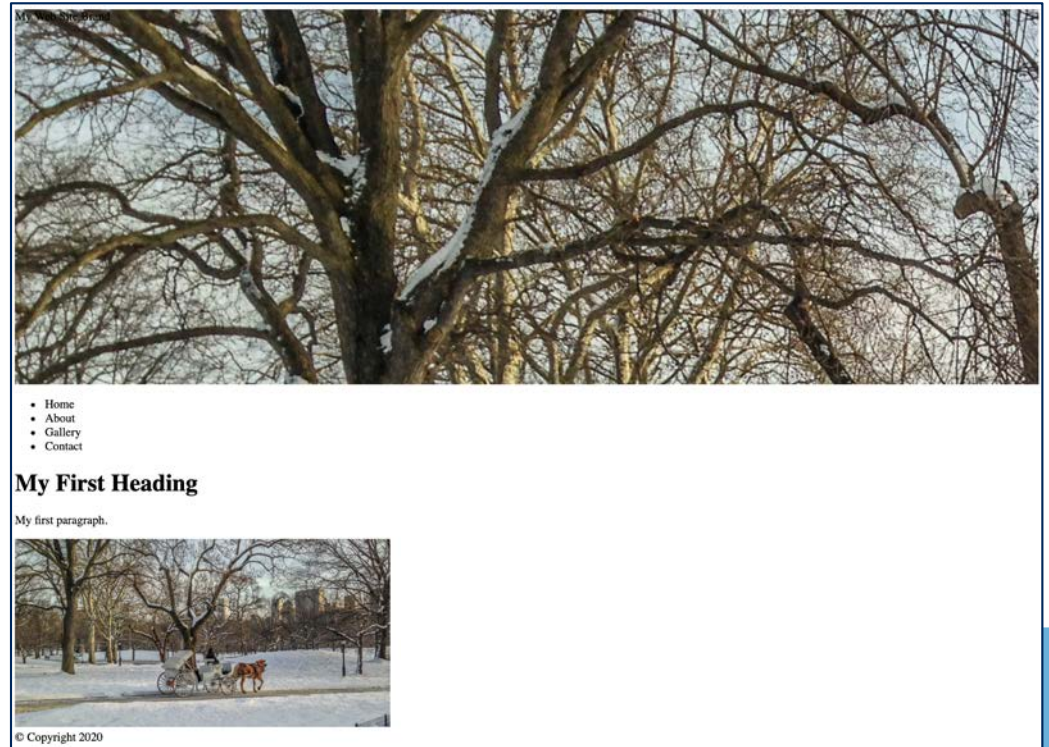



In-Class Exercise/Demo

- The reason the background image display only a fraction of it is because it has a large dimension 3264px by 1635px. But that can be controlled using CSS properties: background-size and background-position.


```
<!-- Embed Style Method -->
<style>
  header {
    background: url(images/central_park.jpg) 0 -200px; /* place image as background */
    background-size: 1500px;
    /*background-position: 0 -200px;*/
    height: 400px; /* give header some height to display the background image */
  }
</style>
```

they are the same – combined
into the background property
0 = horizontal, -200px = vertical



In-Class Exercise/Demo


- Preview the page on the browser:

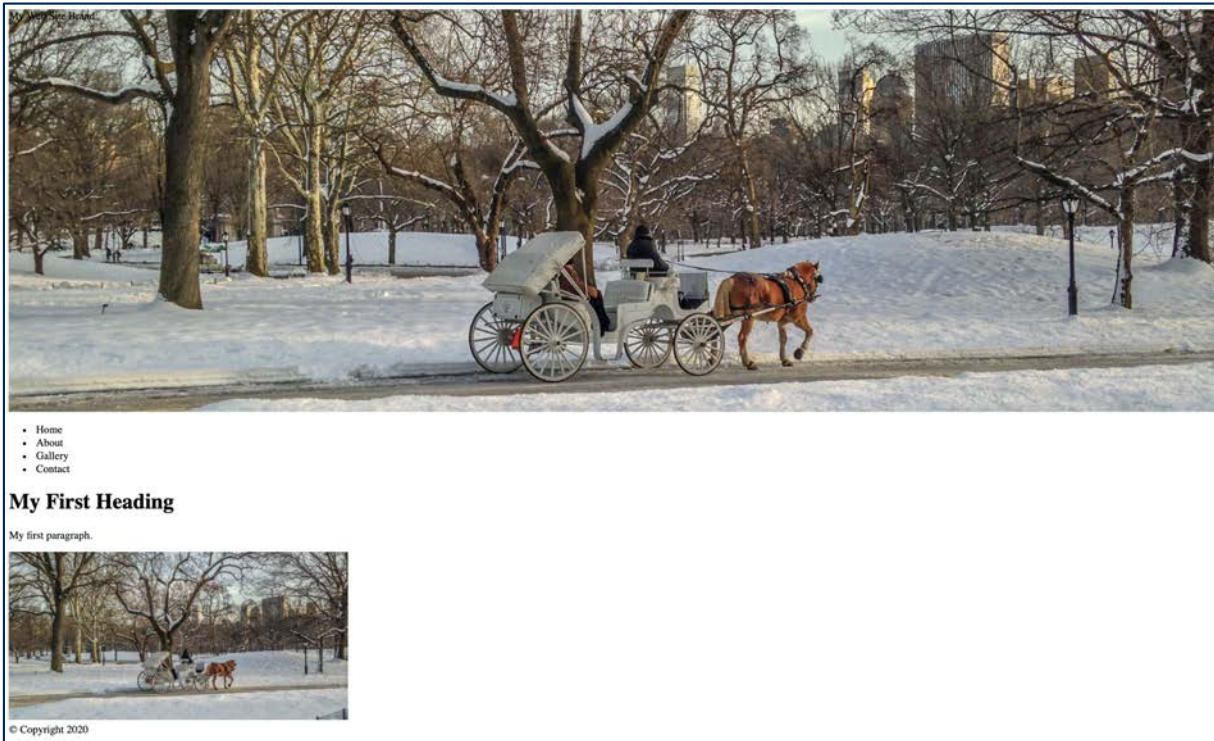



In-Class Exercise/Demo

- If the width of browser window is reduce, you'll notice the image is actually repeating. Background images will tile horizontally and vertically by default.

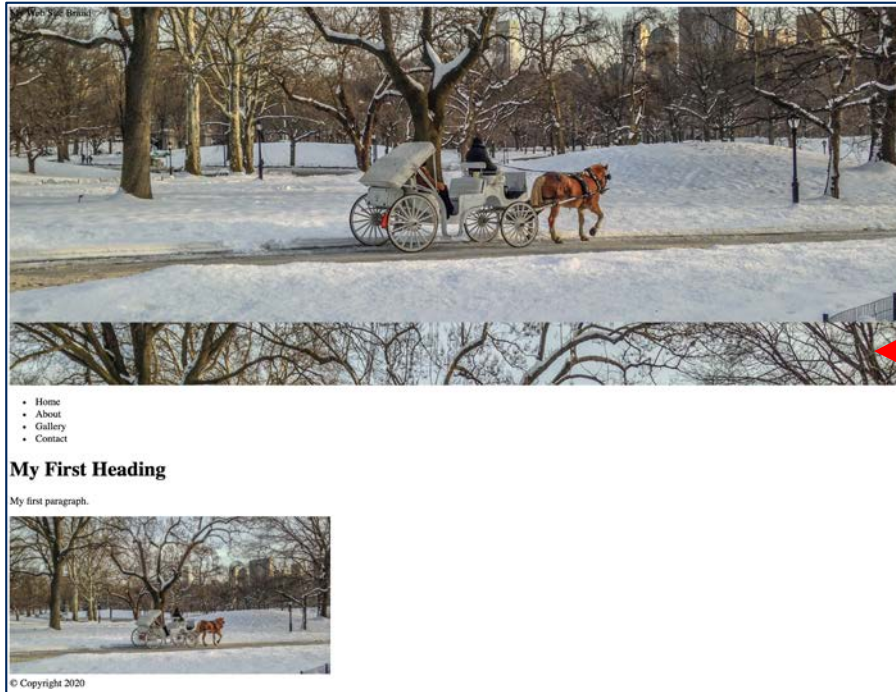

tile background



In-Class Exercise/Demo

- To solve this, use the background-repeat property using the *no-repeat* value. You can also combine with the background property if you wish:

```
<!-- Embed Style Method -->
<style>
  header {
    background: url(images/central_park.jpg) 0 -200px no-repeat; /* place image as background */
    background-size: 1500px;
    /*background-position: 0 -200px;*/
    /*background-repeat: no-repeat;*/
    height: 400px; /* give header some height to display the background image */
  }
</style>
```

- Preview on the browser after this.

they are the same – combined
into the background property





In-Class Exercise/Demo

- Now that we have switched to using the image as background, we can now remove the `<img>` element in the main area:

```
<main>
  <h1>My First Heading</h1>
  <p>My first paragraph.</p>
  
</main>
```



- If you preview on the browser again, the image below *My First Paragraph* is now gone.
- Commit (message: css commit 1) and push to Github.



In-Class Exercise/Demo

- Next we'll make the site name stand out. Currently it is appearing at the very top left corner of the header box where the background image is. It's hard to see because it's colored black.
- To make it stand out, we'll target the header as the CSS selector again and size it up using the font-size property and change the font color using the color property.
- As an example, this time we will use the *inline* method of writing the CSS codes:

```
<div id="container">
```

```
<header style="font-size: 60px; color: #fff;">My Web Site Brand</header>
```

You can write color hexcodes in 3 characters only if they are in pairs.
Example: ff99bb (f9b) or ffffff (fff).



In-Class Exercise/Demo

- When preview on the browser:





In-Class Exercise/Demo

- Next, we'll push the site name a little down and to the right within the header box by using the *padding* property. We will also make the text bolder (*font-weight*) and also change the font to an arial (*font-family*). However, we'll return to the *embed* method as the *inline* method is only for demonstration purposes and should be avoided if possible.

```
<!-- Embed Style Method -->
<style>
  header {
    background: url(images/central_park.jpg) 0 -200px no-repeat; /* place image as background */
    background-size: 1500px;
    /*background-position: 0 -200px;*/
    /*background-repeat: no-repeat;*/
    height: 400px; /* give header some height to display the background image */
    padding-top: 100px;
    padding-left: 100px;
    font-weight: bold;
    font-family: Arial, Helvetica, sans-serif;
  }
</style>
```




In-Class Exercise/Demo

- When preview on the browser:





In-Class Exercise/Demo

- Returning to CSS – styling the navigation. Currently they are in a bullet list format.
- We will first remove the bullets (*list-style-type*), follow by converting them to appear horizontal instead of the current vertical appearance (*display*). We'll target the **li** element as the selector:

```
<nav>
  <ul>
    <li><a href="css-demo1.html">Home</a></li>
    <li><a href="css-demo1b.html">About</a></li>
    <li>Gallery</li>
    <li><a href="css-demo1c.html">Contact</a></li>
  </ul>
</nav>
```

• [Home](#)
• [About](#)
• Gallery
• [Contact](#)

```
<!-- Embed Style Method -->
<style>
  header {
    background: url(images/central_park
    background-size: 1500px;
    /*background-position: 0 -200px;*/
    /*background-repeat: no-repeat;*/
    height: 400px; /* give header some
    padding-top: 100px;
    padding-left: 100px;
    font-weight: bold;
    font-family: Arial, Helvetica, sans
  }
  li {
    list-style-type: none;
    display: inline;
  }
</style>
```


[Home](#) [About](#) [Gallery](#) [Contact](#)



In-Class Exercise/Demo

- Next let's style the hypertext links – first, we'll add some spacing between each link label (*padding*) and secondly, modify the hypertext links– removing the default underline and style all 4 user events: **link**, **visited**, **hover**, **active**. Note: if style all 4 events, it must be in that order or they won't work.

```
li {  
  list-style-type: none;  
  display: inline;  
  padding: 0 20px;  
}  
li a {  
  text-decoration: none; /* Remove Underline */  
}  
li a:link {  
  color: #000; /* Before Click */  
}  
li a:visited {  
  color: #818db3; /* After Click */  
}  
li a:hover {  
  color: #333; /* Mouse Over */  
}  
li a:active {  
  color: #753a30; /* Mouse Down */  
}
```

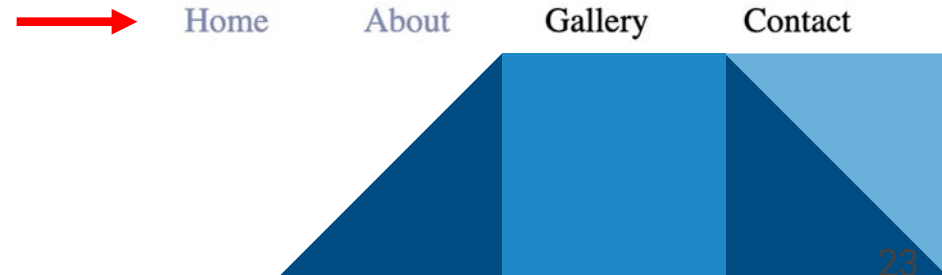



In-Class Exercise/Demo

- A little more adjustment to the navigation – apply a background color to the navigation box (*background-color*), center align the labels (*text-align*) and adjust the vertical position (*padding-top*) within the navigation box.


```
li a:active {  
    color:#753a30; /* Mouse Down */  
}  
nav {  
    background-color:rgb(255, 245, 238);  
    height: 50px;  
    text-align: center;  
    padding-top: 2px;  
}
```

Instead of color hex codes,
you can also use rgb color.



In-Class Exercise/Demo

- When preview on the browser:

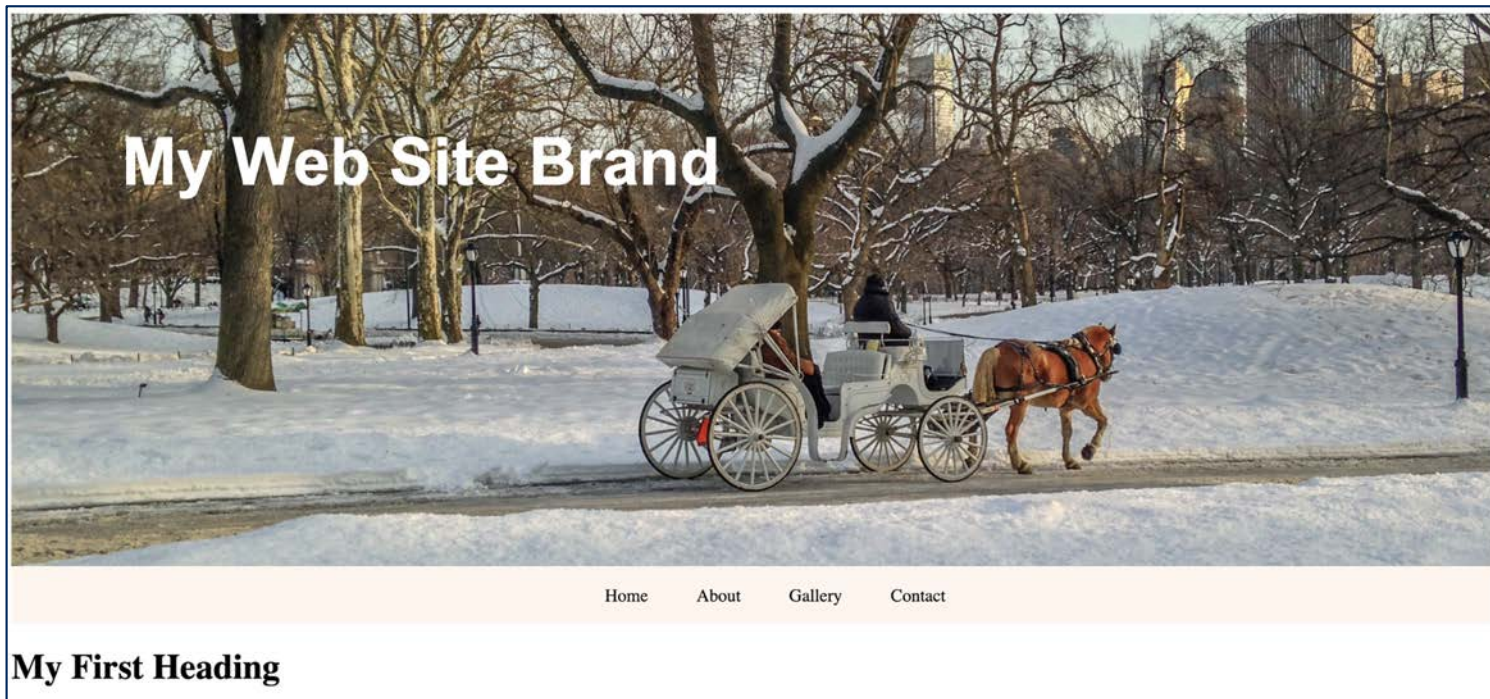

Commit (message:
css commit 2) and
push to Github



In-Class Exercise/Demo

- The next area we'll style is the main area which contains a heading `<h1>` and a paragraph `<p>`. We will give the heading a new color (*color*) and font (*font-family*). Also we'll extend the height of the main area (in reality, you should try not give this element a fixed height but let it extend organically based on the amount of content in it).


```
nav {  
  background-color:rgb(255, 245, 238);  
  height: 50px;  
  text-align: center;  
  padding-top: 2px;  
}  
main {  
  height: 400px; /* give some height to get a better sense of how the page could look like */  
}  
main h1 {  
  color:rgb(129, 141, 179);  
  font-family: arial;  
}  
</style>
```

Refer to as contextual selector (parent-child) where main is the parent and h1 is the child of main and the target. Contextual selectors are more selective – meaning only h1 found within main area will be styled. All other h1 will not be styled.



In-Class Exercise/Demo

- When preview on the browser:

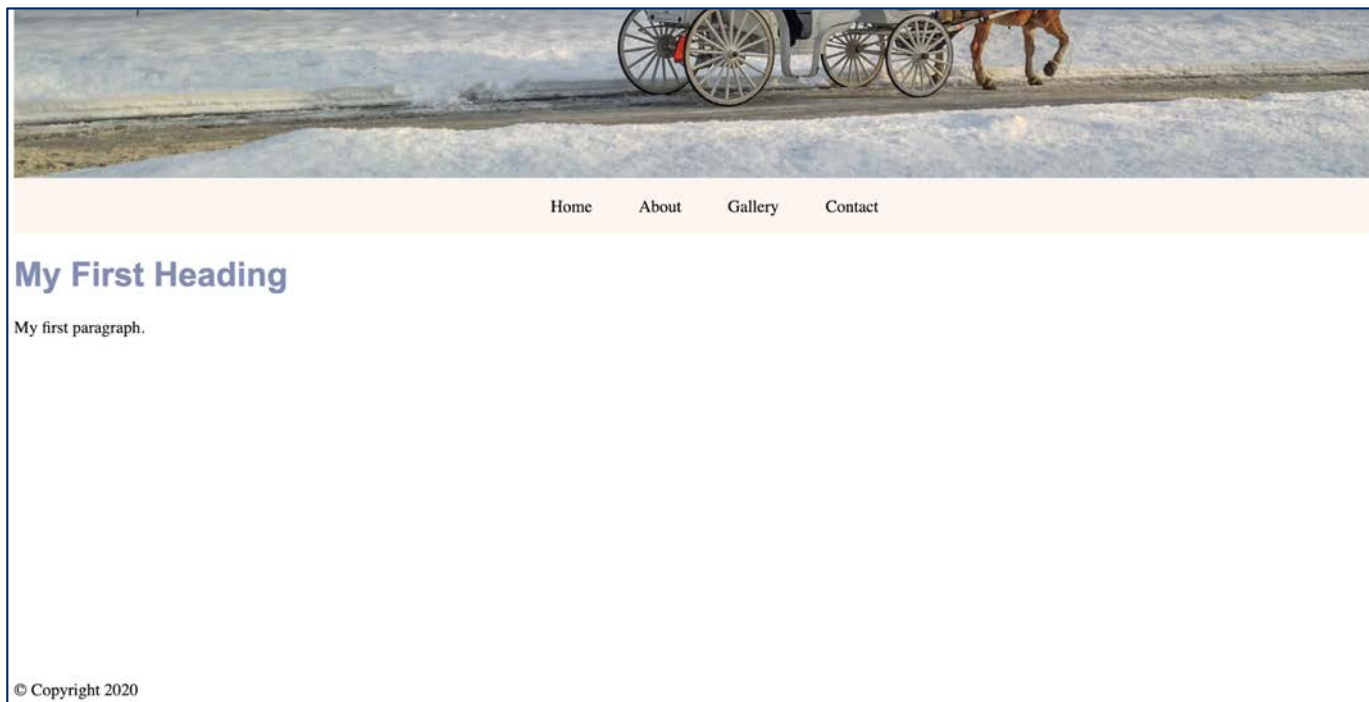



In-Class Exercise/Demo


- The last area left to style is the footer. We'll give this box some additional height (*height*), a background color (*background-color*), center align the texts (*text-align*), push the text down slightly (*padding-top*) and lighten the font color (*color*).

```
main h1 {  
  color:rgb(129, 141, 179);  
  font-family: arial;  
}  
footer {  
  height: 40px;  
  background-color:rgb(129, 141, 179);  
  text-align: center;  
  padding-top: 20px;  
  color:rgb(211, 218, 240);  
}  
</style>
```




In-Class Exercise/Demo

- When preview on the browser:

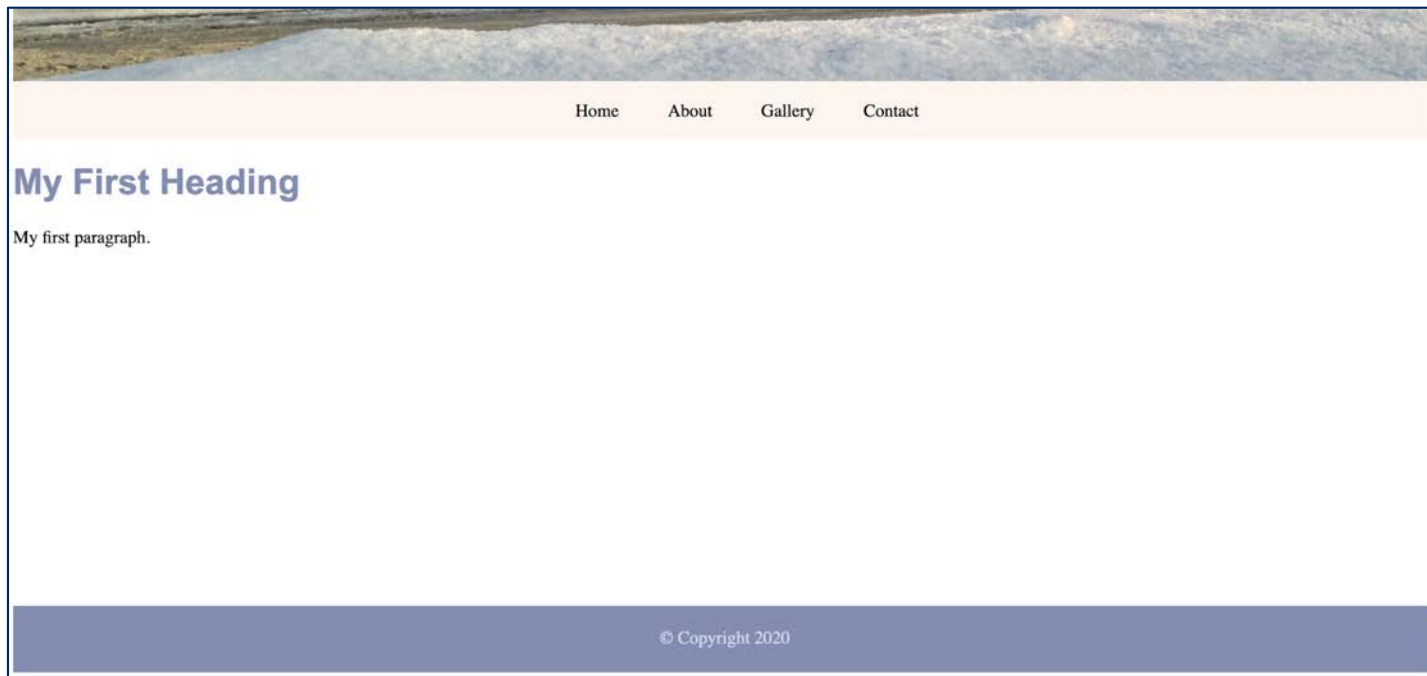

Commit (message: css commit 3) and push to Github.



In-Class Exercise/Demo

- Due:
 - Today 10.30PM PT.
- Submission
 - Post Github URL link in GAP Week 2 Day 1 Exercise.

Questions?