

FILE SYSTEM

[How to create a SMB, NFS Share and NAS Server on EMC Unity SAN using Unisphere - YouTube](#)

1.CREATING NAS SMB SERVER



Hopkinton FNM00175100028 Unisphere

DASHBOARD

SYSTEM

System View

Performance

Service

STORAGE

Pools

Block

File

VMware

ACCESS

Hosts

VMware

Initiators

PROTECTION & MOBILITY

Snapshot Schedule

Replication

Create a NAS Server

General

Interface

Sharing Protocols

Unix Directory Service

DNS

Replication

Summary

Results

Configure NAS Server General Settings

Server Name *CIFS NAS SERVER

Tenant:Select or enter a tenant.

Pool *DynamicPool-02 (Extreme Performance Ti

Storage Processor *SP A

CancelNext

Create a NAS Server

General

Interface

Sharing Protocols

Unix Directory Service

DNS

Replication

Summary

Results

Configure NAS Server Address

Ethernet Port: *4-Port Card Ethernet Port 1 (Link Up, Actual Speed: 1 Gbps, MTU: 1500 Bytes, Connector Type: R

IP Address: *100.12.24.11

Subnet Mask / Prefix Length: *255.255.254.0

Gateway:

VLAN ID:-- Edit

CancelBackNext

Create a NAS Server

General

Interface

Sharing Protocols

Unix Directory Service

DNS

Replication

Summary

Results

Configure Sharing Protocols

☐ Multiprotocol

☒ Windows Shares (SMB, CIFS)

☐ Standalone

☒ Join to the Active Directory domain

SMB Computer Name: *test

SMB Server Description:

Windows Domain: *trntad.com

Domain Privileged Username: *Administrator

Password: *

Advanced (Using defaults)

☐ Enable NFSv3

☐ Enable NFSv4

☐ Enable VVols

To successfully join to the Active Directory domain or to enable secure NFS, DNS servers and system NTP are required.

To enable access from Windows to a multiprotocol file system, each Windows user must map to a Unix UID and GID.

You cannot disable multiprotocol once a file system exists.

When multiprotocol is enabled at least one nfs protocol shall be enabled.

CancelBackNext

Create a NAS Server

General

Interface

Sharing Protocols

DNS

Replication

Summary

Results

Configure NAS Server DNS

☒ Enable DNS

Domain: *

tntad.com

Servers: *

Add

Move Up

Move Down

Remove

DNS is required for connecting to Active Directory domain controllers.

The NAS server uses the storage system's NTP settings for synchronizing the clock with the domain controllers.

Cancel

Back

Next

Create a NAS Server

General

Interface

Sharing Protocols

DNS

Replication

Summary

Results

Configure NAS Server DNS

☒ Enable DNS

Domain: *

tntad.com

Servers: *

Add

Move Up

Move Down

Remove

DNS is required for connecting to Active Directory domain controllers.

The NAS server uses the storage system's NTP settings for synchronizing the clock with the domain controllers.

Cancel

Back

Next

General

Interface

Sharing Protocols

DNS

Replication

Summary

Results

Configure NAS Server DNS

☒ Enable DNS

Domain: *

tntad.com

Servers: *

Add

Move Up

Move Down

Remove

DNS is required for connecting to Active Directory domain controllers.

The NAS server uses the storage system's NTP settings for synchronizing the clock with the domain controllers.

New IP Address for DNS Server

IP Address: *

191.45.11.4

Cancel

Add

Cancel

Back

Next

Create a NAS Server

General

Interface

Sharing Protocols

DNS

Replication

Summary

Results

Configure NAS Server DNS

☒ Enable DNS

Domain:

Servers:

Add

Move Up

Move Down

Remove

! DNS is required for connecting to Active Directory domain controllers.

The NAS server uses the storage system's NTP settings for synchronizing the clock with the domain controllers.

Cancel

Back

Next

Replication can be ignored by unchecking both.

Create a NAS Server

General

Interface

Sharing Protocols

DNS

Replication

Summary

Results

Provide a Replication Mode and RPO

☐ Enable Synchronous Replication

Replicate To:

Destination Configuration (Using defaults)

☒ Enable Asynchronous Replication

Replication Mode:

RPO: minutes

Replicate To:

[Destination Configuration](#) (Using defaults)

! Selecting a longer RPO may result in a larger data loss in the case of a failure. A shorter RPO may impact performance.

To create a remote replication connection, navigate to the Protection & Mobility > Replication > Connections section.

To create interfaces for use with remote replication, navigate to the Protection & Mobility > Interfaces section.

Cancel

Back

Next

Create a NAS Server

General

Interface

Sharing Protocols

DNS

Replication

Summary

Results

NAS Server Configuration

Name:

Tenant:

Pool:

Storage Processor:

Multiprotocol:

NAS Server Interface Configuration

Ethernet Port:

IP Address:

Subnet Mask / Prefix Length:

Support Linux/Unix Shares (NFS) - None

Support Windows Shares (SMB) - Configured

Join to the Active Directory domain:

SMB Computer Name:

Windows Domain:

User Name:

NetBIOS Name:

Organizational Unit:

Cancel

Back

Finish

Create a NAS Server

General

Interface

Sharing Protocols

DNS

Replication

Summary

Results

Results

Create Nas Server

Overall status: 80% Completed

Details

Create Nas Server

Create Nas Server Interface

CREATE_NAS_SERVER_DNS_TASK_DESCRIPTION

CREATE_NAS_SERVER_SMB_TASK_DESCRIPTION

CREATE_NAS_SERVER_ASYNC_REPLICATION_TASK_DESCRIPTION

Completed

Completed

Completed

Completed

Completed

Close

CIFS NAS server has been created successfully.

Clients will access the shares using CIFS-NAS server IP.

2. CREATING SMB/CIFS SHARE WINDOWS

ATC Lab Gateway

Info

Live Chat

Dell EMC Unity XT: Unisphere Management Lab

SK

Sulthan Sharief K S

Hopkinton FNM00175100028 Unisphere

91T 46%

DELL EMC

Unisphere Hopkinton

File Systems

SMB Shares

NFS Shares

NAS Servers

Tenants

15 items

More Actions

		Name	Size (GB)	Allocated (%)	Used (%)	NAS Server	Pool
		DemoNFS	400.0			DemoNFSOnly	DynamicPool...
		DemoNFS	400.0			DR_DemoNFS...	DynamicPool...
		DemoNFSMet...	100.0			DemoNFSMet...	DynamicPool...
		DemoNFSRe...	100.0			DemoNFSRe...	DynamicPool...
		DemoNFS_FL...	100.0			DemoNFSOnly	DynamicPool...
		DemoNFS_FL...	100.0			DR_DemoNFS...	DynamicPool...
		DemoNFS_FL...	200.0			DemoNFSOnly	DynamicPool...
		DemoNFS_FL...	200.0			DR_DemoNFS...	DynamicPool...
		EngineeringNFS	10,000.0			Engineering	DynamicP...
		FSNProtected...	1,000.0			FSNProtected...	DynamicPool...
		ManTestResu...	5,000.0			Manufacturing	DynamicPool...
		MultiProtocolF	1,000.0			DemoMultiPro	DynamicPool...

Status:

Description:

Thin:

Data Reduction:

Advanced Deduplication:

Data Reduction Savings:

Pool:

Level Retention:

Has Protected Files:

NAS Server:

Protocol:

Create a File System

Protocol

Name

FLR

Storage

Shares

Snapshot

Replication

Summary

Results

Configure the Protocols the File System Supports

☐ Linux/Unix Shares (NFS)

☒ Windows Shares (SMB)

☐ Multiprotocol Shares (SMB and NFS)

NAS Server:

DemoSMBOnly (Replication: No, Multiprotocol: No)

DemoSMBOnly (Replication: No, Multiprotocol: No)

test (Replication: Yes, Multiprotocol: No)

Cancel

Next

Create a File System

Protocol

Name

FLR

Storage

Shares

Snapshot

Replication

Summary

Results

Provide a Name and Description

Name: *

test_SMB

Description:

Just for our reference its no share name which clients see, this is local path created in EMC UNITY BOX(Local directory)

Cancel

Back

Next

Create a File System

Protocol

Name

FLR

Storage

Shares

Snapshot

Replication

Summary

Results

Configure the File-level Retention

☒ Off

☐ Enterprise

☐ Compliance

FLR type cannot be changed after file system creation.

Cancel

Back

Next

Create a File System

Protocol

Name

FLR

Storage

Shares

Snapshot

Replication

Summary

Results

Configure the File System Storage Characteristics

Pool:

DynamicPool-01 (Extreme Performance Tier, 66.7 TB free)

Size:

100

 GB

☒ Thin

☐ Data Reduction

What is Data Reduction?

Cancel

Back

Next

Create a File System

Protocol

Name

FLR

Storage

Shares

Snapshot

Replication

Summary

Results

Configure the Initial Share

☒ SMB Share (Windows)

NAS Server: test

SMB Server: test.tntad.com

File System: test_SMB

Name: file\$

Description: this is the actual name of share user sees

Local Path: test_SMB/

SMB Share Path: \\test.tntad.com\\file\$
\\234.1.1.1\\file\$

Cancel

Back

Next

Create a File System

Protocol

Name

FLR

Storage

Shares

SMB Share's Other Settings

Snapshot

Replication

Summary

Results

Configure the SMB Share's Other Settings

SMB properties:

☐ Continuous Availability

☐ Protocol Encryption

☐ Access-Based Enumeration

☐ Branch Cache Enabled

Offline Availability:

Offline Availability: None

Cancel

Back

Next

Create a File System

Protocol

Name

FLR

Storage

Shares

SMB Share's Other Settings

Snapshot

Replication

Summary

Results

Configure Snapshot Schedule

☒ Enable Automatic Snapshot Creation

Snapshot schedule:

CustomSchedule-01

New Schedule

This schedule will create snapshots: Every 16 hours, retain for 7 hours and every day at 12:00 AM, retain for 7 days

Cancel

Back

Next

Create a File System

Protocol

Name

FLR

Storage

Shares

SMB Share's Other Settings

Snapshot

Replication

Summary

Results

Provide a Replication Mode and RPO

A replication session will be created with the same attributes as the associated NAS server session.

☒ Enable Asynchronous Replication

Replication Mode:

Asynchronous

RPO:

30

 minutes

Replicate To:

Local

Destination Configuration (Using defaults)

☒ Support Asynchronous Snap Replication

☐ Replicate scheduled snapshots: CustomSchedule-01

Remote Retention Policy

Hourly: Retain for 7 hours (same as source)

Daily/Weekly: Retain for 1 week (same as source)

Customize

Selecting a longer RPO may result in a larger data loss in the case of a failure. A shorter RPO may impact performance.

To create a remote replication connection, navigate to the Protection & Mobility > Replication > Connections section.

To create interfaces for use with remote replication, navigate to the Protection & Mobility > Interfaces section.

Cancel

Back

Next

Create a File System

Protocol

Name

FLR

Storage

Shares

SMB Share's Other Settings

Snapshot

Replication

Summary

Results

Summary

Type Settings

Share Type: Windows Shares (SMB)

NAS Server: test

Advanced Type Settings

Oplocks Enabled: true

Name and Description

Name: test_SMB

Description: Just for our reference its no share name which clients see, this is local path created in EMC UNI...

Storage Characteristics

Pool: DynamicPool-01

Size (GB): 100.0

Thin: Yes

Data Reduction: No

Advanced Deduplication: No

File-level Retention: Off

Share General Settings

Cancel

Back

Finish

3.CREATING NFS NAS (UNIX/LINUX) SERVER

ATC Lab Gateway

InfoLive Chat

Dell EMC Unity XT: Unisphere Management Lab

Sulthan Sharief K S

Hopkinton FNM00175100028 Unisphere

Unisphere Hopkinton

Block:FileVMwareACCESS:HostsVMwareInitiatorsPROTECTION & MOBILITY:Snapshot ScheduleReplicationInterfacesImportEVENTS:AlertsJobsLogsSUPPORT

File SystemsSMB SharesNFS SharesNAS ServersTenants

10 items

	Name	Tenant	SP	Replication Types	
				Synchronous	Asynchronous
☐	DR_DemoNFSOnly	--	SP A	None	Local
☐	DemoMultiProtocol	--	SP B	None	None
☐	DemoNFSMetroSync	--	SP A	Remote	None
☐	DemoNFSOnly	--	SP B	None	Local
☐	DemoNFSRemoteAsync	--	SP A	None	Remote
☐	DemoSMBOnly	--	SP B	None	None
☐	Engineering	Engineering	SP A	None	None
☐	FSNProtected-01	--	SP A	None	None
☐	Manufacturing	Manufacturing	SP B	None	None
☐	test	--	SP A	--	Remote

Status:Pool:IP Addresses:Protocols:SMB Server:File Systems:NFS Shares:SMB Shares:Datastores:Datastore:Shares:Data Reduction:Savings:Synchronous:Replication Type:

Create a NAS Server

General

Interface

Sharing Protocols

Unix Directory Service

DNS

Replication

Summary

Results

Configure NAS Server General Settings

Server Name: *

NAS NFS SERVER

Tenant:

Select or enter a tenant.

Pool: *

DynamicPool-01 (Extreme Performance Ti

Storage Processor: *

SP B

CancelNext

Create a NAS Server

General

Interface

Sharing Protocols

Unix Directory Service

DNS

Replication

Summary

Results

Configure NAS Server Address

Ethernet Port: *

4-Port Card Ethernet Port 0 (Link Up, Actual Speed: 1 Gbps, MTU: 1500 Bytes, Connector Type: R

IP Address: *

100.121.34.56

Subnet Mask / Prefix Length: *

255.255.254.0

Gateway:

VLAN ID:

-- Edit

CancelBackNext

Create a NAS Server

General

Interface

Sharing Protocols

Unix Directory Service

DNS

Replication

Summary

Results

Configure Sharing Protocols

☐ Multiprotocol
☐ Windows Shares (SMB, CIFS)
☒ Enable NFSv3
☐ Enable NFSv4
☐ Enable VVols

Configure secure NFS (Not Configured)

To successfully join to the Active Directory domain or to enable secure NFS, DNS servers and system NTP are required.

To enable access from Windows to a multiprotocol file system, each Windows user must map to a Unix UID and GID.

You cannot disable multiprotocol once a file system exists.

When multiprotocol is enabled at least one nfs protocol shall be enabled.

Cancel

Back

Next

UNIX DIRECTORY services need to be used if not DNS configured

Use local file uses script file to be uploaded or we can use LDAP

ATC Lab Gateway

Info

Live Chat

Dell EMC Unity XT: Unisphere Management Lab

Sulthan Sharief K S

Hopkinton FNM00175100028 Unisphere

Create a NAS Server

General

Interface

Sharing Protocols

Unix Directory Service

DNS

Replication

Summary

Results

Configure Unix Directory Service

☒ Use local files
☐ Enable a Unix Directory Service using NIS or LDAP: NIS

You can upload local files (password, group, hosts, netgroup, and homedir) from the NAS server details page after the NAS server is created.

Cancel

Back

Next

DNS is the important, based on this only, client list will be listed while creating shares to give access

ATC Lab Gateway

Info

Live Chat

Dell EMC Unity XT: Unisphere Management Lab

Hopkinton FNM00175100028 Unisphere

Create a NAS Server

General

Interface

Sharing Protocols

Unix Directory Service

DNS

Replication

Summary

Results

Configure NAS Server DNS

☒ Enable DNS

Domain:

Servers:

Add

Move Up

Move Down

Remove

Cancel

Back

Next

ATC Lab Gateway

InfoLive Chat

Dell EMC Unity XT: Unisphere Management Lab

Sulthan Sharief K S

Hopkinton FNM00175100028 Unisphere

Create a NAS Server

General

Interface

Sharing Protocols

Unix Directory Service

DNS

Replication

Summary

Results

Provide a Replication Mode and RPO

☐ Enable Synchronous Replication

Replicate To: APM00188817114 (172.16.100.238)

Destination Configuration (Using defaults)

☒ Enable Asynchronous Replication

Replication Mode: Asynchronous

RPO: 60 minutes

Replicate To: FNM00164600276

Destination Configuration (Using defaults)

1

Selecting a longer RPO may result in a larger data loss in the case of a failure. A shorter RPO may impact performance.

To create a remote replication connection, navigate to the Protection & Mobility > Replication > Connections section.

To create interfaces for use with remote replication, navigate to the Protection & Mobility > Interfaces section.

1

Ensure that Ethernet ports, link aggregations and FSN ports with same names are available on destination, otherwise use override to change port assignment to

Cancel

Back

Next

ATC Lab Gateway

InfoLive Chat

Dell EMC Unity XT: Unisphere Management Lab

Hopkinton FNM00175100028 Unisphere

Create a NAS Server

General

Interface

Sharing Protocols

Unix Directory Service

DNS

Replication

Summary

Results

Review Your Selections

NAS Server Configuration

Name:

NAS NFS SERVER

Tenant:

--

Pool:

DynamicPool-01

Storage Processor:

SP B

Multiprotocol:

No

NAS Server Interface Configuration

Ethernet Port:

4-Port Card Ethernet Port 0

IP Address:

100.121.34.56

Subnet Mask / Prefix Length:

255.255.254.0

Support Linux/Unix Shares (NFS) - Configured

NFSv3 enabled:

Yes

NFSv4 enabled:

No

Enable Secure NFS (with Kerberos):

No

VVOLs enabled:

No

Support Windows Shares (SMB) - None

Cancel

Back

Finish

4. CREATING NAS SHARE

ATC Lab Gateway

Info

Live Chat

Dell EMC Unity XT: Unisphere Management Lab

Hopkinton FNM00175100028 Unisphere

Dell EMC

Unisphere Hopkinton

DASHBOARD

SYSTEM

STORAGE

File

ACCESS

PROTECTION & MOBILITY

File Systems

SMB Shares

NFS Shares

NAS Servers

Tenants

More Actions

15 items

	Name	Size (GB)	Allocated (%)	Used (%)	NAS Server	Pool
☐	DemoNFS	400.0			DemoNFSOnly	DynamicPool-...
☐	DemoNFS	400.0			DR_DemoNFS...	DynamicPool-...
☐	DemoNFSMet...	100.0			DemoNFSRe...	DynamicPool-...
☐	DemoNFSRe...	100.0			DemoNFSRe...	DynamicPool-...
☐	DemoNFS_FL...	100.0			DemoNFSOnly	DynamicPool-...
☐	DemoNFS_FL...	100.0			DR_DemoNFS...	DynamicPool-...
☐	DemoNFS_FL...	200.0			DemoNFSOnly	DynamicPool-...
☐	DemoNFS_FL...	200.0			DR_DemoNFS...	DynamicPool-...
☐	EngineeringNFS	10,000.0			Engineering	DynamicPool-...
☐	FSNProtected...	1,000.0			FSNProtected...	DynamicPool-...
☐	ManTestResu...	5,000.0			Manufacturing	DynamicPool-...
☐	MultiProtocolF	1,000.0			DemoMultiPro	DynamicPool...

Status:

Description:

Thin:

Data Reducti

Advanced De

Data Reducti

Pool:

File-level Ret

FLR Has Prot

NAS Server:

Create a File System

Protocol

Configure the Protocols the File System Supports

☒ Linux/Unix Shares (NFS)

☐ Windows Shares (SMB)

☐ Multiprotocol Shares (SMB and NFS)

NAS Server:

DemoNFSMetroSync (Replication: Yes, Multiprotocol: No)

DemoNFSMetroSync (Replication: Yes, Multiprotocol: No)

DemoNFSOnly (Replication: Yes, Multiprotocol: No)

DemoNFSRemoteAsync (Replication: Yes, Multiprotocol: No)

Engineering (Replication: No, Multiprotocol: No)

FSNProtected-01 (Replication: No, Multiprotocol: No)

Manufacturing (Replication: No, Multiprotocol: No)

NAS NFS SERVER (Replication: Yes, Multiprotocol: No)

pNFS (Replication: No, Multiprotocol: No)

Cancel

Next

Create a File System

Protocol

Name

Provide a Name and Description

Name: *

Description:

local_path

Cancel

Back

Next

Create a File System

Protocol

Name

FLR

Storage

Shares

Snapshot

Replication

Summary

Results

Configure the File-level Retention

Off

Enterprise

Compliance

FLR type cannot be changed after file system creation.

Cancel

Back

Next

Create a File System

Protocol

Name

FLR

Storage

Shares

Snapshot

Replication

Summary

Results

Configure the File System Storage Characteristics

Pool:

DynamicPool-01 (Extreme Performance Tier, 66.7 TB free)

Size:

100

 GB

Thin

Data Reduction

What is Data Reduction?

Cancel

Back

Next

Create a File System

Protocol

Name

FLR

Storage

Shares

Snapshot

Replication

Summary

Results

Configure the Initial Share

NFS Share (Linux / Unix)

NAS Server: pNFS

File System: Purenfs

Name: pnfs

Description: NAS path for servers

Local Path: Purenfs/

NFS Share Path: 112.112.3.4/pnfs

Show NFS advanced settings

Cancel

Back

Next

i.If NAS server is using LDAP host will be automatically taken from script we uploaded or from the LDAP/NIS list, No need to add host here if that is the case.

ii.If NAS server is using DNS click on + and select hosts for access.

For file-based storage, you can configure each host to have no access, read-only access, read/write access, read-only root access or read/write root access.

If DNS is configured on NAS server

For file-based storage, you can configure each host to have no access, read-only access, read/write access, read-only root access or read/write root access.

After clicking OK, it will like below

For file-based storage, you can configure each host to have no access, read-only access, read/write access, read-only root access or read/write root access.

Based on requirement we customize snapshots, it will stored in same pool as share or we can uncheck as well

Create a File System

✓ Protocol

✓ Name

✓ FLR

✓ Storage

✓ Shares

✓ Access

• Snapshot

Replication

Summary

Results

Configure Snapshot Schedule

☒ Enable Automatic Snapshot Creation

Snapshot schedule: Default Protection New Schedule

This schedule will create snapshots: Every day at 3:00 AM, retain for 2 days

Cancel

Back

Next

Create a File System

✓ Protocol

✓ Name

✓ FLR

✓ Storage

✓ Shares

✓ Access

✓ Snapshot

• Replication

Summary

Results

Provide a Replication Mode and RPO

1

A replication session will be created with the same attributes as the associated NAS server session.

Selecting a longer RPO may result in a larger data loss in the case of a failure. A short RPO may impact performance.

To create a remote replication connection, navigate to the Protection & Mobility > Replication > Connections section.

To create interfaces for use with remote replication, navigate to the Protection & Mobility > Interfaces section.

Cancel

Back

Next

Review and Create share.

Create a File System

✓ Protocol

✓ Name

✓ FLR

✓ Storage

✓ Shares

✓ Access

✓ Snapshot

✓ Replication

• Summary

Results

Summary

Type Settings

Share Type: Linux/Unix Shares (NFS)

NAS Server: pnfs

Name and Description

Name: Purenfs

Description: local_path

Storage Characteristics

Pool: DynamicPool-01

Size (GB): 100.0

Thin: Yes

Data Reduction: No

Advanced Deduplication: No

File-level Retention: Off

Share General Settings

NFS Share (Linux / Unix): Yes

Name: pnfs

Description: NAS path for server

Cancel

Back

Finish

SHARE SNAPSHOT MANAGEMENT

File Systems

SMB Shares

NFS Shares

NAS Servers

Tenants

More Actions

16 items

		Name	Edit the selected File System	Allocated (%)	Used (%)	NAS Server	Pool
		DemoNFS_FL...	100.0			DemoNFSOnly	DynamicPool...
		DemoNFS_FL...	100.0			DR_DemoNFS...	DynamicPool...
		DemoNFS_FL...	200.0			DR_DemoNFS...	DynamicPool...
		DemoNFS_FL...	200.0			DemoNFSOnly	DynamicPool...
		EngineeringNFS	10,000.0			Engineering	DynamicPool...
		FSNProtected...	1,000.0			FSNProtected...	DynamicPool...
		ManTestResu...	5,000.0			Manufacturing	DynamicPool...
		MultiProtocolF...	1,000.0			DemoMultiPro...	DynamicPool...
		PublicSMB-01	500.0			DemoSMBOnly	DynamicPool...
		Purenfs	100.0			pNFS	DynamicPool...
		SharedFiles-01	500.0			DemoSMBOnly	DynamicPool...
		file\$	10.0			test	DynamicPool...

CREATING SNAPSHOT FOR A SHARE

file\$ Properties

General

Snapshots

Replication

Advanced

Snapshots

+

🗑️

🔄

✎

More Actions ▾

1 item 🔍 ⚙️

Snapshot Schedule

☐	Name	State	↑	Taken	Auto-Delete	Taken By	Shared	Access Type
☐	UTC_2022-0...	Ready		6/12/2022, ...	No	--	No	Share

Close

Apply


Modify Local retention policy based on the requirement, keep ACCESS Type as read/write, Snapshot can be restored only if its access type is read/write.

The 'Create Snapshot' dialog box is displayed over the 'fileS Properties' window. The 'Name' field contains 'snap-date'. The 'Description' field is empty. Under 'Local Retention Policy', 'Pool Automatic Deletion Policy' is selected. Under 'Access Type', 'Read/Write (shares)' is selected. The 'OK' button is highlighted.

Snapshot has been created

Name	State	Taken	Auto-Delete	Taken By	Shared	Access Type
✓ snap-date	Ready	6/12/2022, ...	Yes	--	No	Share

Restoring Snapshots

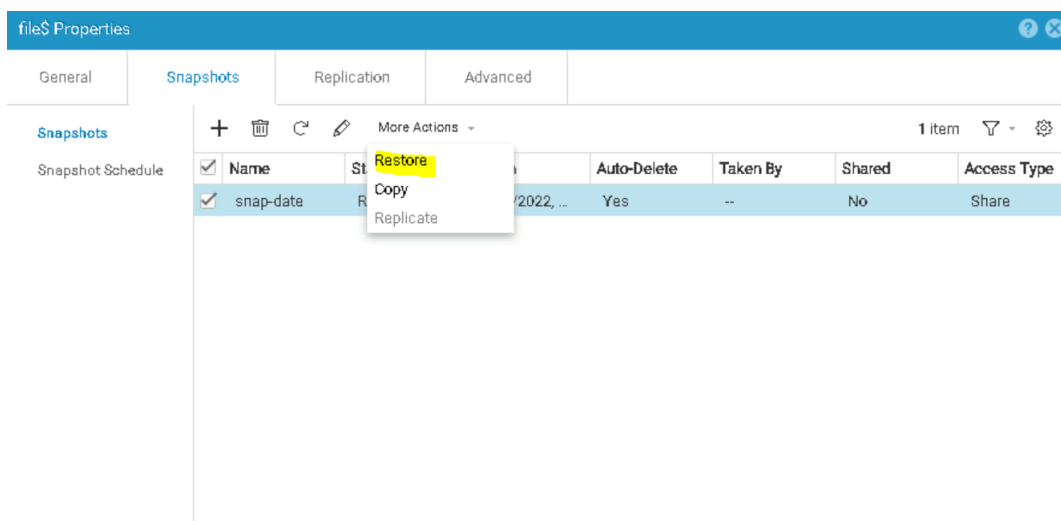

Restore snap-date

Storage resource file\$ will be restored from snapshot snap-date. The system will automatically create a restore point snapshot of the current storage resource before starting the restore.

Name:




EMC recommends that you quiesce the application running on the production host and flush the host cache to prevent data corruption during the restore.

Cancel OK

REPLICATION CONFIGURATION

ADDING DR(REPLICATION) SITE :

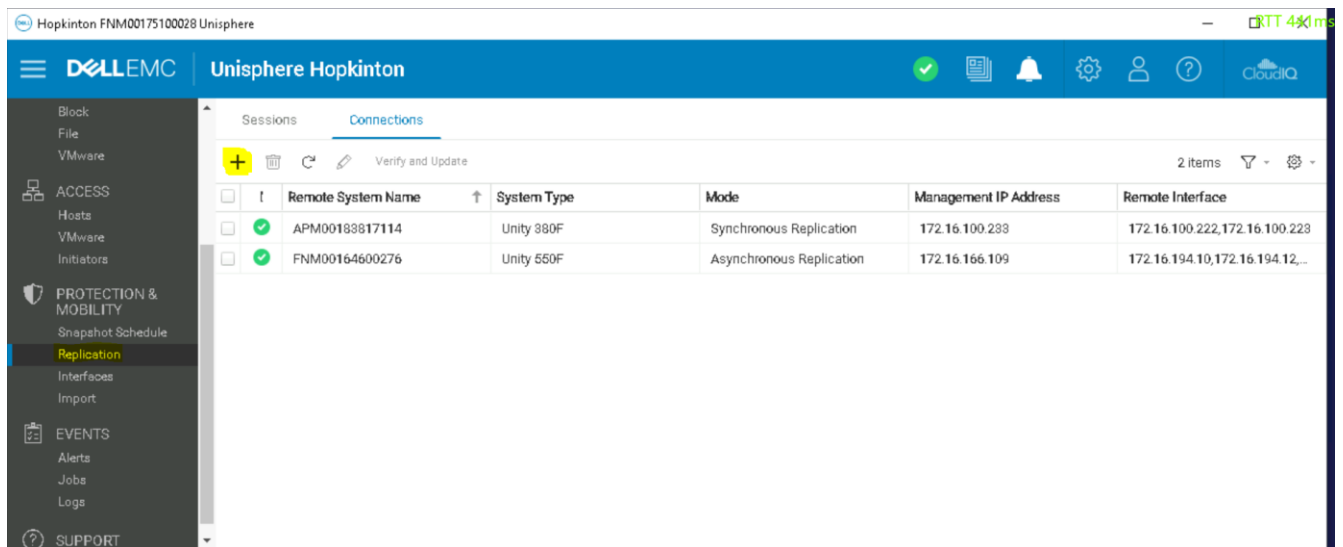

The screenshot shows the Dell EMC Unisphere interface for a system named 'Hopkinton FNM00175100028 Unisphere'. The left sidebar contains the following menu items: Block, File, VMware, ACCESS (with sub-items Hosts, VMware, Initiators), PROTECTION & MOBILITY (with sub-items Snapshot Schedule, Replication, Interfaces, Import), EVENTS (with sub-items Alerts, Jobs, Logs), and SUPPORT. The 'Replication' option is highlighted. The main content area shows the 'Connections' tab with a table of replication connections.

		Remote System Name	System Type	Mode	Management IP Address	Remote Interface
☐	✓	APM00183817114	Unity 380F	Synchronous Replication	172.16.100.233	172.16.100.222,172.16.100.223
☐	✓	FNM00164600276	Unity 550F	Asynchronous Replication	172.16.166.109	172.16.194.10,172.16.194.12,...

- i. Enter management ip of DR site Unity system and its creds
- ii. In Local system enter credentials of Prod unity(current).

