


Guide to hosting a NodeJS app on Render

Step 1: Sign Up on Render

Visit Render: Go to the Render website (<https://dashboard.render.com/>).

Connect to GitHub Account: Connect to Render using GitHub Account.

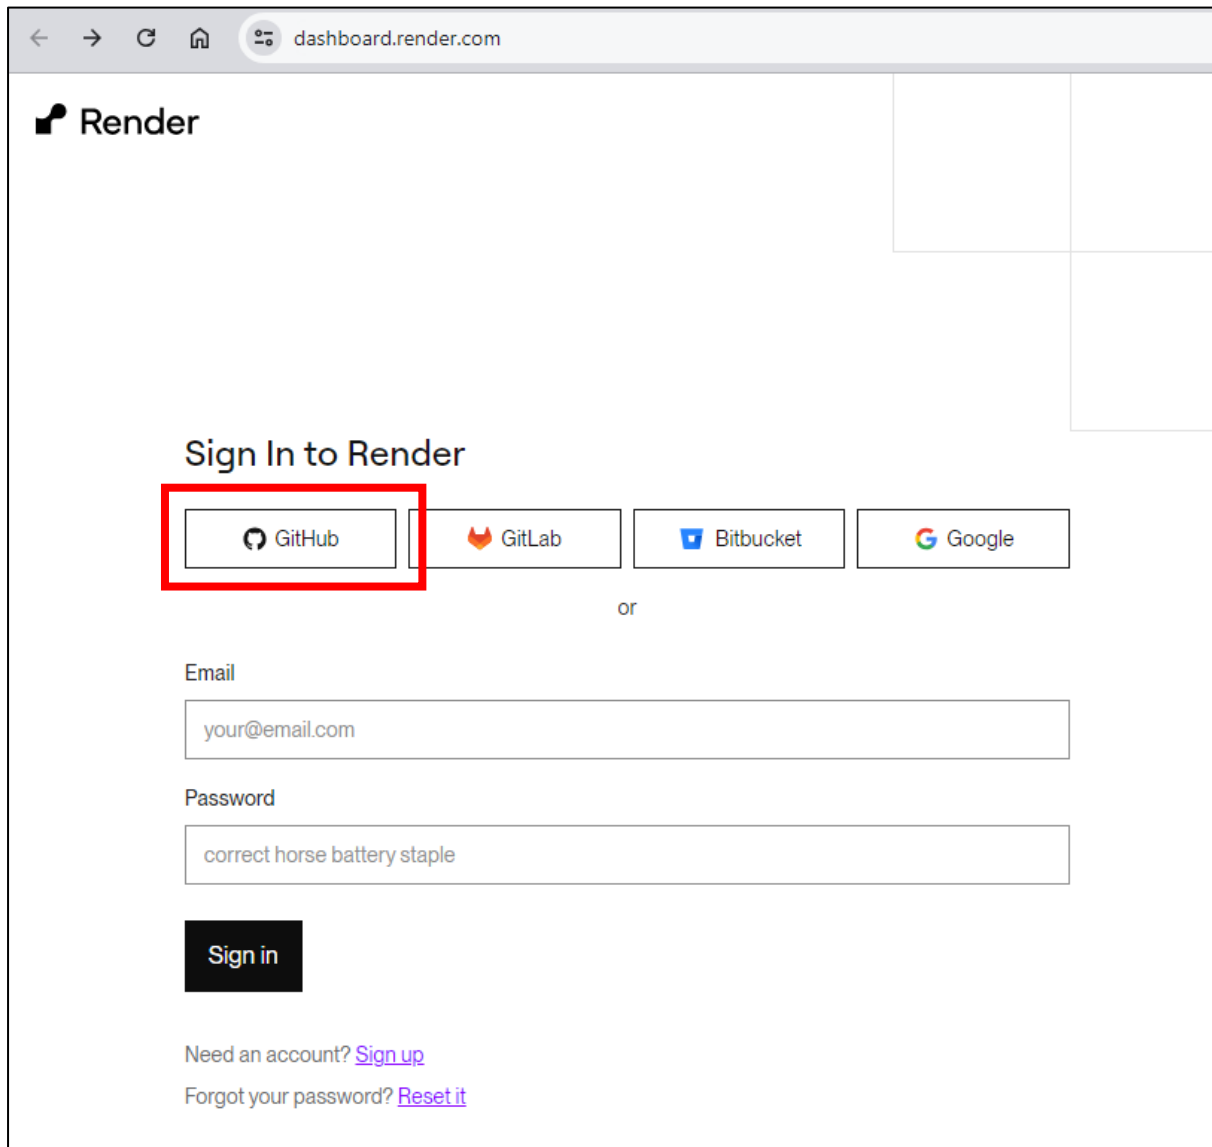

The screenshot shows the Render dashboard sign-in page. The browser address bar displays `dashboard.render.com`. The Render logo is in the top left. The main heading is "Sign In to Render". Below it, there are four buttons for social login: GitHub, GitLab, Bitbucket, and Google. The GitHub button is highlighted with a red rectangular box. Below these buttons is the word "or". Underneath, there are two input fields: "Email" with the placeholder text "your@email.com" and "Password" with the placeholder text "correct horse battery staple". A black "Sign in" button is positioned below the password field. At the bottom, there are two links: "Need an account? [Sign up](#)" and "Forgot your password? [Reset it](#)".


Step 2: Connect Your Repository

Create a New Web Service:

After logging in, go to the Render dashboard.

Click on the "New" button in the top-right corner.

Select "Web Service" from the dropdown menu.

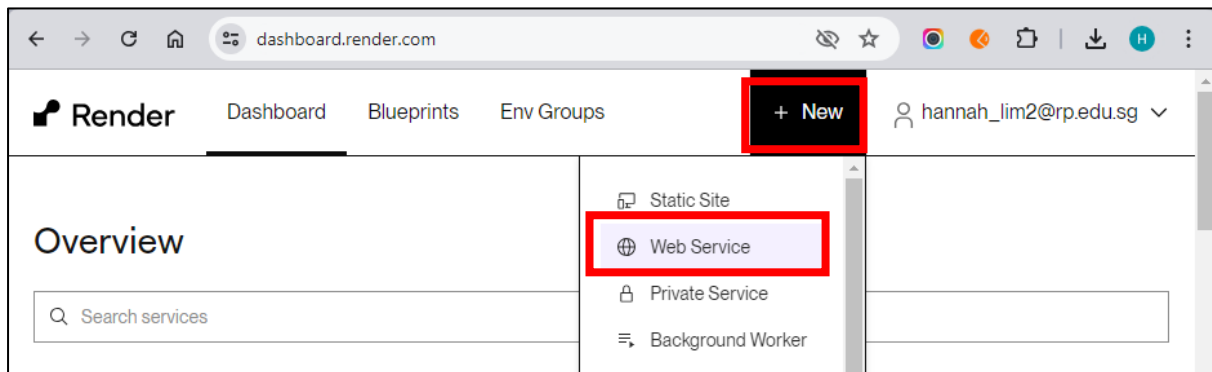


Authorize Render:

Connect Render to your GitHub account.

Authorize Render to access your repositories.

Select Repository:

Choose the repository containing your Node.js application.

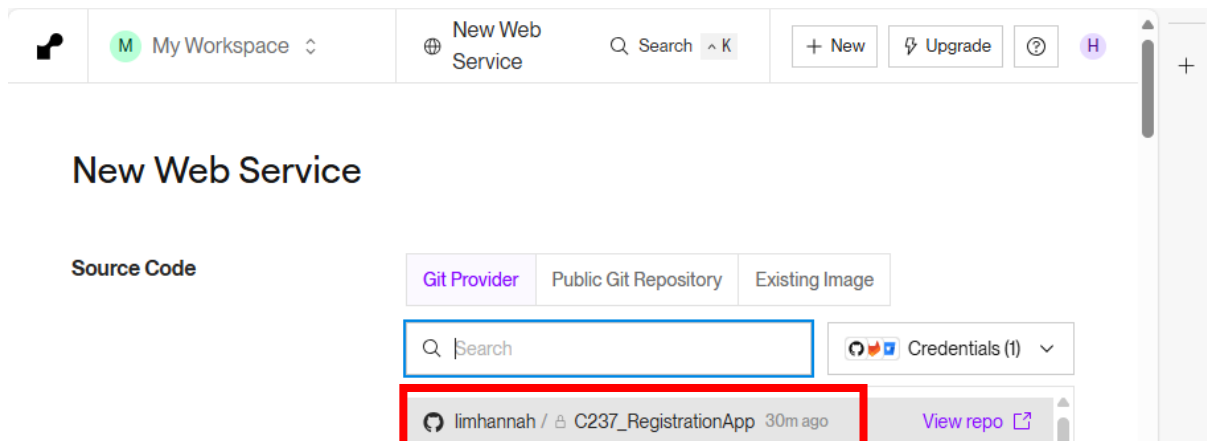

Step 3: Configure the Web Service

Settings for Web Service:

Name: Enter a **unique name** for your service. This will be the name which shows on the url.

Refer to the screenshot below for the other settings.

My Workspace

New Web Service

Search

+ New

Upgrade

?

H

Name
A unique name for your web service.

C237_RegistrationApp

Project Optional
Add this web service to a [project](#) once it's created.


Create a new project to add this to?
You don't have any projects in this workspace. [Projects](#) allow you to group resources into environments so you can better manage related resources.
[+ Create a project](#)

Language
Choose the [runtime environment](#) for this service.

Node

Branch
The Git branch to build and deploy.

main

Region
Your services in the same [region](#) can communicate over a [private network](#). You currently have services running in [Singapore](#).

 Singapore (Southeast Asia) 5 existing services

Deploy in a new region +

Root Directory Optional
If set, Render runs commands from this directory instead of the repository root. Additionally, code changes outside of this directory do not trigger an auto-deploy. Most commonly used with a [monorepo](#).

e.g. src

Build Command
Render runs this command to build your app before each deploy.


\$ yarn

Start Command
Render runs this command to start your app with each deploy.

\$ node app.js

Instance Type:

We will opt for the Free Tier as this is a basic testing project.

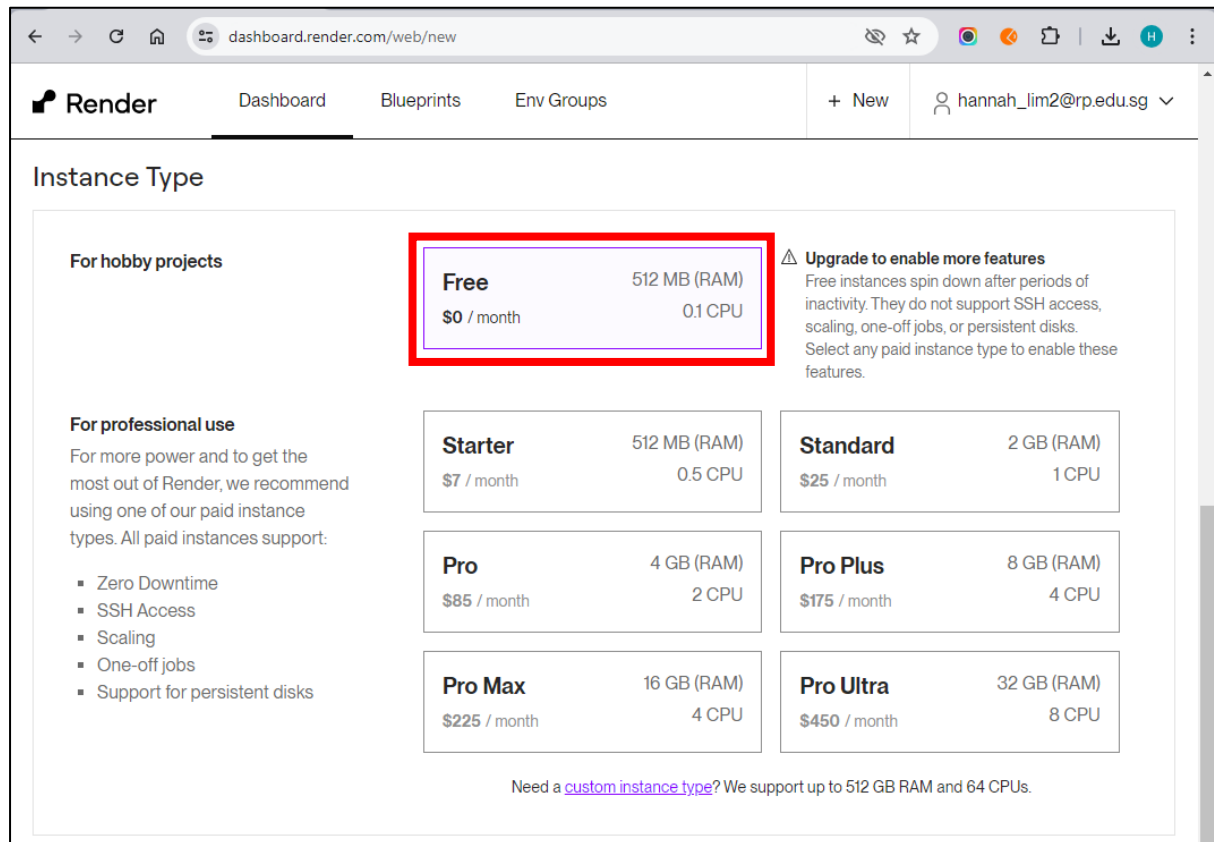

The screenshot shows the Render dashboard at `dashboard.render.com/web/new`. The navigation bar includes 'Render', 'Dashboard', 'Blueprints', 'Env Groups', '+ New', and a user profile 'hannah_lim2@rp.edu.sg'. The main section is titled 'Instance Type'.

For hobby projects

Free	512 MB (RAM) 0.1 CPU
\$0 / month	

Upgrade to enable more features
Free instances spin down after periods of inactivity. They do not support SSH access, scaling, one-off jobs, or persistent disks. Select any paid instance type to enable these features.

For professional use
For more power and to get the most out of Render, we recommend using one of our paid instance types. All paid instances support:

- Zero Downtime
- SSH Access
- Scaling
- One-off jobs
- Support for persistent disks

Starter	512 MB (RAM) 0.5 CPU	Standard	2 GB (RAM) 1 CPU
\$7 / month		\$25 / month	
Pro	4 GB (RAM) 2 CPU	Pro Plus	8 GB (RAM) 4 CPU
\$85 / month		\$175 / month	
Pro Max	16 GB (RAM) 4 CPU	Pro Ultra	32 GB (RAM) 8 CPU
\$225 / month		\$450 / month	

Need a [custom instance type](#)? We support up to 512 GB RAM and 64 CPUs.

We will leave the rest of the settings as default.

Step 4: Deploy Your Application

Deploy Web Service:

After configuring the settings, click the "Deploy Web Service" button.

Render will begin the deployment process, which includes building and starting your application.

Deployment Status:

Monitor the deployment status from the Render dashboard.

Logs will be available to troubleshoot any issues during the build and deployment process.

The screenshot shows the Render dashboard for a workspace named "My Workspace". The selected service is "C237Ay26_RegistrationApp". The dashboard includes a sidebar with navigation options: Dashboard, Events, Settings, MONITOR (Logs, Metrics), and MANAGE (Environment, Shell, Scaling, Previews, Disk, One-Off Jobs). The main content area shows the service name "C237Ay26_RegistrationApp" with a "Node" language and a "Free" plan. A "Deploy Web Service" button is visible. Below this, a log stream displays the deployment process. A red box highlights the final status: "Your service is live" and the primary URL: "https://c237ay26-registrationapp.onrender.com".

Try accessing your page by clicking on the url shown on the top left-hand side of the page.

Well done! You have successfully deployed your Registration App project.