

CIFAR-10 Dataset

Understanding and Utilizing a Classic Image
Classification Benchmark

By **Suman Rai**

Contents

- Introduction 01
- Objectives 02
- Dataset Composition 03
- Classes 04
- Approaches and Algorithms 05
- CNN Architecture 06
- Conclusion 07



INTRODUCTION

The CIFAR-10 Dataset is created by Canadian Institute for Advanced Research (CIFAR).The CIFAR-10 dataset is primarily used for image classification tasks and testing deep learning models. The CIFAR-10 dataset is a widely used collection of labeled images for machine learning and computer vision tasks It contains 60,000 color images of size 32x32 pixels, divided into 10 distinct classes. There are 50,000 training images and 10,000 test images for evaluation.



OBJECTIVES



- To build a model that can classify images from the CIFAR-10 Dataset.
- To understand the role of Convolution Neural Networks (CNN) in image recognition.
- To evaluate and improve model performance on test data.




DATASET COMPOSITION

- Contains 60,000 color images (32x32 pixels).
- Divided into 10 classes, with 6,000 images per class.
- 50,000 images for training, 10,000 images for testing.
- Classes: airplane, automobile, bird, cat, deer, dog, frog, horse, ship, truck.
- Images are low-resolution, making feature extraction challenging.

CLASSES

This Dataset has 10 categories:

1. Plane
2. Car
3. Bird
4. Cat
5. Deer
6. Dog
7. Frog
8. Horse
9. Ship
10. Truck

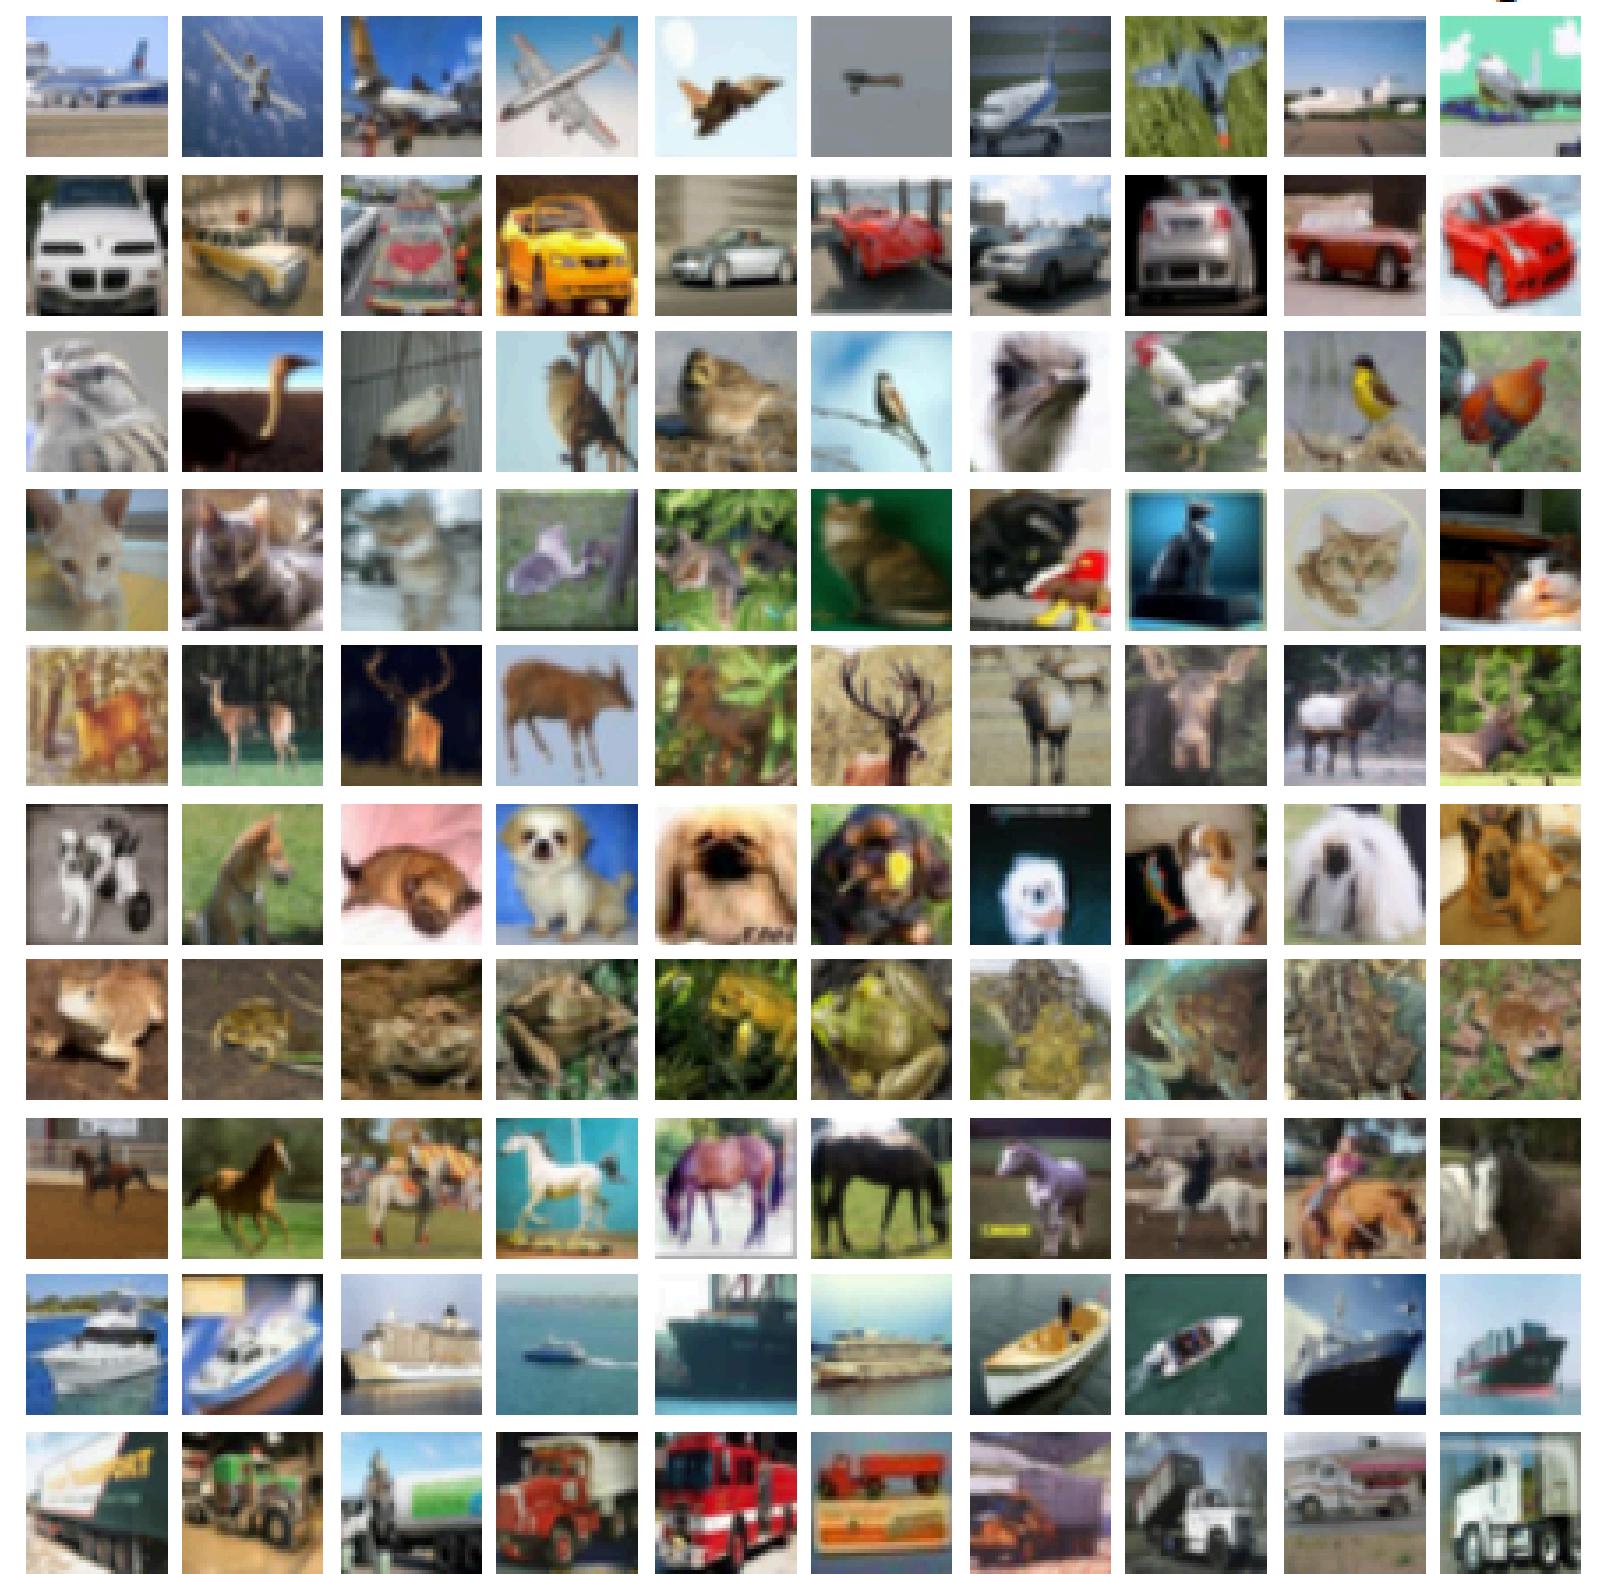

APPROACHES AND ALGORITHMS

CNNs are designed for image data and can automatically extract hierarchical features.

Convolutional Neural Network (CNN)

A Convolutional Neural Network (CNN) is a type of deep learning model mainly used for image and video recognition. It works by automatically detecting important features (like edges, shapes, and texture) using convolution layers. CNNs also use pooling layers to reduce data size and fully connected layers to make final predictions. They are highly effective because they learn directly from raw data without needing manual feature extraction. CNNs are widely applied in areas like computer vision, medical imaging, self-driving cars, and facial recognition. They consist of three main types of layers:

1. Convolution Layer
2. Pooling Layer
3. Fully Connected Layer

CNN ARCHITECTURE

Convolution Layer

It uses filters (kernels) to extract important features like edges, shapes, and textures from an image. It is basic building block of a CNN, which helps in understanding complex patterns.

Pooling Layer

A pooling layer in a CNN is the process of reducing the feature map size while keeping only the important features, which helps minimize the problem of overfitting.

Fully Connected Layer

In a fully connected layer, each neuron of one layer is connected to every neuron of the next layer. This layer combines the features extracted by convolution and pooling to produce the final output.

MODEL TRAINING

- Loss function: CrossEntropyLoss
- Optimizer: SGD
- Trained for 8 epochs to minimize loss and improve accuracy
- Test accuracy: 76.18%
- Train accuracy: 82.28%

CONCLUSION

- Using the CIFAR-10 dataset helps in understanding image classification and realizing the importance of CNN architecture.
- With the help of convolution, pooling, and fully connected layers, the model can learn features from images and make class predictions.
- Provides a foundation for understanding more complex computer vision like CIFAR-100 and ImageNet.



Large teal circles are scattered across the white background, varying in size and position.

THANK YOU