Jenkins Pipeline for MyMavenSelenium02

Step 1: Open the Jenkins Dashboard in order to create a new item

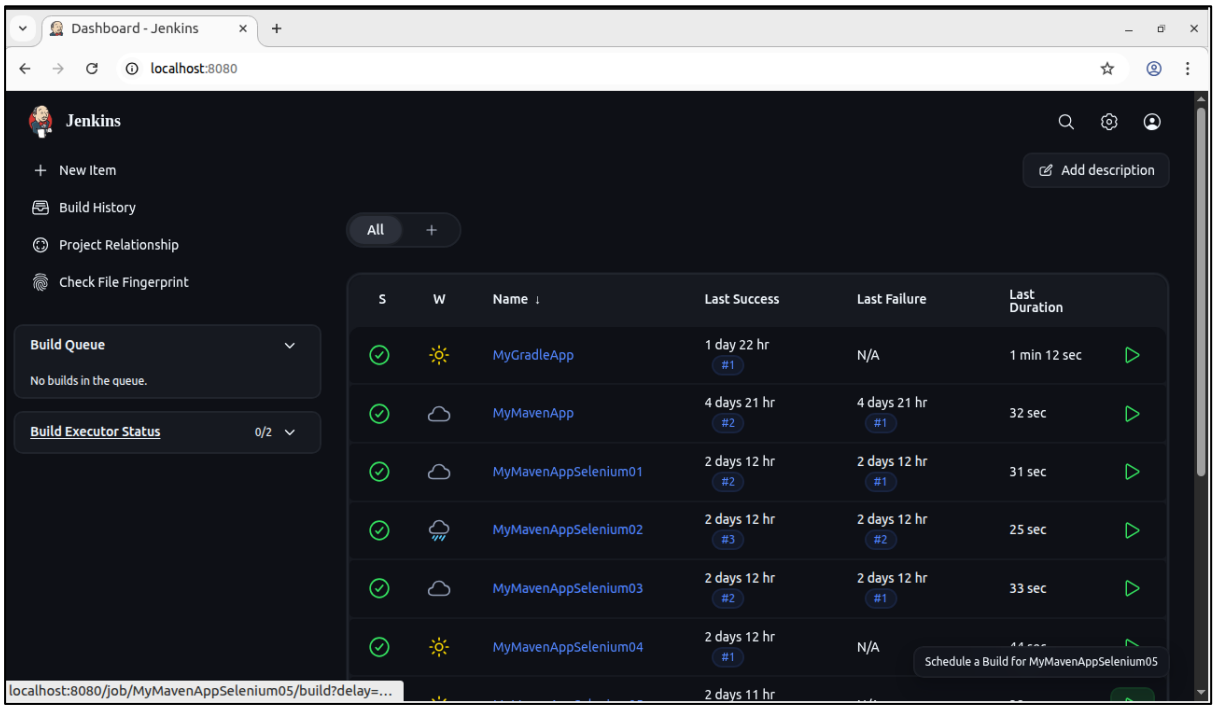

Step 2: Click on New Item in order for creating an New Item and thus give the name as “MyMavenAppSelenium02” and Item type as Pipeline and

Create it

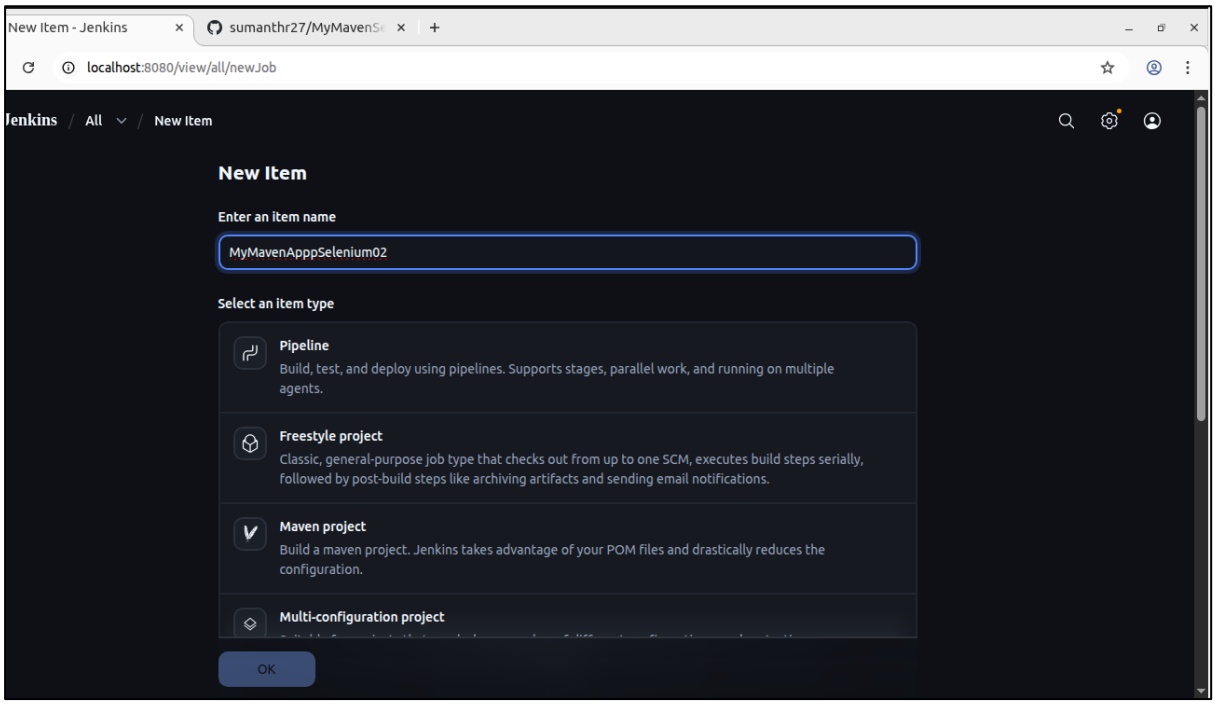

Step 3: Configure the settings by Defining the script as “Pipeline Script from SCM” and SCM as “Git”. Thus, now as we have selected Git, we need to paste the Repository URL of the project given in GitHub and choose Credentials as “GitHub Credentials” which was created earlier.

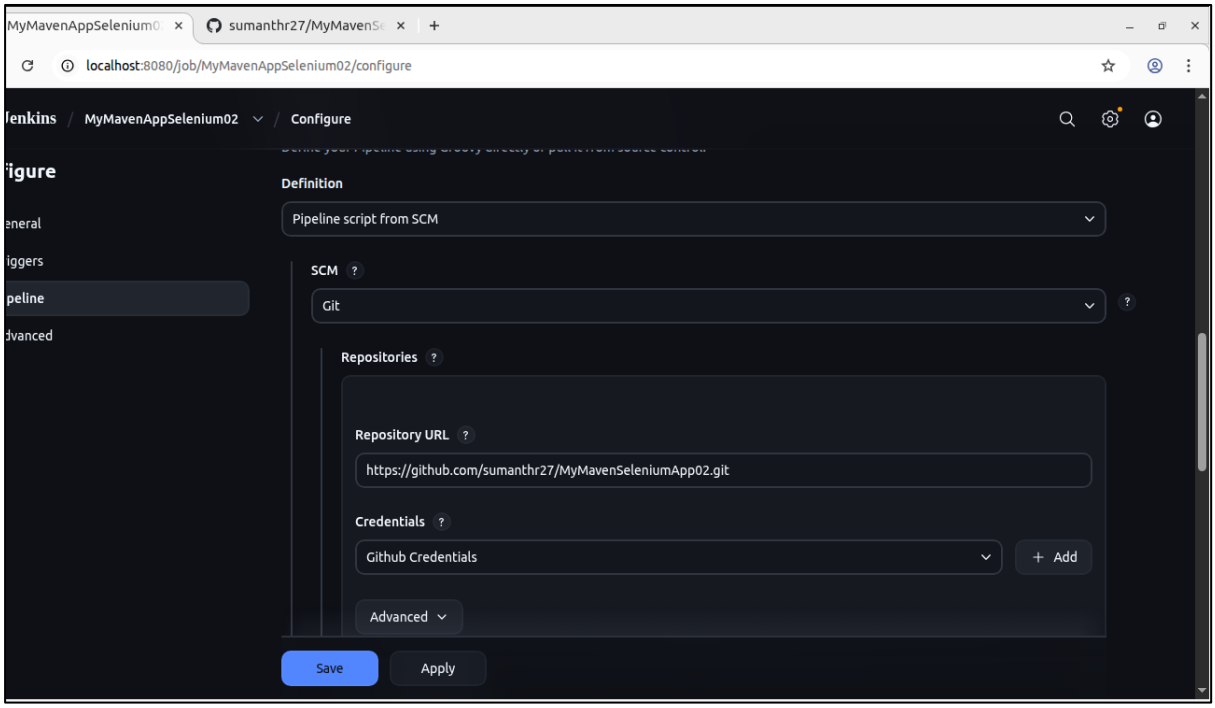

Step 4: Now in Terminal, go to directory created for MyMavenAppSelenium02 and create an new file called “Jenkinsfile”

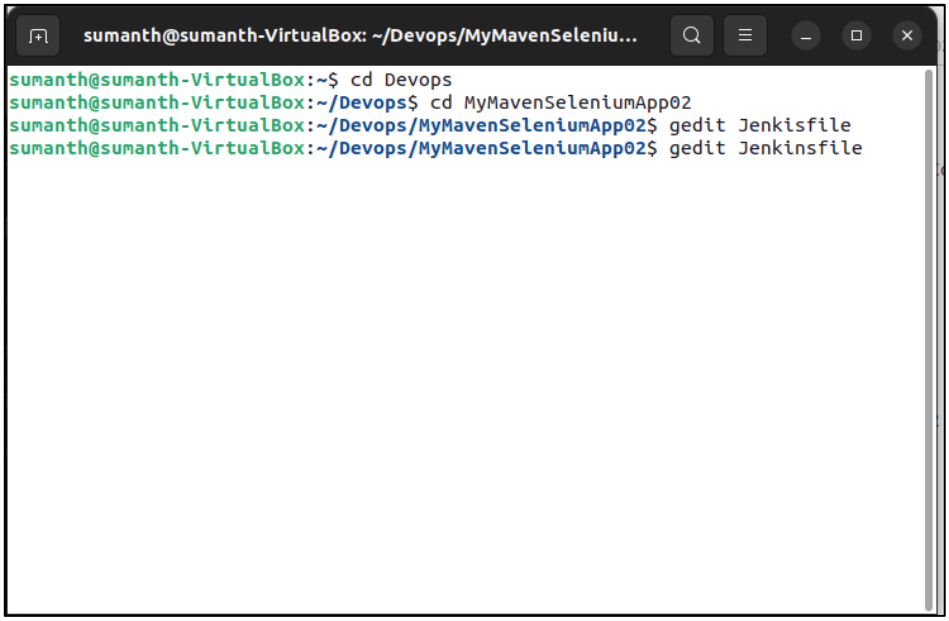

Step 5: Paste the available code inside the Jenkinsfile

Jenkinsfile
~/Devops/MyMavenSeleniumApp02

```
pipeline {
    agent any   // Run on any available agent

    tools {
        maven 'Maven'   // Must match name configured in Jenkins (Global Tool Config)
    }

    stages {

        stage('Checkout') {
            steps {
                // Recommended if repo is configured in Jenkins
                checkout scm

                // OR use this if not configured:
                // git url: 'https://github.com/sumanthr27/MyMavenSeleniumApp02.git', branch: 'master'
            }
        }

        stage('Build') {
            steps {
                sh 'mvn clean package'
            }
        }

        stage('Test') {
            steps {
                sh 'mvn test'
            }
        }
    }

    post {
        always {
            echo 'Pipeline execution completed'
        }
        success {
```

Plain Text Tab Width: 8 Ln 2, Col 46 INS

Step 6: We need to update pom.xml also in order to change the versions of source and target from 1.7 to 1.8

```
<!-- Example: Maven Compiler Plugin to compile Java code -->
<plugin>
<groupId>org.apache.maven.plugins</groupId>
<artifactId>maven-compiler-plugin</artifactId>
<version>3.8.1</version>
<configuration>
<source>1.8</source>
<target>1.8</target>
</configuration>
</plugin>
```

Step 7: Now we need to Push changes and commit by pushing the necessary "Jenkinsfile" to the respective Repo

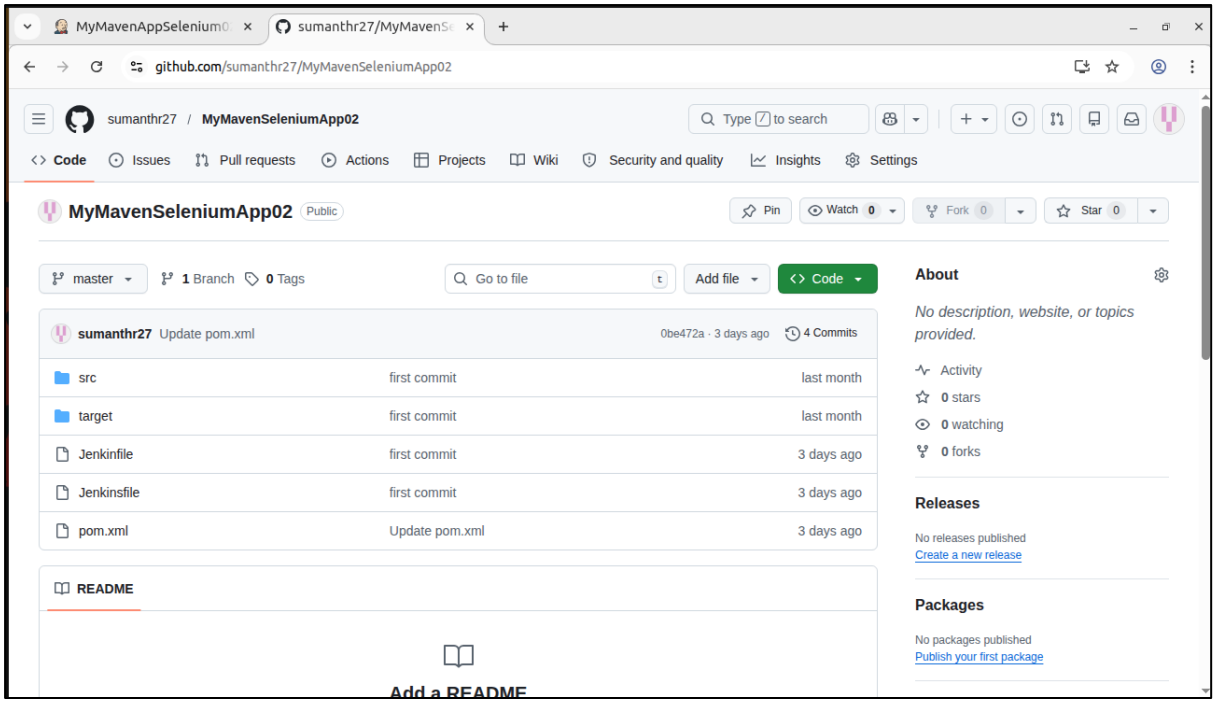

Step 8: Now go to Jenkins and Build the Pipeline and thus check the Stage view for the successful execution.

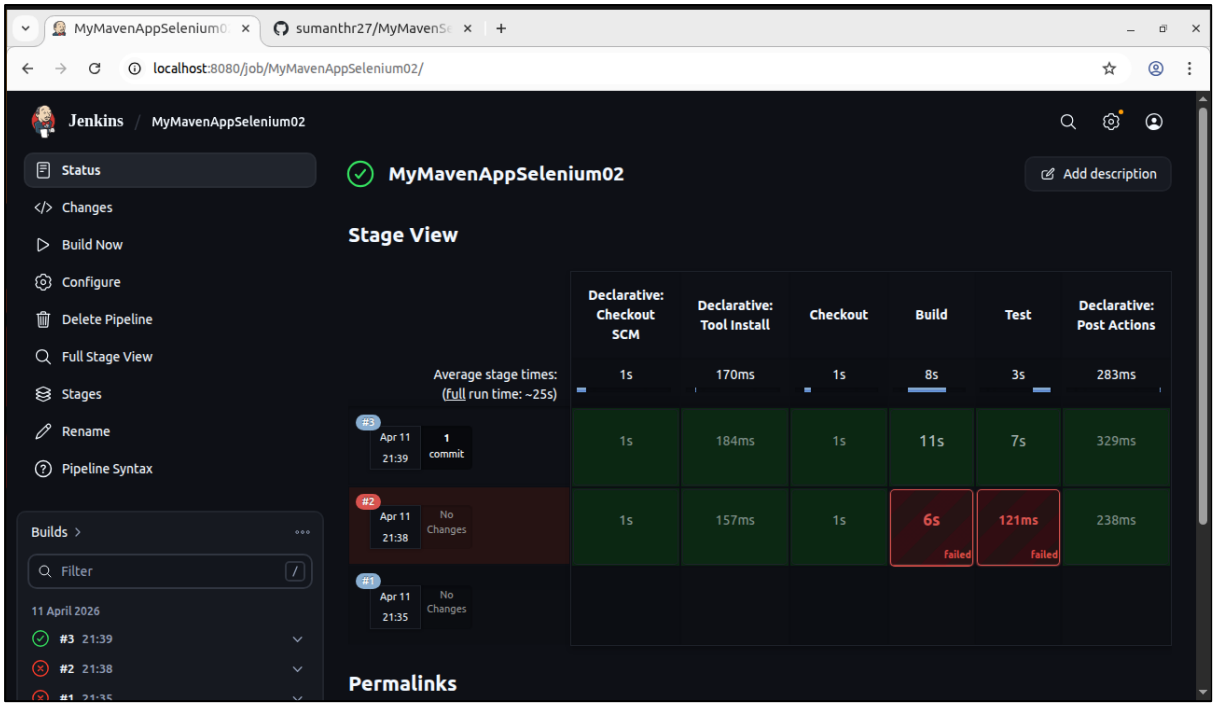

Program 4: Working with Selenium: Maven Project To Connect To Web Servers Using Selenium Dependency (**PractiseAutomation.com)**

Step 1: create a maven project on terminal by typing the command **mvn archetype:generate -DgroupId=com.example -DartifactId=MyMavenSeleniumApp02 -DarchetypeArtifactId=maven-archetype-quickstart -DinteractiveMode=false**

```
sumanth@sumanth-VirtualBox:~/devops$ mvn archetype:generate -DgroupId=com.example -DartifactId=MyMavenSeleniumApp02 -DarchetypeArtif
actiId=maven-archetype-quickstart -DinteractiveMode=false
[INFO] Scanning for projects...
[INFO]
[INFO] ------------------< org.apache.maven:standalone-pom >-------------------
[INFO] Building Maven Stub Project (No POM) 1
[INFO] --------------------------------[ pom ]---------------------------------
[INFO]
[INFO] >>> maven-archetype-plugin:3.4.1:generate (default-cli) > generate-sources @ standalone-pom >>>
[INFO]
[INFO] <<< maven-archetype-plugin:3.4.1:generate (default-cli) < generate-sources @ standalone-pom <<<
[INFO]
[INFO]
[INFO] --- maven-archetype-plugin:3.4.1:generate (default-cli) @ standalone-pom ---
[INFO] Generating project in Batch mode
[INFO] No archetype defined. Using maven-archetype-quickstart (org.apache.maven.archetypes:maven-archetype-quickstart:1.0)
[INFO] ----------------------------------------------------------------------------
[INFO] Using following parameters for creating project from Old (1.x) Archetype: maven-archetype-quickstart:1.0
[INFO] ----------------------------------------------------------------------------
[INFO] Parameter: basedir, Value: /home/sumanth/devops
[INFO] Parameter: package, Value: com.example
[INFO] Parameter: groupId, Value: com.example
[INFO] Parameter: artifactId, Value: MyMavenSeleniumApp02
[INFO] Parameter: packageName, Value: com.example
[INFO] Parameter: version, Value: 1.0-SNAPSHOT
[INFO] project created from Old (1.x) Archetype in dir: /home/sumanth/devops/MyMavenSeleniumApp02
[INFO] ------------------------------------------------------------------------
[INFO] BUILD SUCCESS
[INFO] ------------------------------------------------------------------------
[INFO] Total time:  1.641 s
[INFO] Finished at: 2026-03-19T14:24:44+05:30
[INFO] ------------------------------------------------------------------------
```

Step 2 : edit the pom.xml file and add the dependencies

The pom.xml has the code

```
<project xmlns="http://maven.apache.org/POM/4.0.0" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
 xsi:schemaLocation="http://maven.apache.org/POM/4.0.0 http://maven.apache.org/maven-v4_0_0.xsd">
 <modelVersion>4.0.0</modelVersion>
 <groupId>com.example</groupId>
 <artifactId>MyMavenPracticeAutomationApp</artifactId>
 <packaging>jar</packaging>
 <version>1.0-SNAPSHOT</version>
 <name>MyMavenPracticeAutomationApp</name>
 <url>http://maven.apache.org</url>


 <dependencies>
   <dependency>
     <groupId>junit</groupId>
     <artifactId>junit</artifactId>
     <version>3.8.1</version>
     <scope>test</scope>
   </dependency>


   <!-- https://mvnrepository.com/artifact/org.seleniumhq.selenium/selenium-java -->
<dependency>
   <groupId>org.seleniumhq.selenium</groupId>
   <artifactId>selenium-java</artifactId>
   <version>4.29.0</version>
</dependency>
 </dependencies>
```

```
  <!-- Build: Configuring plugins and build settings -->
<build>
<plugins>
<!-- Example: Maven Compiler Plugin to compile Java code -->
<plugin>
<groupId>org.apache.maven.plugins</groupId>
<artifactId>maven-compiler-plugin</artifactId>
<version>3.8.1</version>
<configuration>
<source>1.7</source>
<target>1.7</target>
</configuration>
</plugin>
<!-- Example: Maven Surefire Plugin to run tests -->
<plugin>
<groupId>org.apache.maven.plugins</groupId>
<artifactId>maven-surefire-plugin</artifactId>
<version>2.22.2</version>
</plugin>
<plugin>
            <groupId>org.apache.maven.plugins</groupId>

            <artifactId>maven-jar-plugin</artifactId>
            <version>3.0.1</version>
           <configuration>
                <archive>
                    <manifestEntries>
                        <Main-Class>com.example.App</Main-Class>
                    </manifestEntries>
                </archive>
            </configuration>
```

```
        </plugin>


</plugins>
</build>
</project>
```

Step 3: Edit the App.java

```
Open    App.java    Save
~/Devops/MyMavenSeleniumApp02/src/main/java/com/example
1 package com.example;
2 import org.openqa.selenium.By;
3 import org.openqa.selenium.WebDriver;
4 import org.openqa.selenium.chrome.ChromeDriver;
5 public class App
6 {
7     public static void main( String[] args )
8     {
9         WebDriver driver=new ChromeDriver();
10        driver.get("https://www.practicetestautomation.com/practice-test-login/");
11        driver.manage().window().maximize();
12        driver.findElement(By.id("username")).sendKeys("student");
13        driver.findElement(By.id("password")).sendKeys("Password123");
14        driver.findElement(By.id("submit")).click();
15    }
16 }
```

Step 4: build and run the maven application

To execute type the command **mvn exec:java -Dexec.mainClass="com.example.App"**

it openspracticeautomation.com and we can login using the credentials

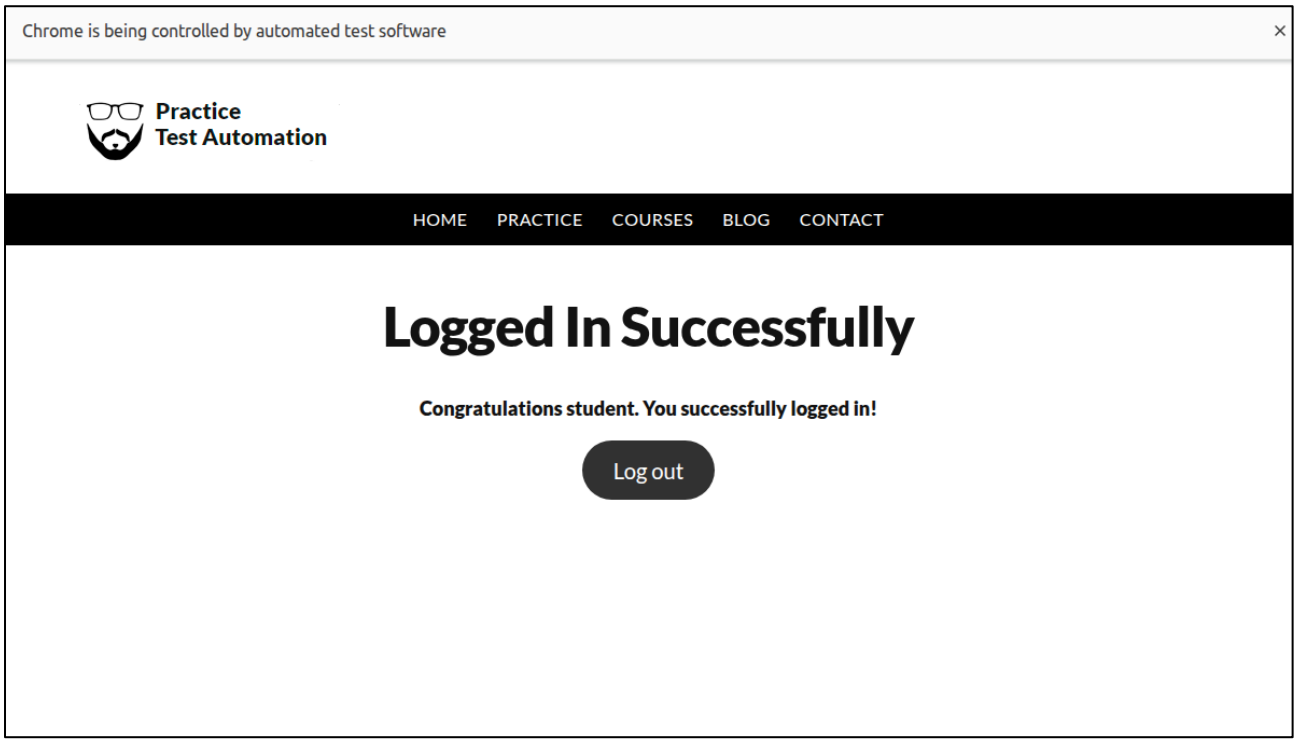
Chrome is being controlled by automated test software
Practice
Test Automation
HOME
PRACTICE
COURSES
BLOG
CONTACT
Logged In Successfully
Congratulations student. You successfully logged in!
Log out