SUMESH R -20104169

In [1]:
```python
import numpy as np
import pandas as pd
import matplotlib.pyplot as plt
import seaborn as sns
from sklearn.model_selection import train_test_split
from sklearn.linear_model import LinearRegression
```

In [2]:
```python
df = pd.read_csv("5_Instagram data.csv")
df
```

Out[2]:

	Impressions	From Home	From Hashtags	From Explore	From Other	Saves	Comments	Shares	Likes	Profile Visits	Follows
0	3920	2586	1028	619	56	98	9	5	162	35	2
1	5394	2727	1838	1174	78	194	7	14	224	48	10
2	4021	2085	1188	0	533	41	11	1	131	62	12
3	4528	2700	621	932	73	172	10	7	213	23	8
4	2518	1704	255	279	37	96	5	4	123	8	0
...	...	...	...	...	...	...	...	...	...	...	...
114	13700	5185	3041	5352	77	573	2	38	373	73	80
115	5731	1923	1368	2266	65	135	4	1	148	20	18

	Impressions	From Home	From Hashtags	From Explore	From Other	Saves	Comments	Shares	Likes	Profile Visits	Follows
116	4139	1133	1538	1367	33	36	0	1	92	34	10
117	32695	11815	3147	17414	170	1095	2	75	549	148	214
118	36919	13473	4176	▓▓▓▓							

```
In [3]:    df.head()
```

Out[3]:

												L
	4021	2085	1188	0	533	41	11	1	131	62	12	
												m
3	4528	2700	621	932	73	172	10	7	213	23	8	c pr

	Impressions	From Home	From Hashtags	From Explore	From Other	Saves	Comments	Shares	Likes	Profile Visits	Follows
4	2518	1704	255	279	37	96	5	4	123	8	0

an
v

Data cleaning and pre processin

In [4]:
```python
df.info()
```

```
Data columns (total 13 columns):
 #   Column          Non-Null Count  Dtype
---  ------          --------------  -----
 0   Impressions     119 non-null    int64
 1   From Home       119 non-null    int64
 2   From Hashtags   119 non-null    int64
 3   From Explore    119 non-null    int64
 4   From Other      119 non-null    int64
 5   Saves           119 non-null    int64
 6   Comments        119 non-null    int64
 7   Shares          119 non-null    int64
 8   Likes           119 non-null    int64
 9   Profile Visits  119 non-null    int64
 10  Follows         119 non-null    int64
 11  Caption         119 non-null    object
 12  Hashtags        119 non-null    object
dtypes: int64(11), object(2)
memory usage: 12.2+ KB
```

In [5]:
```python
df.describe()
```

Out[5]:

|	Impressions	From Home	From Hashtags	From Explore	From Other	Saves	Comments
count	119.000000	119.000000	119.000000	119.000000	119.000000	119.000000	119.000000
mean	5703.991597	2475.789916	1887.512605	1078.100840	171.092437	153.310924	6.663866
std	4843.780105	1489.386348	1884.361443	2613.026132	289.431031	156.317731	3.544576
min	1941.000000	1133.000000	116.000000	0.000000	9.000000	22.000000	0.000000
25%	3467.000000	1945.000000	726.000000	157.500000	38.000000	65.000000	4.000000
50%	4289.000000	2207.000000	1278.000000	326.000000	74.000000	109.000000	6.000000
75%	6138.000000	2602.500000	2363.500000	689.500000	196.000000	169.000000	8.000000
max	36919.000000	13473.000000	11817.000000	17414.000000	2547.000000	1095.000000	19.000000

In [6]:
```python
df.columns
```

Out[6]: Index(['Impressions', 'From Home', 'From Hashtags', 'From Explore',
               'From Other', 'Saves', 'Comments', 'Shares', 'Likes', 'Profile Visits',
               'Follows', 'Caption', 'Hashtags'],
              dtype='object')

EDA and VISUALIZATION

In [7]:
```python
sns.pairplot(df)
```
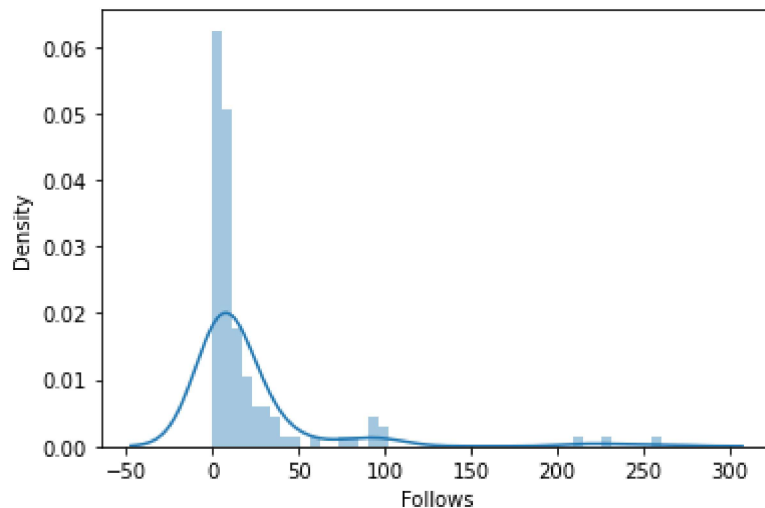
Out[7]: <seaborn.axisgrid.PairGrid at 0x2536e12ea90>
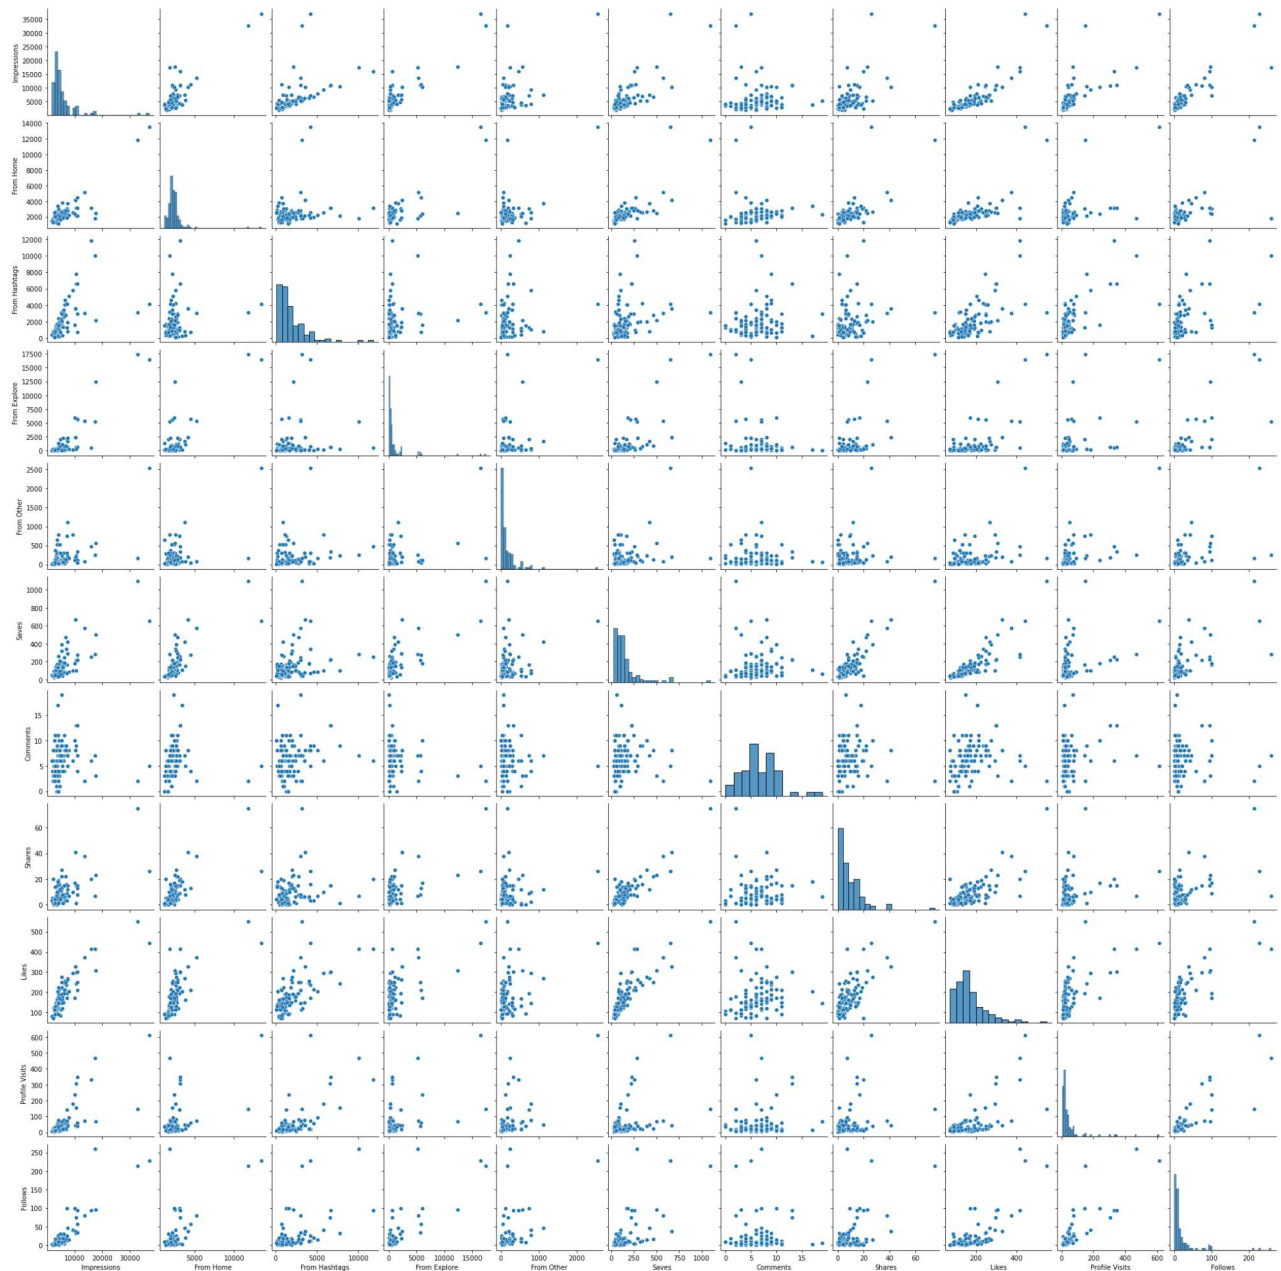
In [8]:
```python
sns.distplot(df["Follows"])
```

C:\ProgramData\Anaconda3\lib\site-packages\seaborn\distributions.py:2557: FutureWarning:
`distplot` is a deprecated function and will be removed in a future version. Please adap
t your code to use either `displot` (a figure-level function with similar flexibility) o

r `histplot` (an axes-level function for histograms).
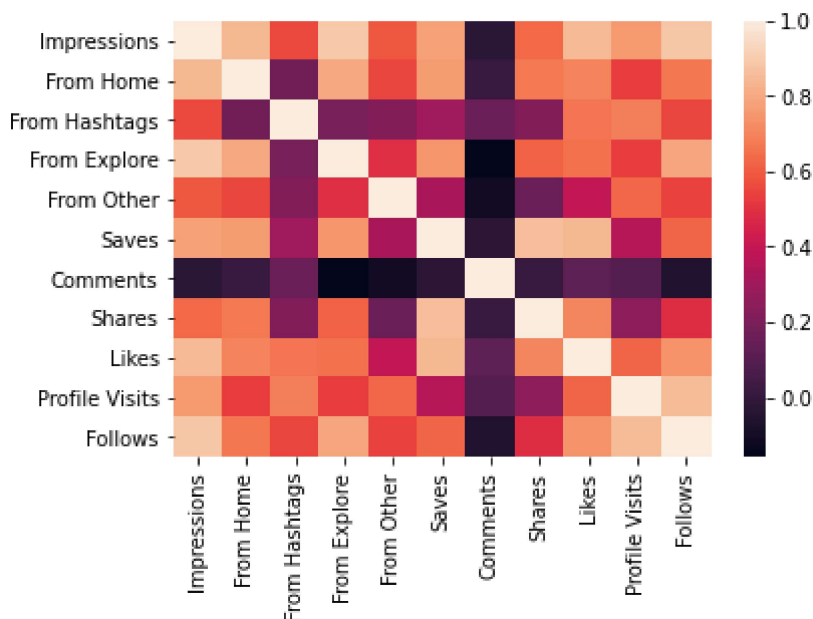 warnings.warn(msg, FutureWarning)

Out[8]: <AxesSubplot:xlabel='Follows', ylabel='Density'>

In [9]:
```python
df1 = df[['Impressions', 'From Home', 'From Hashtags', 'From Explore',
        'From Other', 'Saves', 'Comments', 'Shares', 'Likes', 'Profile Visits',
        'Follows', 'Caption', 'Hashtags']]
```

In [10]:
```python
sns.heatmap(df1.corr())
```

Out[10]: <AxesSubplot:>

In [11]:
```python
x = df1[['Impressions', 'From Home', 'From Hashtags', 'From Explore',
        'From Other', 'Saves', 'Comments', 'Shares', 'Likes', 'Profile Visits']]
y = df1['Follows']
```

split the data into training and test data

In [12]:
```python
x_train, x_test, y_train, y_test = train_test_split(x,y,test_size=0.3)
```

In [13]:
```python
lr = LinearRegression()
lr.fit(x_train, y_train)
```

Out[13]: LinearRegression()

In [14]:
```python
lr.intercept_
```

Out[14]: -2.445139943798008

In [15]:
```python
coeff = pd.DataFrame(lr.coef_, x.columns, columns =['Co-efficient'])
coeff
```
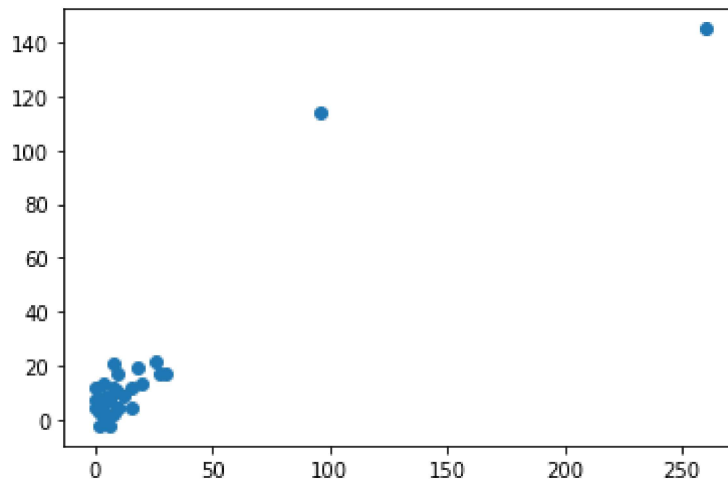
Out[15]:

	Co-efficient
Impressions	0.006917
From Home	-0.007751
From Hashtags	-0.006864
From Explore	-0.000201
From Other	-0.008724
Saves	0.012194
Comments	-0.470552
Shares	0.393468
Likes	0.018053
Profile Visits	0.220435

In [16]:
```python
prediction = lr.predict(x_test)
plt.scatter(y_test, prediction)
```

Out[16]: <matplotlib.collections.PathCollection at 0x253751e2460>

In [17]:
```python
lr.score(x_test,y_test)
```

Out[17]: 0.788861261227931