

Koi bhi bana hua resource ki koi bhi detail nikalne ke lie hum log use karte hai data block
Jaise har resource ka resource block hota hai vaise har resource ka data block bhi alg alg hota hai..

```
data "azurerm_subnet" "subnet" {
  for_each = var.nics
  name     = each.value.nic_subnet_name
  virtual_network_name = each.value.nic_vnet_name
  resource_group_name = each.value.nic_rg_name
}
```

data.azurerm_subnet.subnet[nic1].id

```
data "azurerm_subnet" "subnet[nic1]" {
  name           = "frontend-subnet"
  virtual_network_name = "vnet-chor"
  resource_group_name = "rg-chor"
}
```

```
data "azurerm_subnet" "subnet[nic2]" {
  name           = "backend-subnet"
  virtual_network_name = "vnet-chor"
  resource_group_name = "rg-chor"
}
```

```
data "azurerm_public_ip" "public_ip" {
  for_each = var.nics
  name     = each.value.nic_pip_name
  resource_group_name = each.value.nic_rg_name
}
```

```
data "azurerm_public_ip" "public_ip[nic1]" {
  name     = "pip-chor-frontend-vm"
  resource_group_name = "rg-chor"
}
```

```
data "azurerm_public_ip" "public_ip[nic2]" {
  name     = "pip-chor-backend-vm"
  resource_group_name = "rg-chor"
}
```

```
resource "azurerm_network_interface" "nic" {
  for_each = var.nics
  name     = each.value.nic_name
  location = each.value.nic_location
  resource_group_name = each.value.nic_rg_name

  ip_configuration {
    name               = "dhondhu"
    subnet_id          = data.azurerm_subnet.subnet[each.key].id
    public_ip_address_id = data.azurerm_public_ip.public_ip[each.key].id
    private_ip_address_allocation = "Dynamic"
  }
}
```

```
nics = {
  nic1 = {
    nic_name       = "frontend-vm-nic"
    nic_location   = "centralindia"
    nic_rg_name    = "rg-chor"
    nic_subnet_name = "frontend-subnet"
    nic_vnet_name  = "vnet-chor"
    nic_pip_name   = "pip-chor-frontend-vm"
  }
  nic2 = {
    nic_name       = "backend-vm-nic"
    nic_location   = "centralindia"
    nic_rg_name    = "rg-chor"
    nic_subnet_name = "backend-subnet"
    nic_vnet_name  = "vnet-chor"
    nic_pip_name   = "pip-chor-backend-vm"
  }
}
```

```
resource "azurerm_network_interface" "nic[nic1]" {
  name     = "frontend-vm-nic"
  location = "centralindia"
  resource_group_name = "rg-chor"



  ip_configuration {
    name               = "dhondhu"
    subnet_id          = data.azurerm_subnet.subnet[nic1].id
    public_ip_address_id = data.azurerm_public_ip.public_ip[nic1].id
    private_ip_address_allocation = "Dynamic"
  }
}
```

```
resource "azurerm_network_interface" "nic[nic2]" {
  name     = "backend-vm-nic"
  location = "centralindia"
  resource_group_name = "rg-chor"


  ip_configuration {
    name               = "dhondhu"
    subnet_id          = data.azurerm_subnet.subnet[nic2].id
    public_ip_address_id = data.azurerm_public_ip.public_ip[nic2].id
    private_ip_address_allocation = "Dynamic"
  }
}
```

Jisko each.key nahi smjh aaya vo isko ratt dalo mast..

Ek Vm pr multiple NIC attach ho skta hai

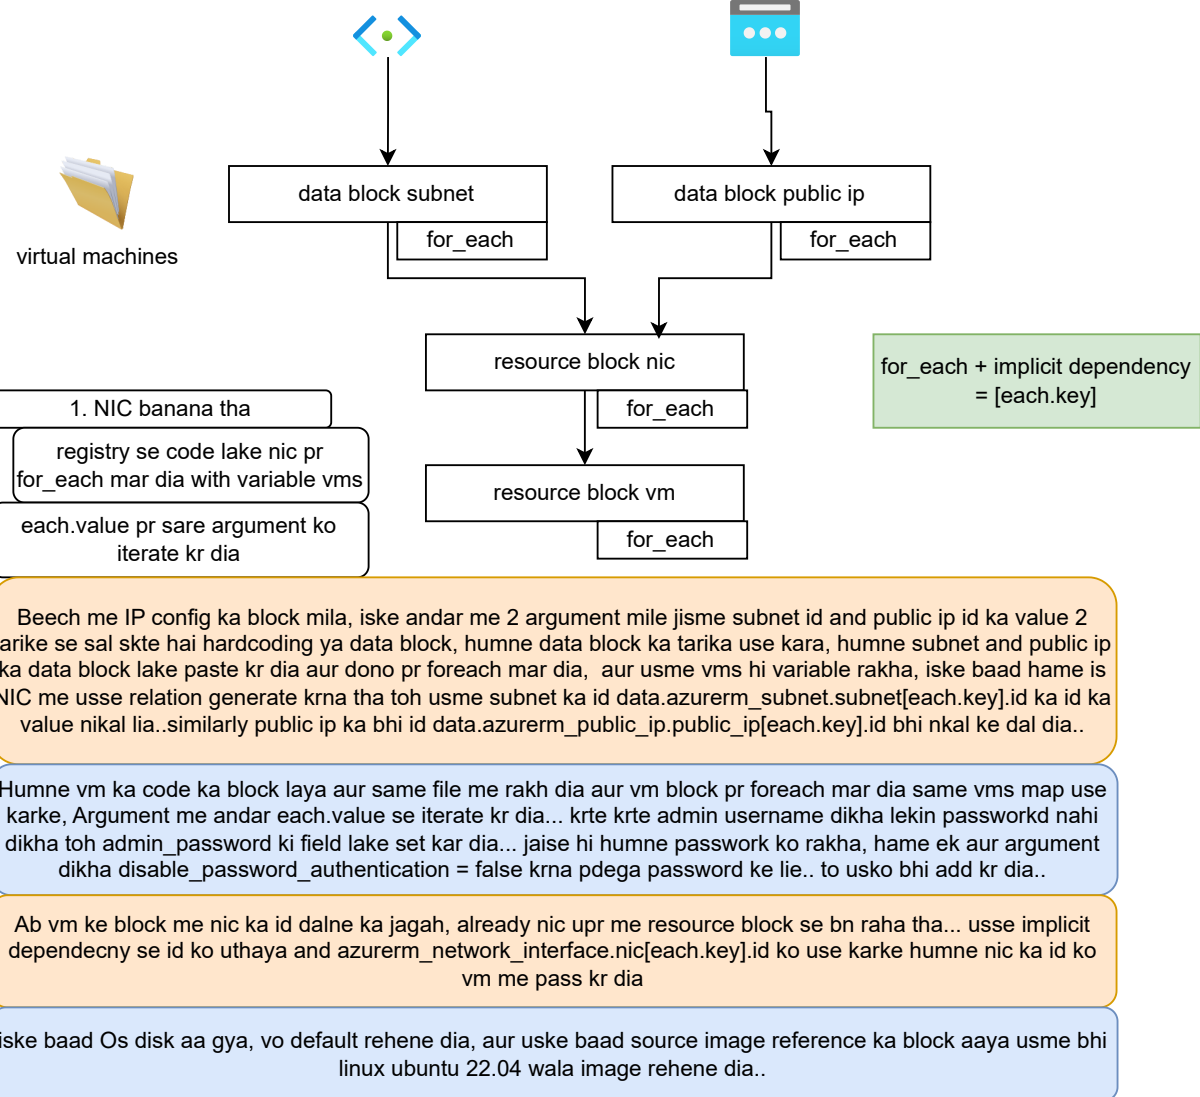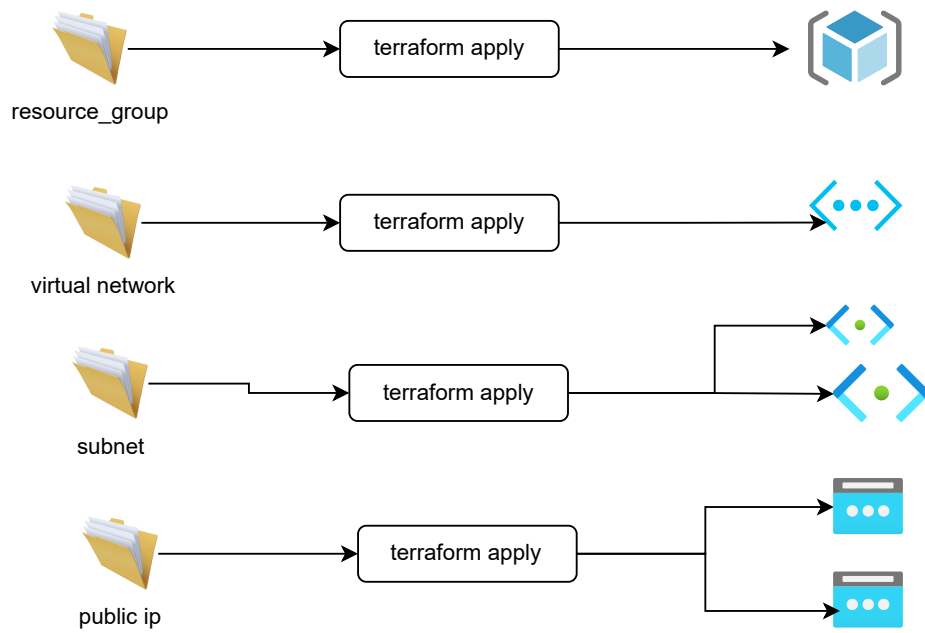

VM to banana sikh lie

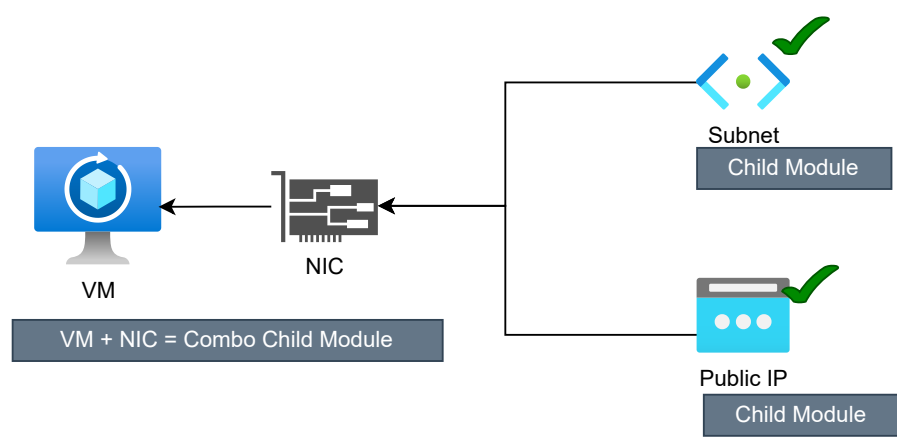

VM using one click fir se karenge

Tfvars bhi nahi banana pde?
1. user Input excel sheet se leke landing zone bn jae
2. Ek chatbot bana de, chatbot input leke terraform se bana de piche me

Ye hardcoded kia hua password bewafaa hai.. 🤨

Secret Scanning Tools

trufflehog

gitleaks

GitGuardian

detect-secrets

Local Computer pr secret ka report nikal ke kaise fix karenge

Secret ko rakhne ke lie keyvault banana pdega

Key vault banake secret ko rakhna pdega, waha se data block laga ke vm ke code me integrate karna pdega

Aaj ka Agenda

Revise One Click Deployment

Secret Scanning Tools

creation of keyvault

Store username/passwords

VM ke code ko data block se optimize karke secret.tfvars se hataenge

Fir se scan karenge aur secret nahi aaega toh mast so jaenge