

CASCADING STYLE SHEET

Dr.Priyanka N

Module:3	Cascading Style Sheets	2 hours
CSS Overview - CSS Rules, CSS Syntax and Style - Class Selectors, ID Selectors, span and div Elements - Cascading, style Attribute, style Container, External CSS Files - CSS Properties: Color Properties, Font Properties, line-height Property, Text Properties, Border Properties. Element Box, padding Property, margin Property - Hosting a Website and GIT.		

CSS MARGINS

CSS MARGINS

- Used to **create space around elements, outside of any defined borders.**

Margin - Individual Sides

- CSS has properties for specifying the margin for each side of an element:
 - margin-top
 - margin-right
 - margin-bottom
 - margin-left

Margin properties can have the following values:

- **auto** - the browser calculates the margin
- **length** - specifies a margin in px, pt, cm..
- **%** - specifies a margin in % of the width of the containing element
- **inherit** - specifies that the margin should be inherited from the parent element

CSS MARGINS (Example-1)

```
<!DOCTYPE html>
<html>
<head>
<style>
div {
  border: 5px solid red;
  background-color: lightblue;
}
</style>
</head>
<body>

<div>This div element has a top margin of 100px, a right margin of 150px, a
bottom margin of 100px, and a left margin of 80px.</div>

</body>
</html>
```

This div element has a top margin of 100px, a right margin of 150px, a bottom margin of 100px, and a left margin of 80px.



CSS MARGINS (Example-1)

```
<!DOCTYPE html>
<html>
<head>
<style>
.margin_property{
  border: 5px solid red;
  margin-top: 100px;
  margin-bottom: 100px;
  margin-right: 150px;
  margin-left: 80px;
  background-color: lightblue;
}
</style>
</head>
<body>

<h1 class="margin_property">Top margin of 100px, a right margin of 150px, a
bottom margin of 100px, and a left margin of 80px.</h1>

</body>
</html>
```

Top margin of 100px, a right margin of 150px, a bottom margin of 100px, and a left margin of 80px.

CSS MARGINS (Example-2)

```
<!DOCTYPE html>
<html>
<head>
<style>
div {
  border: 3px solid green;
  margin-top: 100px;
  margin-bottom: 100px;
  margin-right: 150px;
  margin-left: 80px;
  background-color: lightyellow;
}
</style>
</head>
<body>

<h2>Using individual margin properties</h2>

<div>This div element has a top margin of 100px, a right margin of 150px, a
bottom margin of 100px, and a left margin of 80px.</div>

</body>
</html>
```

Using individual margin properties

This div element has a top margin of 100px, a right margin of 150px, a bottom margin of 100px, and a left margin of 80px.

Margin - Shorthand Property

To shorten the code, it is possible to specify all the margin properties in one property.

The `margin` property is a shorthand property for the following individual margin properties:

- `margin-top`
- `margin-right`
- `margin-bottom`
- `margin-left`

So, here is how it works:

If the `margin` property has four values:

- **`margin: 25px 50px 75px 100px;`**
 - top margin is 25px
 - right margin is 50px
 - bottom margin is 75px
 - left margin is 100px

Margin - Shorthand Property

```
<!DOCTYPE html>
<html>
<head>
<style>
div {
  border: 5px solid green;
  margin: 25px 50px 75px 100px;
  background-color: lightblue;
}
</style>
</head>
<body>

<h2>The margin shorthand property - 4 values</h2>

<div>This div element has a top margin of 25px, a right
margin of 50px, a bottom margin of 75px, and a left margin of
100px.</div>

<hr>

</body>
</html>
```

The margin shorthand property - 4 values

This div element has a top margin of 25px, a right margin of 50px, a bottom margin of 75px, and a left margin of 100px.

Margin - Shorthand Property

If the margin property has three values:

• **margin: 25px 50px 75px;**

- top margin is 25px
- right and left margins are 50px
- bottom margin is 75px

```
<!DOCTYPE html>
<html>
<head>
<style>
div {
  border: 1px solid black;
  margin: 25px 50px 85px;
  background-color: lightblue;
}
</style>
</head>
<body>

<h2>The margin shorthand property - 3 values</h2>

<div>This div element has a top margin of 25px, a right and left margin of
50px, and a bottom margin of 85px.</div>

<h1>Hellooo students!!!!!!</h1>

<hr>

</body>
</html>
```

The margin shorthand property - 3 values

This div element has a top margin of 25px, a right and left margin of 50px, and a bottom margin of 85px.

Hellooo students!!!!!!

Margin - Shorthand Property

If the `margin` property has two values:

- **`margin: 25px 50px;`**
 - top and bottom margins are 25px
 - right and left margins are 50px

Example

Use the margin shorthand property with two values:

```
p {  
  margin: 25px 50px;  
}
```

If the `margin` property has one value:

- **`margin: 25px;`**
 - all four margins are 25px

Example

Use the margin shorthand property with one value:

```
p {  
  margin: 25px;  
}
```

CSS MARGINS (CONTD...)

auto Value:

- Set the margin property to auto to horizontally center the element within its container.
- The element will then take up the specified width, and the remaining space will be split equally between the left and right margins.

Margin - Shorthand Property

auto Value

```
<!DOCTYPE html>
<html>
<head>
<style>
div {
  width: 300px;
  margin: auto;
  border: 1px solid red;
}
</style>
</head>
<body>
```

```
<h2>Use of margin: auto</h2>
```

```
<p>You can set the margin property to auto to horizontally center the
element within its container. The element will then take up the specified
width, and the remaining space will be split equally between the left and
right margins:</p>
```

```
<div>
This div will be horizontally centered because it has margin: auto;
</div>
```

```
</body>
</html>
```

Use of margin: auto

You can set the margin property to auto to horizontally center the element within its container. The element will then take up the specified width, and the remaining space will be split equally between the left and right margins:

This div will be horizontally centered because it has margin: auto;

CSS MARGINS (CONTD...)

inherit Value:

- margin of the element is inherited from the parent element

```
div {  
  border: 1px solid red; margin-left: 100px;  
}  
  
p.ex1 {  
  margin-left: inherit;  
}
```

Margin - Shorthand Property

The inherit Value

```
<!DOCTYPE html>
<html>
<head>
<style>
div {
  border: 1px solid red;
  margin-left: 45px;
}

p.ex1 {
  margin-left: inherit;
}
</style>
</head>
<body>

<h2>Use of the inherit value</h2>
<p>Let the left margin be inherited from the parent element:</p>

<div>
<p class="ex1">This paragraph has an inherited left margin (from the div
element).</p>
</div>

</body>
</html>
```

Use of the inherit value

Let the left margin be inherited from the parent element:

This paragraph has an inherited left margin (from the div element).

CSS PADDING

CSS PADDING

- Padding is used to create space around an element's content, inside of any defined borders.

Padding - Individual Sides

- padding-top
- padding-right
- padding-bottom
- padding-left

CSS PADDING

Properties can have the following values:

- **length** - specifies a padding in px, pt, cm, etc.
- **%** - specifies a padding in % of the width of the containing element
- **inherit** - specifies that the padding should be inherited from the parent element
- Negative values are not allowed.

CSS PADDING

```
<!DOCTYPE html>
<html>

<head>
<style>
h2 {
  border: 1px solid black;
  padding-top: 25px;
  background-color: lightblue;
}
</style>

</head>

<body>

<h2>Each of us remembers our student life differently. This student life
essay in English will be useful for your kids to understand the importance
of student life.</h2>

</body>
</html>
```

Each of us remembers our student life differently. This student life essay in English will be useful for your kids to understand the importance of student life.

PADDING-top

PADDING- bottom

```
<!DOCTYPE html>
<html>

<head>
<style>
h2 {
  border: 1px solid black;
  padding-bottom: 25px;
  background-color: lightblue;
}
</style>

</head>

<body>

<h2>Each of us remembers our student life differently. This student life
essay in English will be useful for your kids to understand the importance
of student life.</h2>

</body>
</html>
```

Each of us remembers our student life differently. This student life essay in English will be useful for your kids to understand the importance of student life.

CSS PADDING

PADDING shorthand property

```
<!DOCTYPE html>
<html>

<head>
<style>
h2 {
  border: 1px solid black;
  padding: 25px 50px 75px 100px;
  background-color: lightblue;
}
</style>

</head>

<body>

<h2>Each of us remembers our student life differently. This student life
essay in English will be useful for your kids to understand the importance
of student life.</h2>


</body>
</html>
```

**Each of us remembers our student life differently.
This student life essay in English will be useful for
your kids to understand the importance of student
life.**

Task-18

Use this section to check your work. On *these* projects, your goal isn't to attain 100% pixel perfection, but to use the tools you've learned to get relatively close to the desired output.

- Div One and Div Three have 32px between their text and border.
- Div One has 12px between it and any other element on the page.
- There is a 48px gap between Div Two and Div Three.
- Div Three is aligned to the right.
- Div Three's alignment is achieved using margin (and not float, flexbox, etc.).

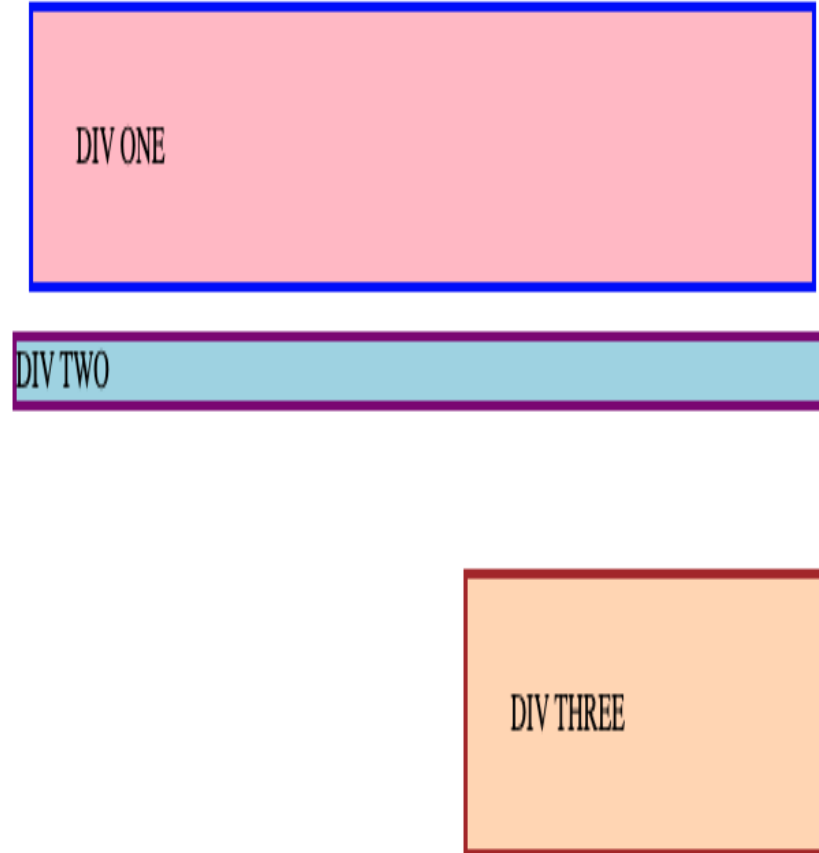

Task-19

My Blog 😊

My name is (ADD YOUR NAME HERE)

People ask me all the time — why do you like coding? Isn't it really hard? Isn't the work boring? Do you still have a social life?

You get to work on exciting projects! What is cool about being a coder is that you have control over how an application or website or whatever you create works!

SUBMIT