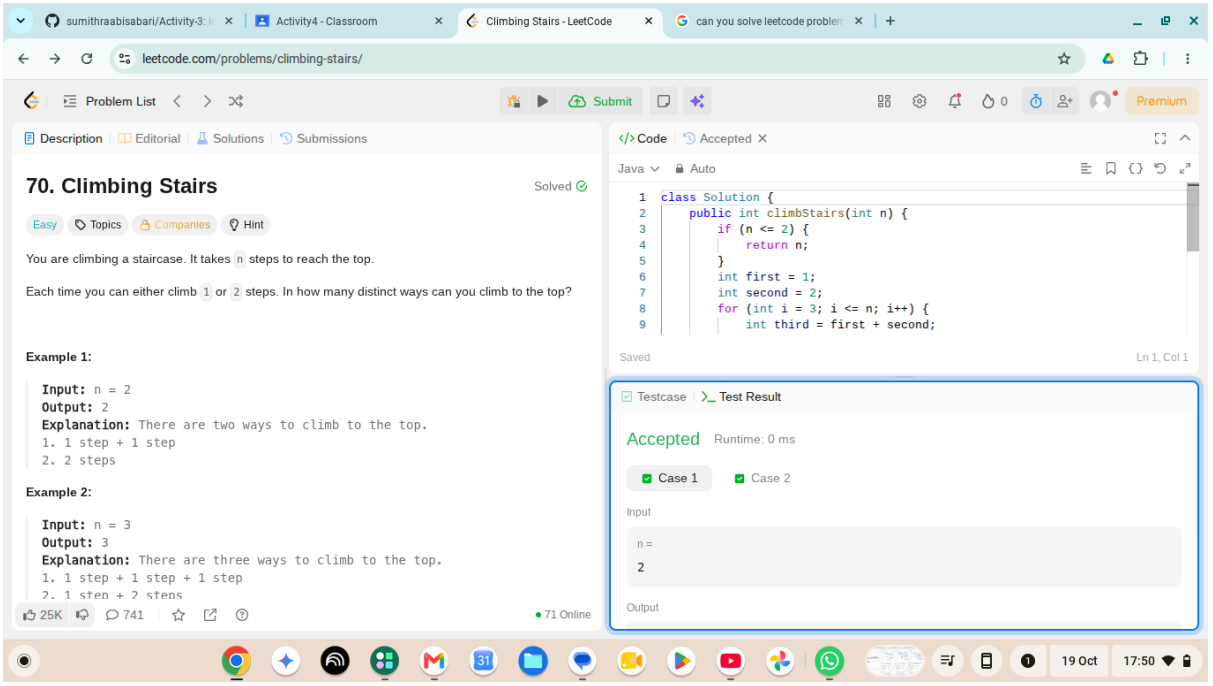
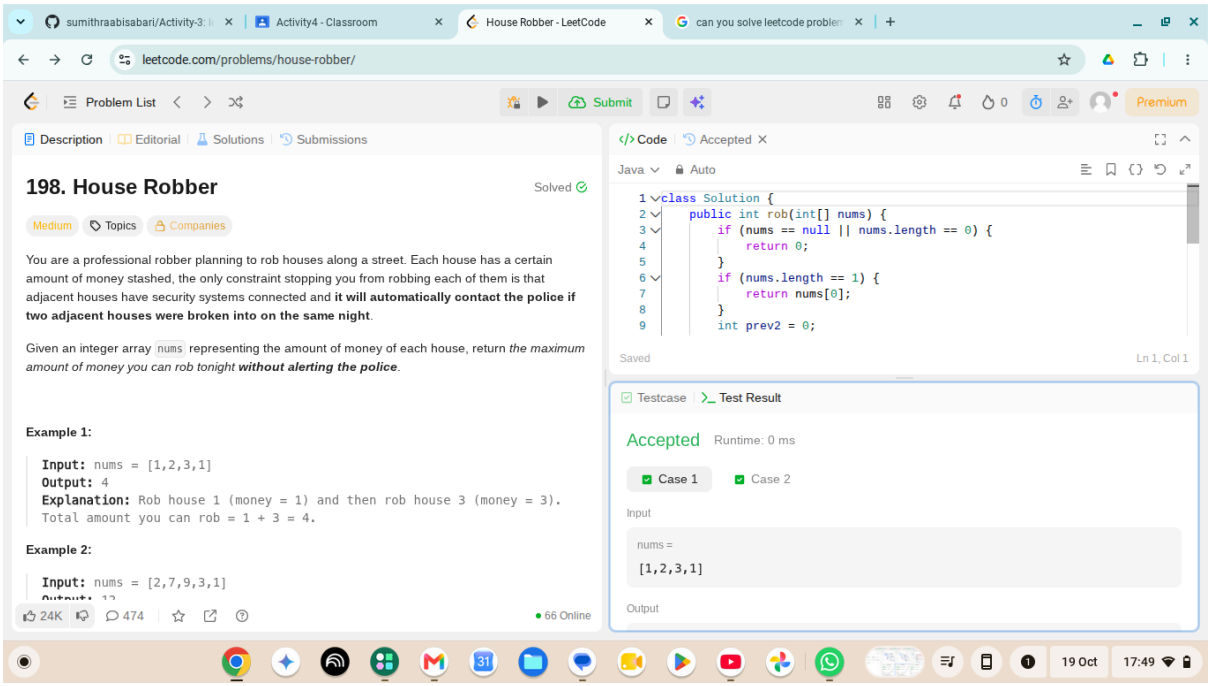
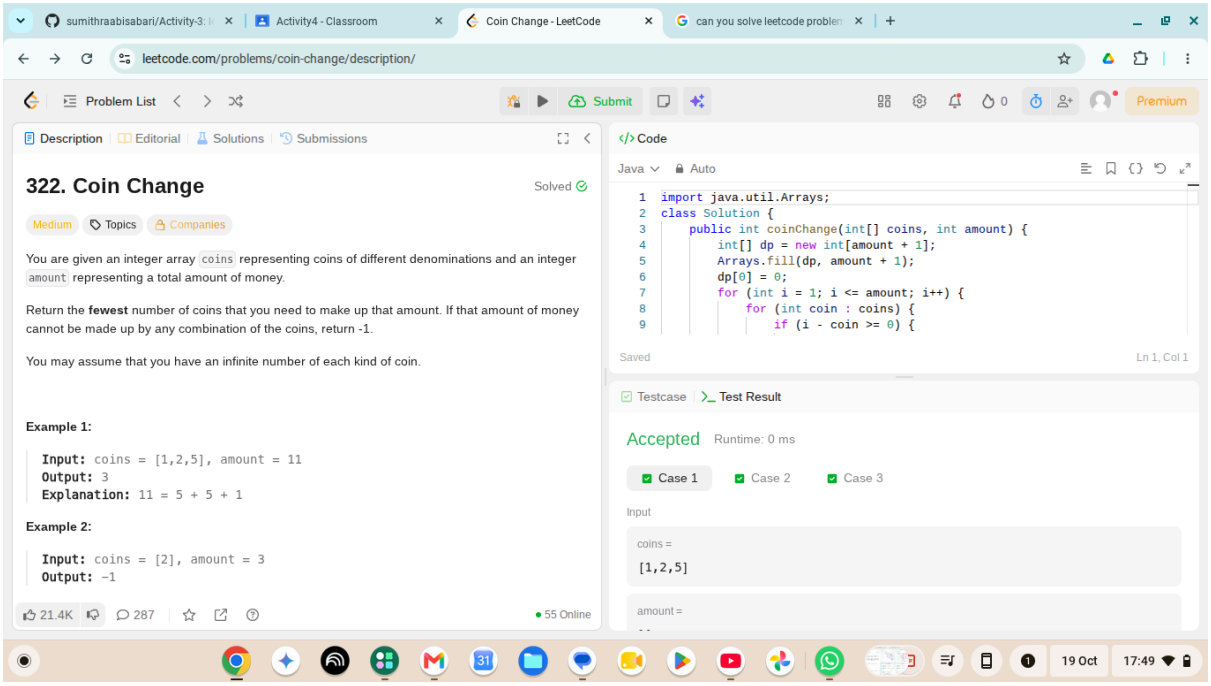
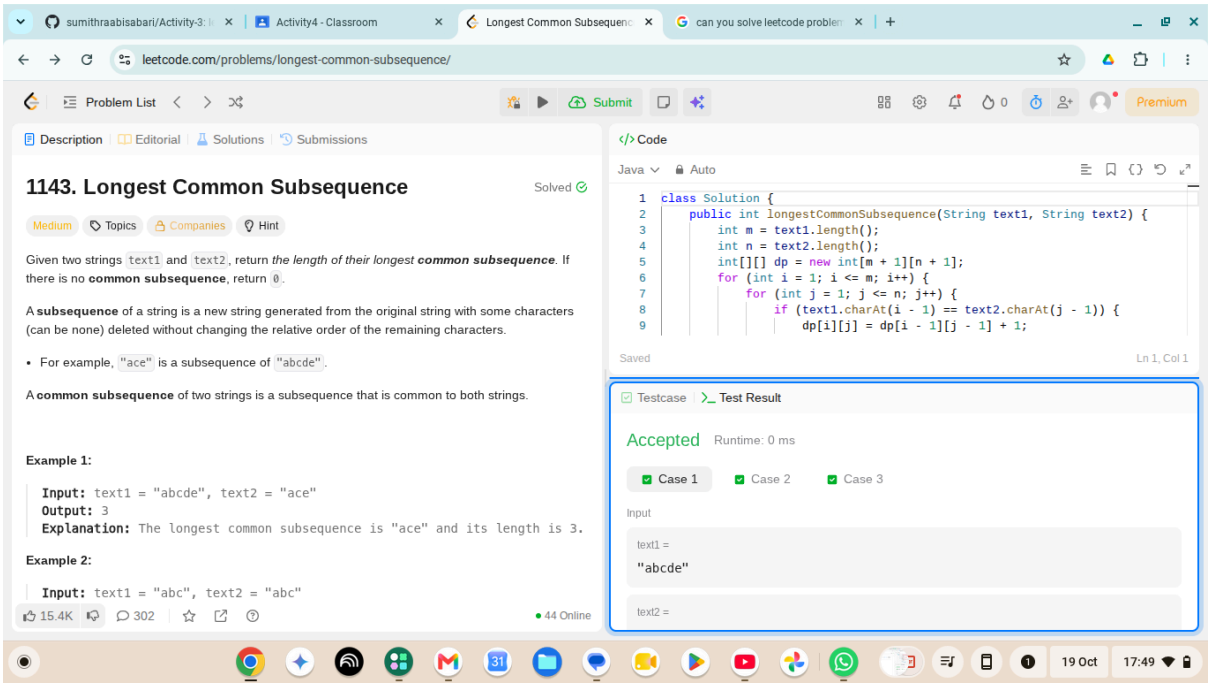
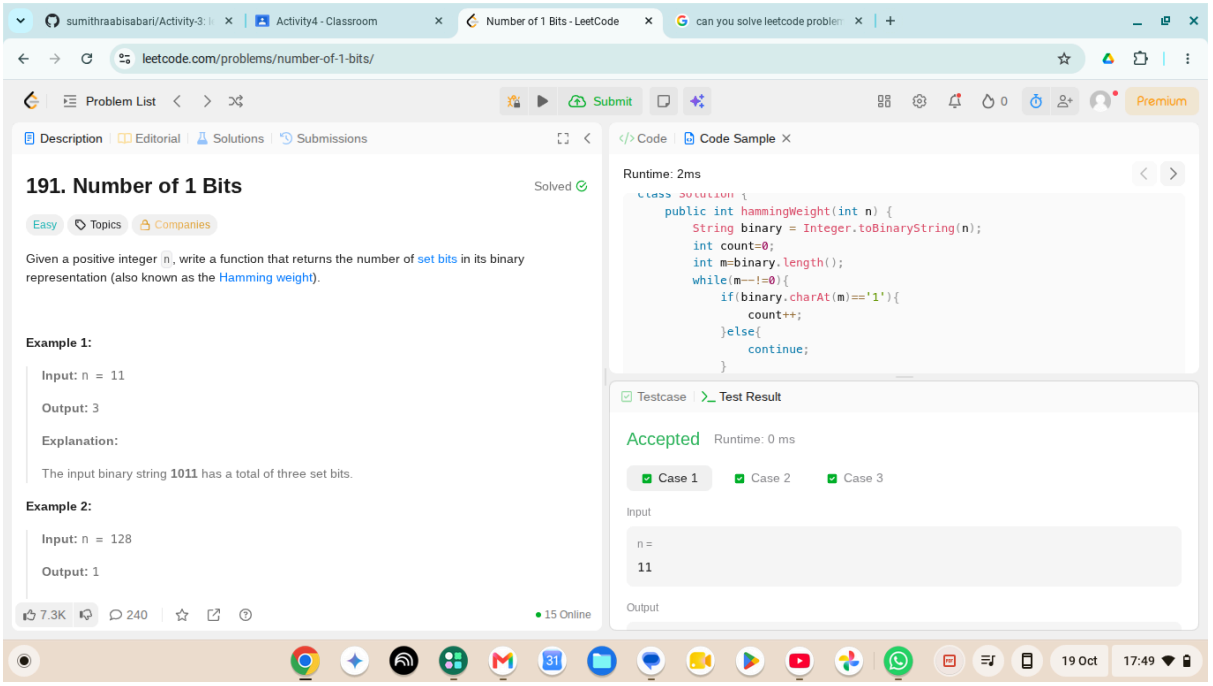

Activity4 - Classroom
Climbing Stairs - LeetCode
leetcode.com/problems/climbing-stairs/
Problem List
Submit
Premium
Description
Editorial
Solutions
Submissions
70. Climbing Stairs
Solved
Easy
Topics
Companies
Hint
You are climbing a staircase. It takes n steps to reach the top.
Each time you can either climb 1 or 2 steps. In how many distinct ways can you climb to the top?
Example 1:
Input: n = 2
Output: 2
Explanation: There are two ways to climb to the top.
1. 1 step + 1 step
2. 2 steps
Example 2:
Input: n = 3
Output: 3
Explanation: There are three ways to climb to the top.
1. 1 step + 1 step + 1 step
2. 1 step + 2 steps
25K
741
71 Online
Code
Accepted
Java
Auto
class Solution {
public int climbStairs(int n) {
if (n <= 2) {
return n;
}
int first = 1;
int second = 2;
for (int i = 3; i <= n; i++) {
int third = first + second;
Saved
Ln 1, Col 1
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Input
n =
2
Output
19 Oct
17:50


Activity4 - Classroom
House Robber - LeetCode
leetcode.com/problems/house-robber/
Problem List
Submit
Premium
Description
Editorial
Solutions
Submissions
198. House Robber
Solved
Medium
Topics
Companies
You are a professional robber planning to rob houses along a street. Each house has a certain amount of money stashed, the only constraint stopping you from robbing each of them is that adjacent houses have security systems connected and it will automatically contact the police if two adjacent houses were broken into on the same night.
Given an integer array nums representing the amount of money of each house, return the maximum amount of money you can rob tonight without alerting the police.
Example 1:
Input: nums = [1,2,3,1]
Output: 4
Explanation: Rob house 1 (money = 1) and then rob house 3 (money = 3).
Total amount you can rob = 1 + 3 = 4.
Example 2:
Input: nums = [2,7,9,3,1]
24K
474
66 Online
Code
Accepted
Java
Auto
class Solution {
public int rob(int[] nums) {
if (nums == null || nums.length == 0) {
return 0;
}
if (nums.length == 1) {
return nums[0];
}
int prev2 = 0;
Saved
Ln 1, Col 1
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Input
nums =
[1,2,3,1]
Output
19 Oct
17:49


sumithraabisabari/Activity-3:
Activity4 - Classroom
Coin Change - LeetCode
can you solve leetcode problem
leetcode.com/problems/coin-change/description/
Problem List
Submit
Premium
Description
Editorial
Solutions
Submissions
322. Coin Change
Solved
Medium
Topics
Companies
You are given an integer array coins representing coins of different denominations and an integer amount representing a total amount of money.
Return the fewest number of coins that you need to make up that amount. If that amount of money cannot be made up by any combination of the coins, return -1.
You may assume that you have an infinite number of each kind of coin.
Example 1:
Input: coins = [1,2,5], amount = 11
Output: 3
Explanation: 11 = 5 + 5 + 1
Example 2:
Input: coins = [2], amount = 3
Output: -1
21.4K
287
55 Online
Code
Java
Auto
import java.util.Arrays;
class Solution {
public int coinChange(int[] coins, int amount) {
int[] dp = new int[amount + 1];
Arrays.fill(dp, amount + 1);
dp[0] = 0;
for (int i = 1; i <= amount; i++) {
for (int coin : coins) {
if (i - coin >= 0) {
Saved
Ln 1, Col 1
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
Input
coins =
[1,2,5]
amount =
19 Oct
17:49


sumithraabisabari/Activity-3:
Activity4 - Classroom
Longest Common Subsequenc
can you solve leetcode problem
leetcode.com/problems/longest-common-subsequence/
Problem List
Submit
Premium
Description
Editorial
Solutions
Submissions
1143. Longest Common Subsequence
Solved
Medium
Topics
Companies
Hint
Given two strings text1 and text2, return the length of their longest common subsequence. If there is no common subsequence, return 0.
A subsequence of a string is a new string generated from the original string with some characters (can be none) deleted without changing the relative order of the remaining characters.
For example, "ace" is a subsequence of "abcde".
A common subsequence of two strings is a subsequence that is common to both strings.
Example 1:
Input: text1 = "abcde", text2 = "ace"
Output: 3
Explanation: The longest common subsequence is "ace" and its length is 3.
Example 2:
Input: text1 = "abc", text2 = "abc"
15.4K
302
44 Online
Code
Java
Auto
class Solution {
public int longestCommonSubsequence(String text1, String text2) {
int m = text1.length();
int n = text2.length();
int[][] dp = new int[m + 1][n + 1];
for (int i = 1; i <= m; i++) {
for (int j = 1; j <= n; j++) {
if (text1.charAt(i - 1) == text2.charAt(j - 1)) {
dp[i][j] = dp[i - 1][j - 1] + 1;
Saved
Ln 1, Col 1
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
Input
text1 =
"abcde"
text2 =
19 Oct
17:49


sumithraabisabari/Activity-3:
Activity4 - Classroom
Number of 1 Bits - LeetCode
can you solve leetcode problem
leetcode.com/problems/number-of-1-bits/
Problem List
Submit
Premium
Description
Editorial
Solutions
Submissions
191. Number of 1 Bits
Solved
Easy
Topics
Companies
Given a positive integer n, write a function that returns the number of set bits in its binary representation (also known as the Hamming weight).
Example 1:
Input: n = 11
Output: 3
Explanation:
The input binary string 1011 has a total of three set bits.
Example 2:
Input: n = 128
Output: 1
7.3K
240
15 Online
Code
Code Sample
Runtime: 2ms
class Solution {
public int hammingWeight(int n) {
String binary = Integer.toBinaryString(n);
int count=0;
int m=binary.length();
while(m--!=0){
if(binary.charAt(m)=='1'){
count++;
}else{
continue;
}
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
Input
n =
11
Output
19 Oct
17:49